

Report No.: 32.06519 Tracklight

Test Time: 2023-07-07 11:45

Luminaire Property

Luminaire Category: Citizen 1204 3000K CRI90

Voltage: 217.0 V

Current: 0.115 A

Power: 24.40 W

Power Factor: 0.977

Photometric Results

CIE Class: Direct

Measurement Flux: 2028.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H47

Vertical Diffuse Angle(50%): V47

Luminaire Efficacy Rating (LER): 83

Max. Intensity: 3389.58 cd

Total Rated Lamp Lumens: 2028.8 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3389.57 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

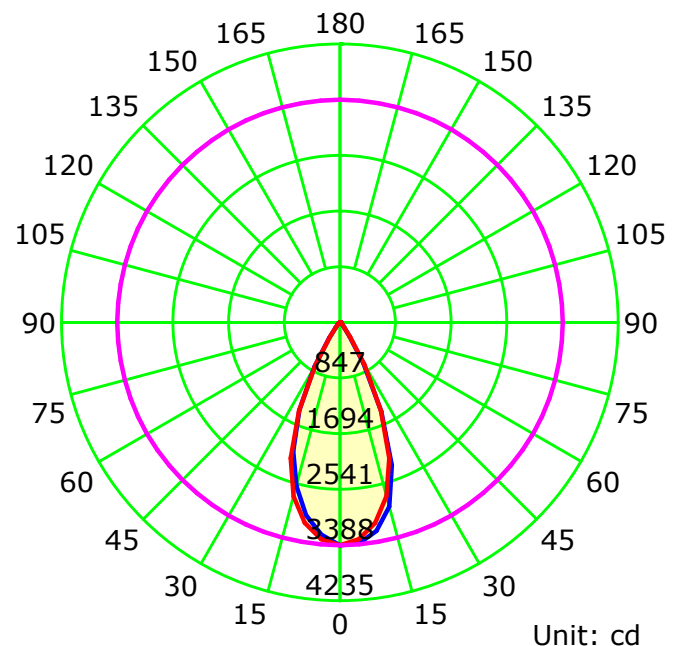

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

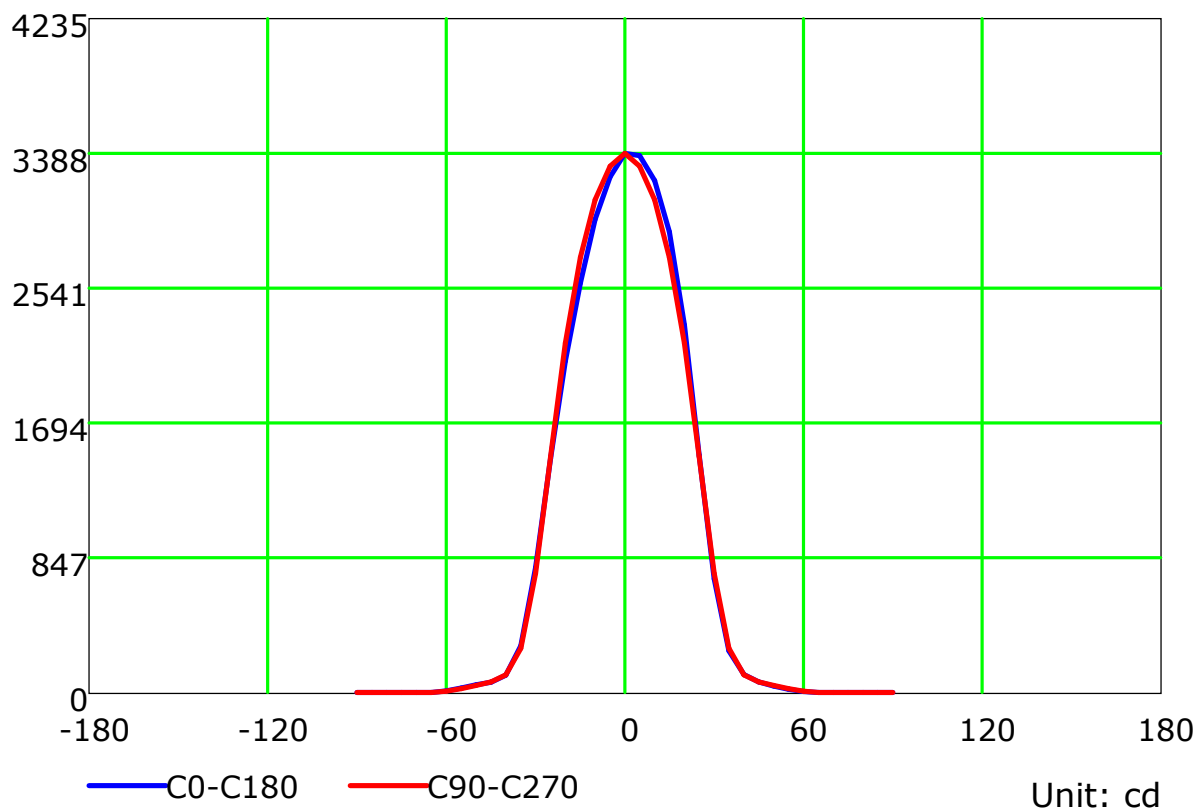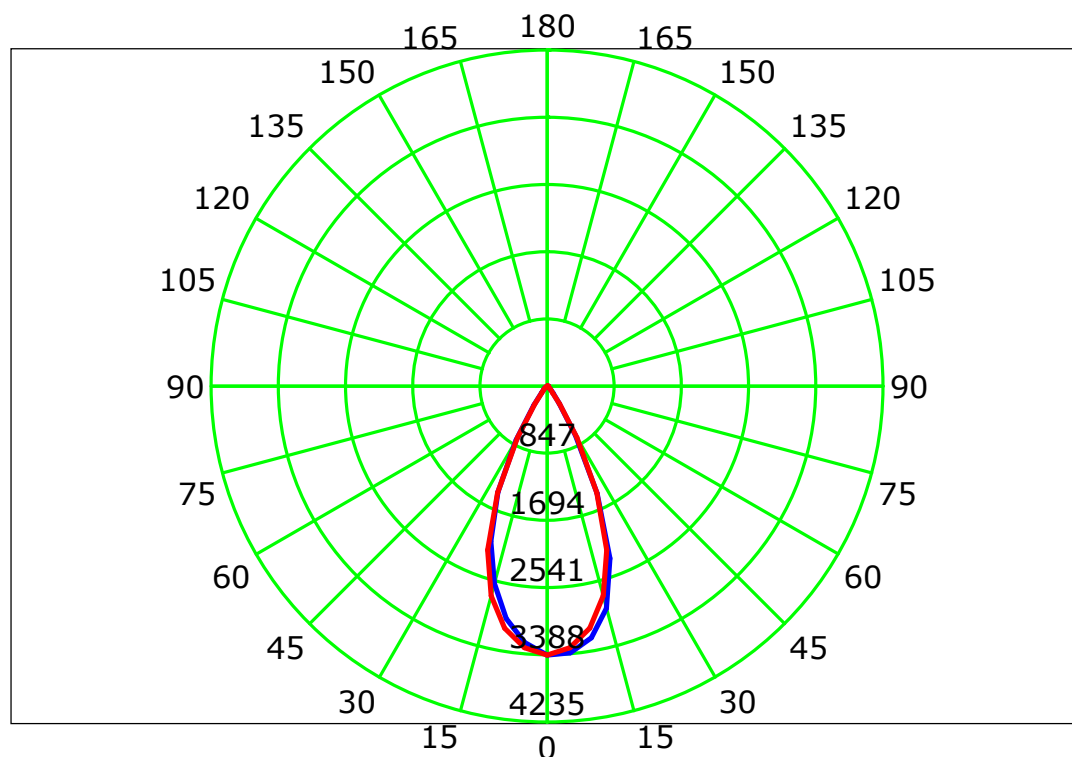


Unit: cd

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

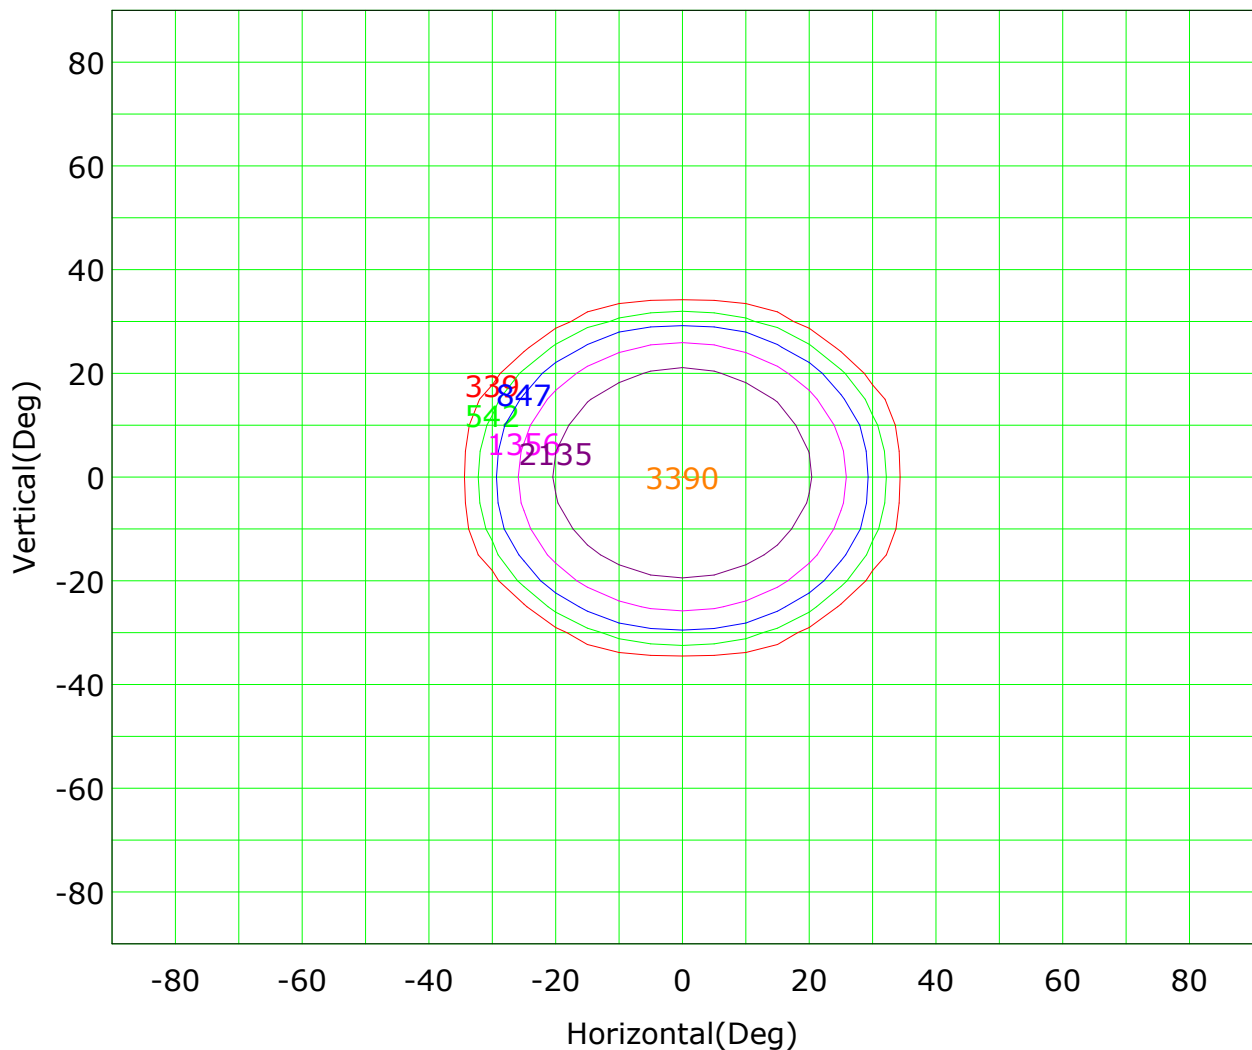

Imax (100%): 3390 cd

(10%): 339 cd	(16%): 542 cd
(25%): 847 cd	(40%): 1356 cd
(63%): 2135 cd	(100%): 3390 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

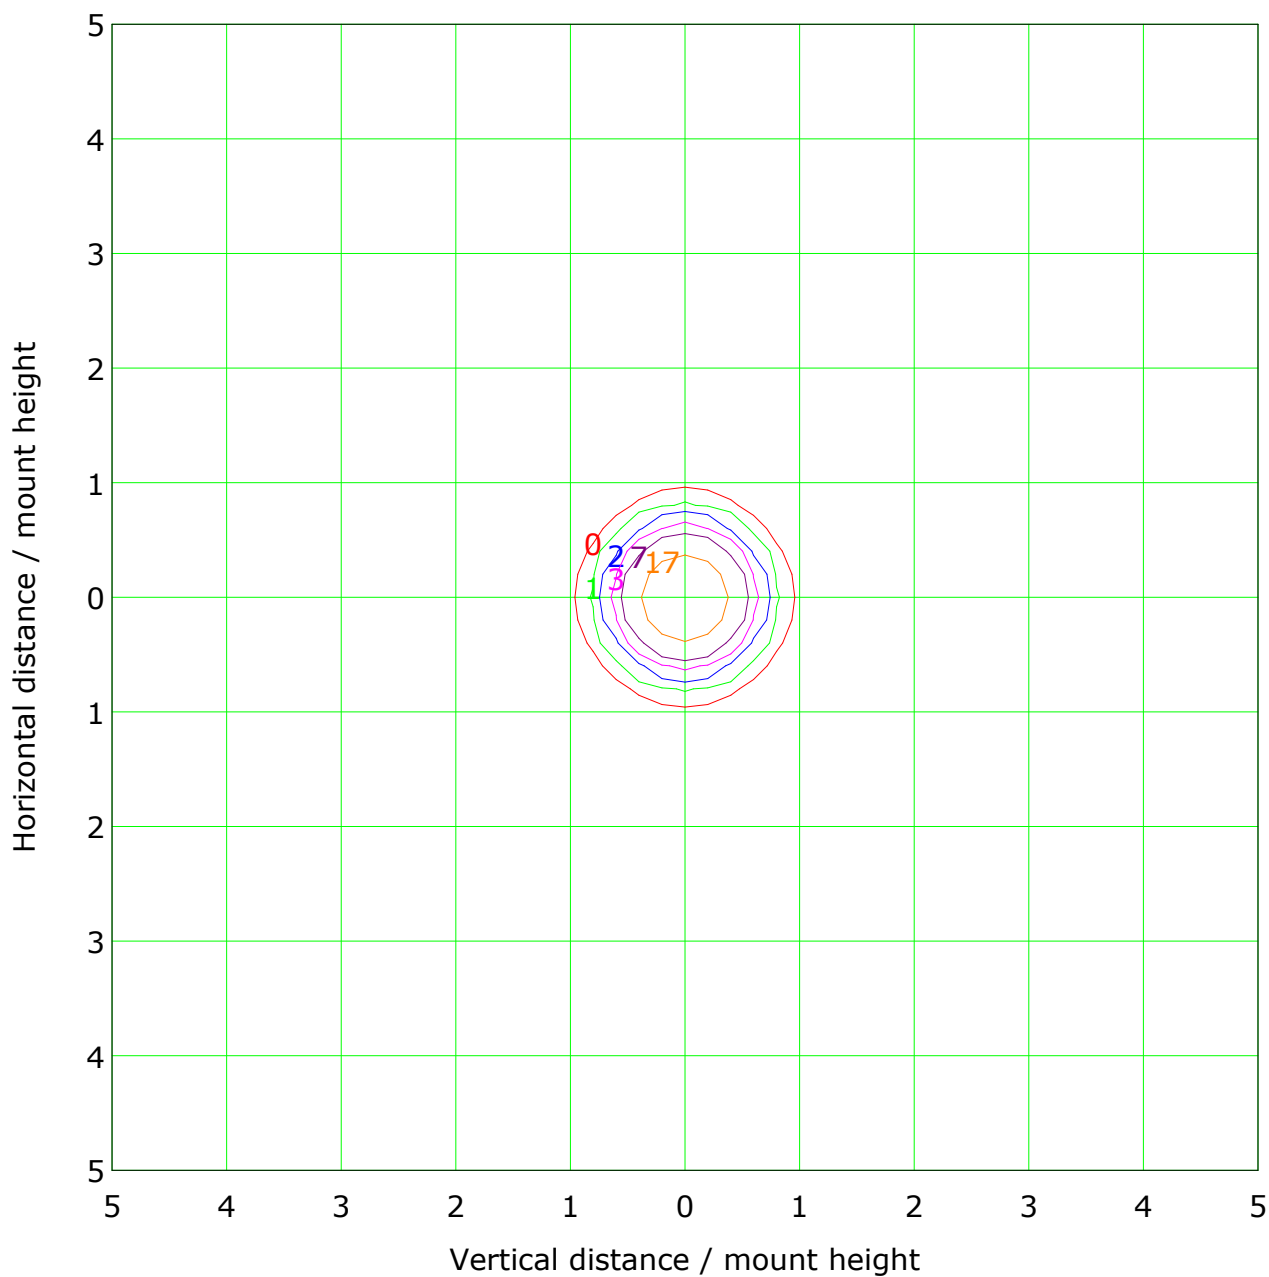


Mounting Height: 10m		Max Lux(100%): 34 lx	
(1%):	0 lx	(2%):	1 lx
(5%):	2 lx	(10%):	3 lx
(20%):	7 lx	(50%):	17 lx
(100%):	34 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

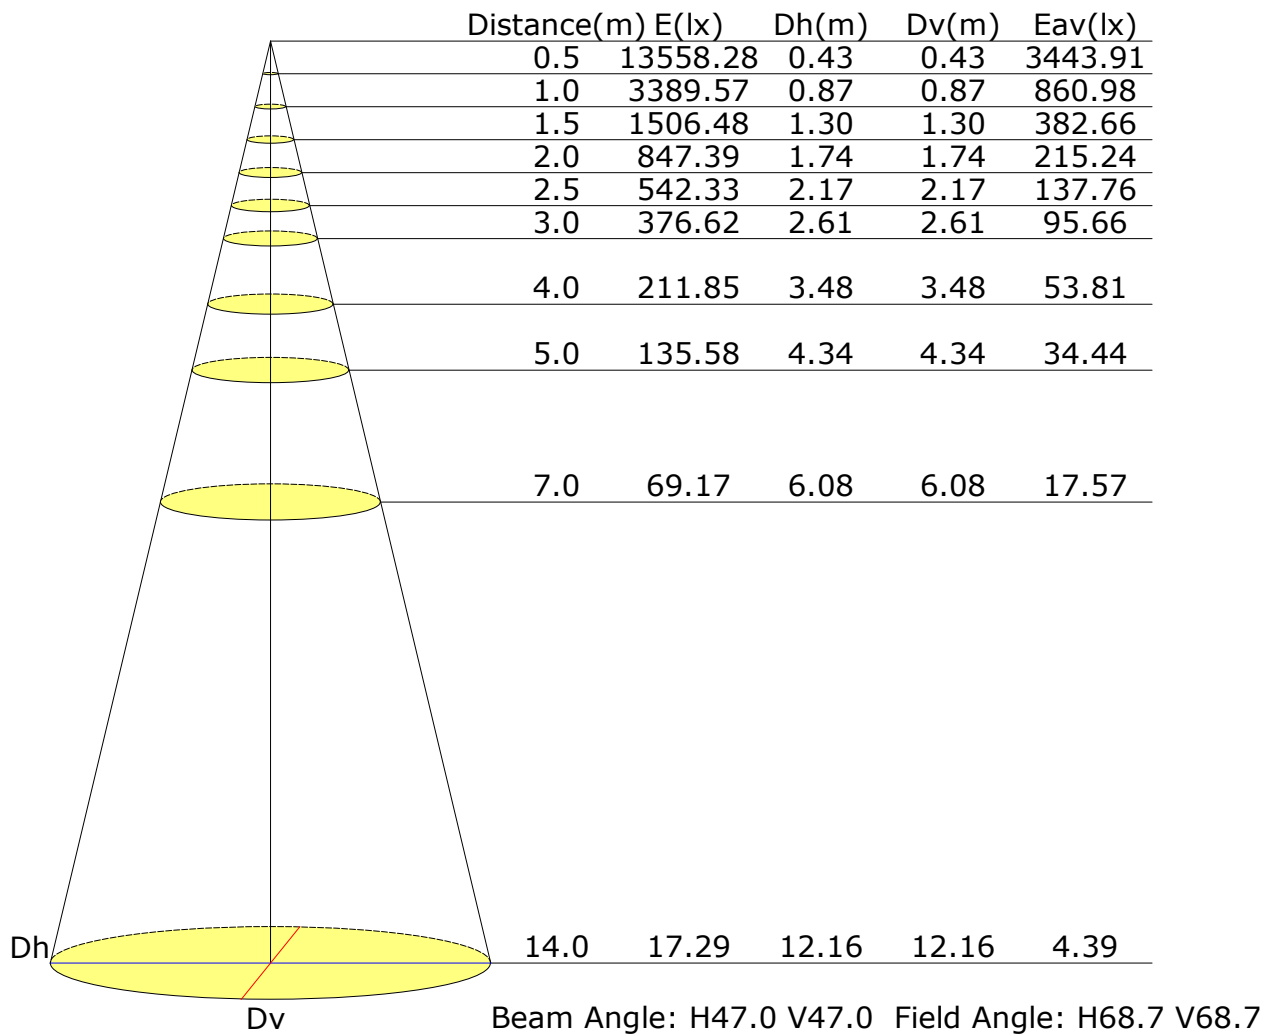

Vertical IsoLux Plot

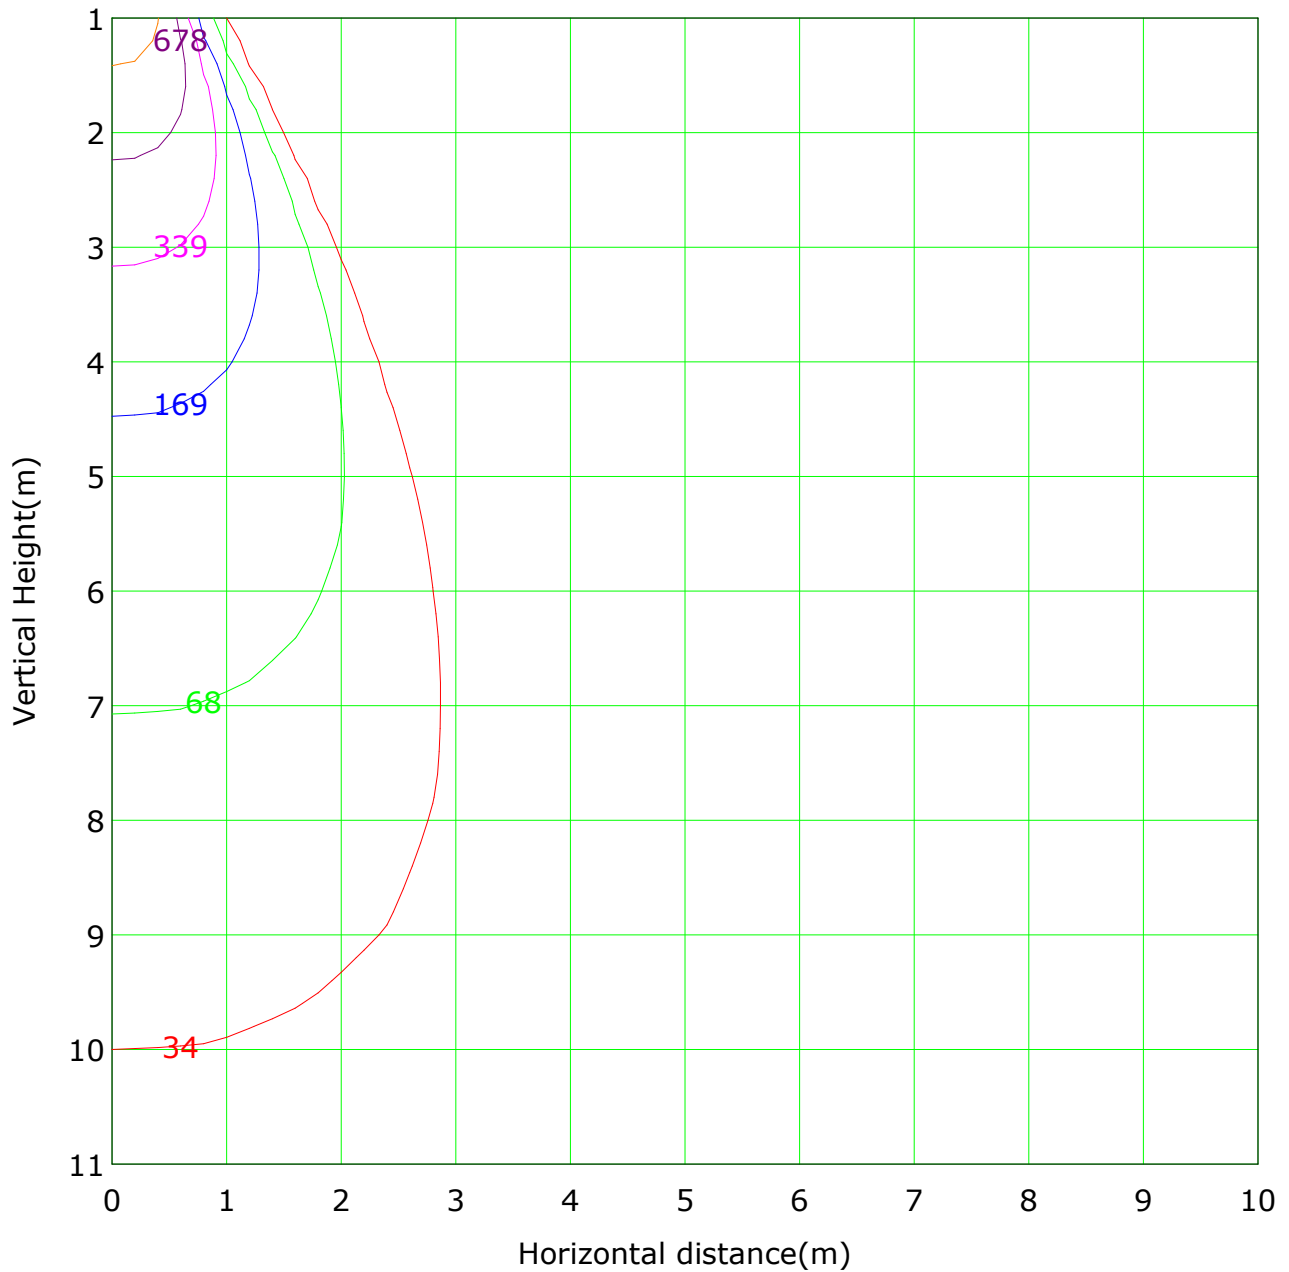


Lowest(m): 1m Highest(m): 11 Max Lux: 3390

(1%): 34 lx	(2%): 68 lx
(5%): 169 lx	(10%): 339 lx
(20%): 678 lx	(50%): 1695 lx
(100%): 3390 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

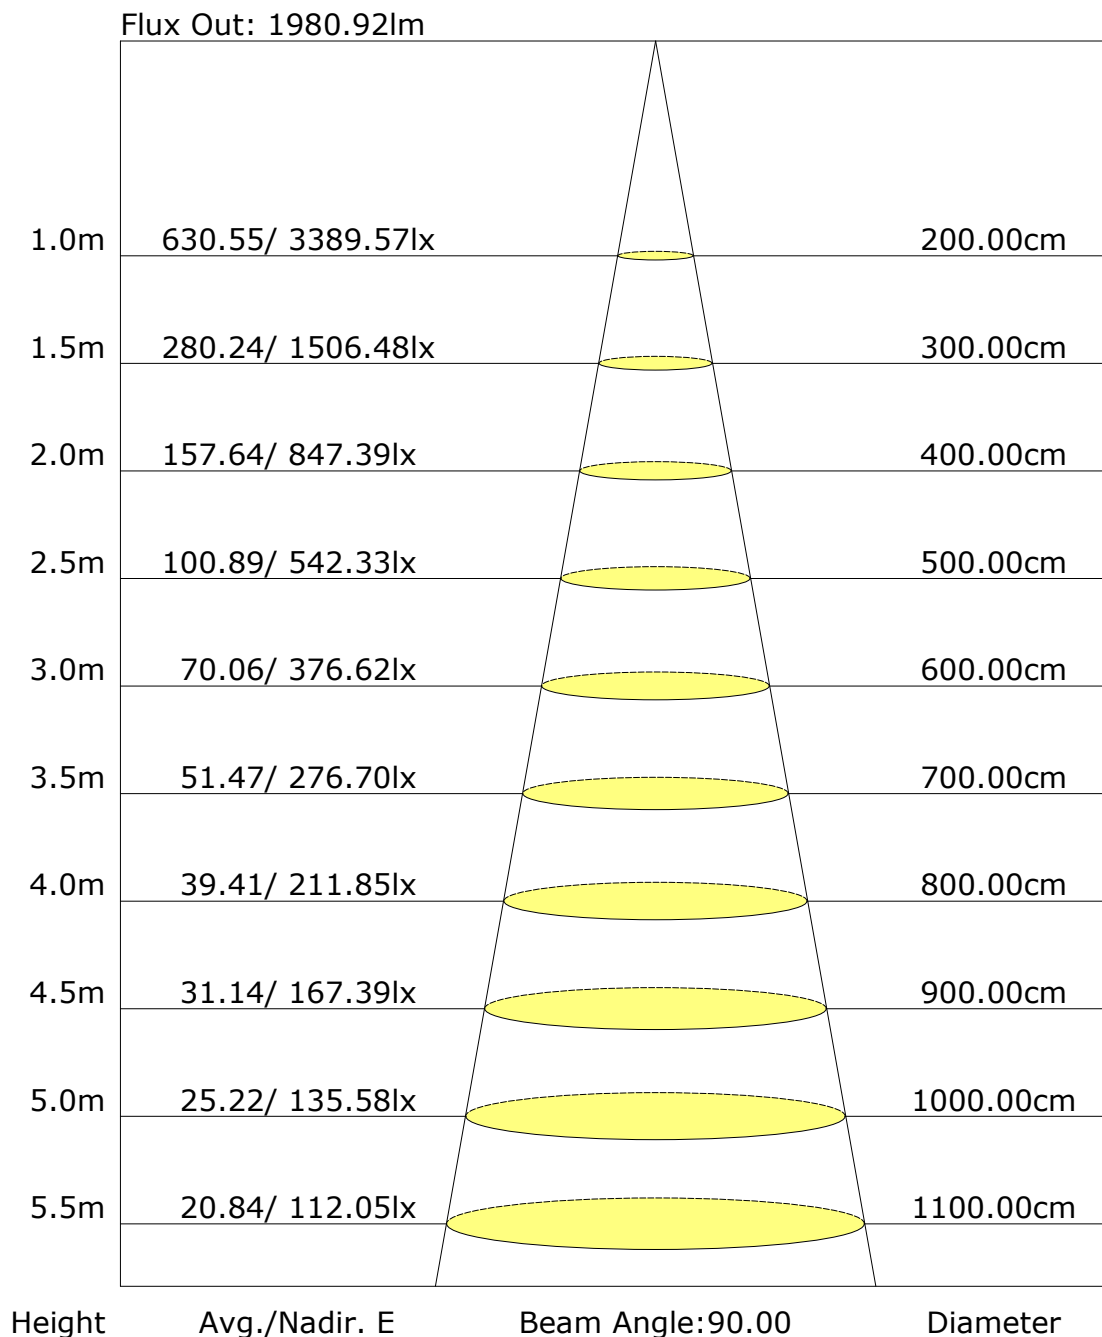

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: