






61.02356



61.02357

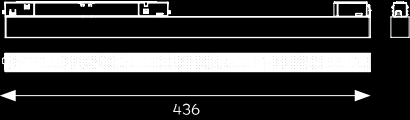

61.02358

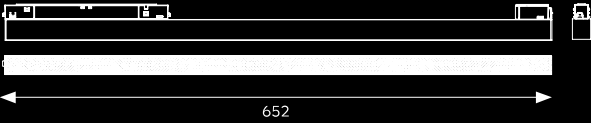

MAGENTRA

LOW VOLTAGE LINEAR LIGHT MICROPRISMATIC

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types

L=220/436/652

Colours

White Black

Light distributions

wide
flood

MAGENTRA

LOW VOLTAGE LINEAR LIGHT MICROPRISMATIC

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE L220

wide flood 90°

BEAM ANGLE L436

wide flood 90°

BEAM ANGLE L652

wide flood 90°



MAGENTRA GENERAL LIGHTING


CRI
>90

SMD

48V

IP20

DALI



LOW VOLTAGE LINEAR LIGHT MICROPRISMATIC

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	835lm	61.02356
	4000K	876lm	



MAGENTRA GENERAL LIGHTING


CRI
>90

SMD

48V


IP20

DALI



LOW VOLTAGE LINEAR LIGHT MICROPRISMATIC

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
20W 36V 500MA	3000K	1831lm	61.02357
	4000K	1922lm	



MAGENTRA GENERAL LIGHTING


CRI
>90

SMD

48V

IP20

DALI



LOW VOLTAGE LINEAR LIGHT MICROPRISMATIC

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
27W 36V 700MA	3000K	2642lm	61.02358
	4000K	2774lm	