




SOFT

RECESSED DOWNLIGHT



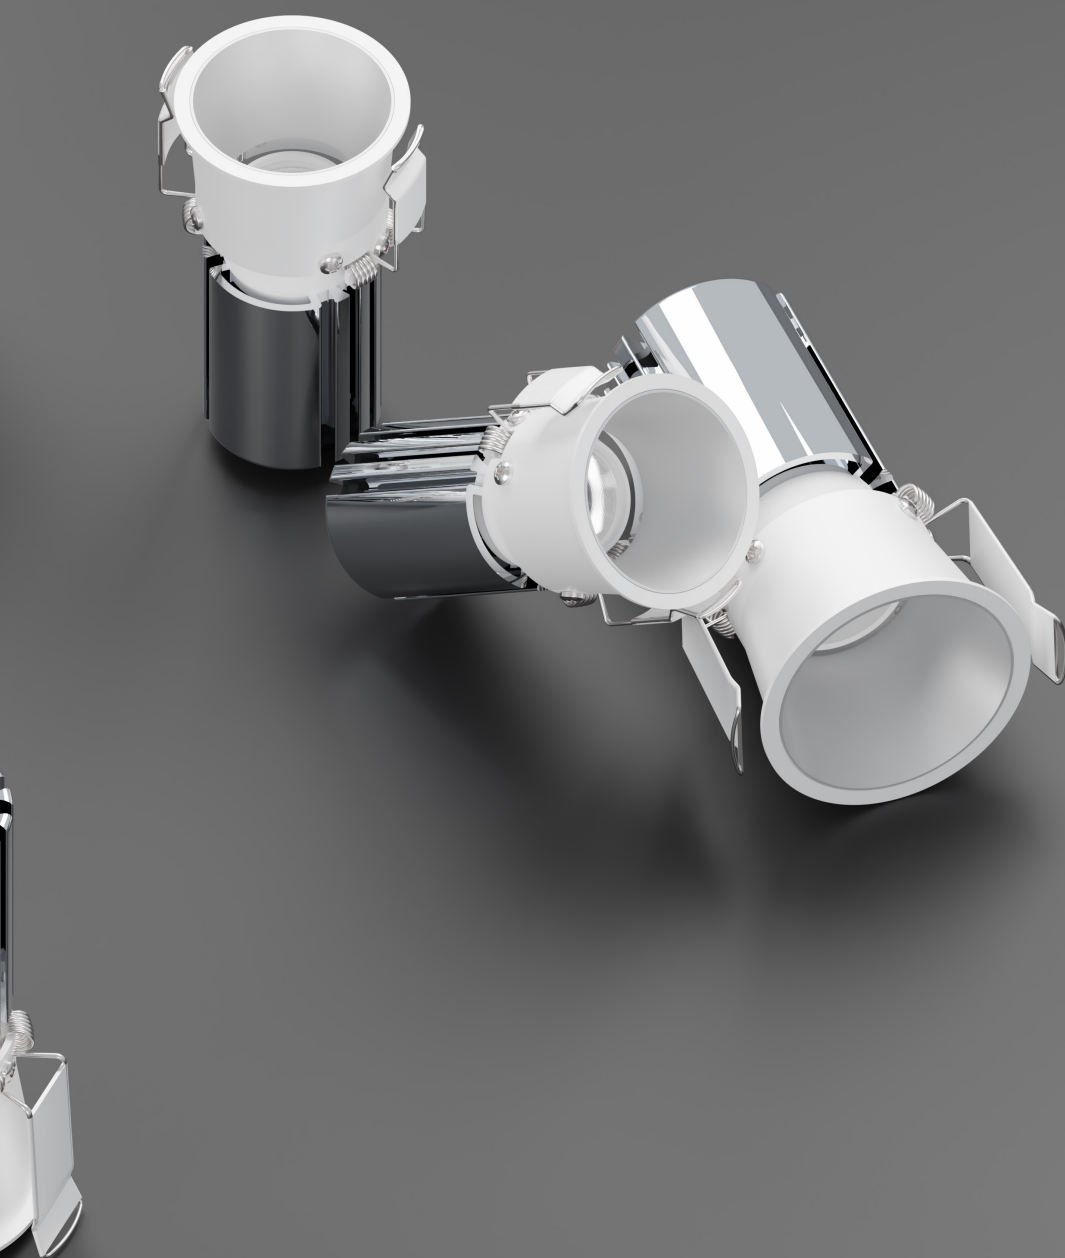

SOFT

RECESSED DOWNLIGHT

UGR $\leq$ 0


POWER: 12W

BEAM ANGLE: 4°

IP65

AVAILABLE IN THREE SIZES

FULL METAL CONSTRUCTION

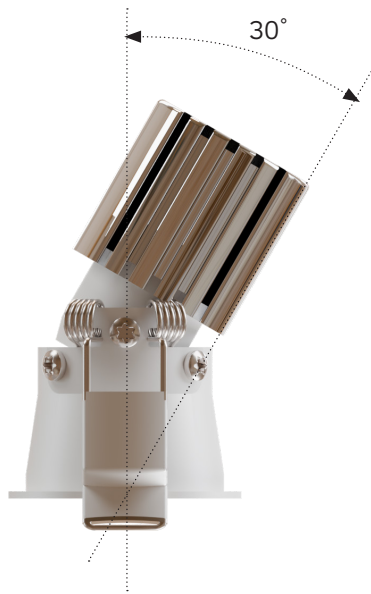

CUT OUT:35mm



CUT OUT

SOFT

RECESSED DOWNLIGHT



Φ:45mm




CUT OUT:55mm



Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot med. flood wide
flood

SOFT

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

sandy white

sandy black

BEAM ANGLE SOFT 35

spot 21°

medium 24°

flood 44°

BEAM ANGLE SOFT 45

spot 27°

medium 29°

flood 39°

wide flood 49°

BEAM ANGLE SOFT 55

narrow 4°

medium 29°

flood 39°

wide flood 55°

BEAM ANGLE SOFT 55-IP65


spot 29°

medium 32°


flood 39°

wide flood 54°

SOFT 35



35



CRI
>90

COB



IP20

DALI

≤0
UGR


ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
4W 12V 250MA	3000K	198lm	52.03523
	4000K	207lm	

SOFT 45



45



CRI
>90

COB



IP20

DALI

≤6
UGR


ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
7W 36V 180MA	3000K	693lm	52.04529
	4000K	727lm	

SOFT 55



55



CRI
>90

COB



IP20

DALI

≤4
UGR


ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
12W 36V 300MA	3000K	1147lm	52.05541
	4000K	1232lm	

SOFT 55-IP65



55



CRI
>90

COB



IP65

DALI

≤4
UGR

ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
10W 36V 250MA	3000K	974lm	52.05545
	4000K	1022lm	