

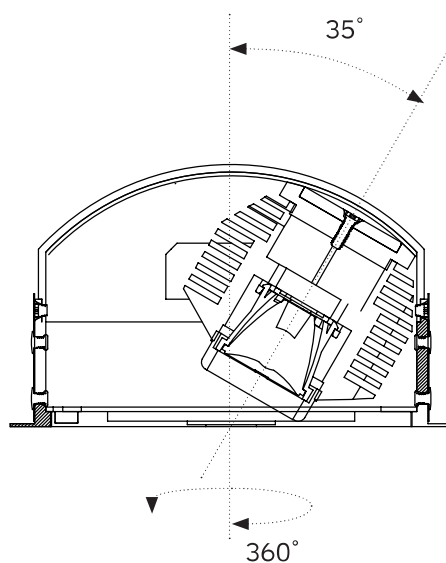

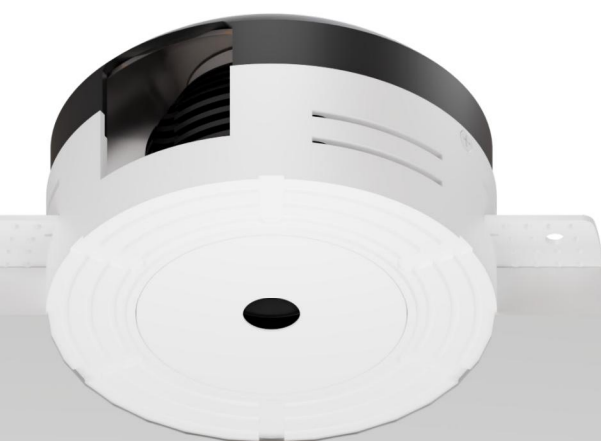
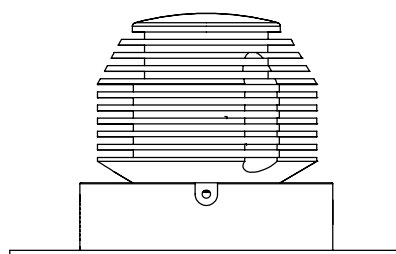


**VERO**

RECESSED DOWNLIGHT

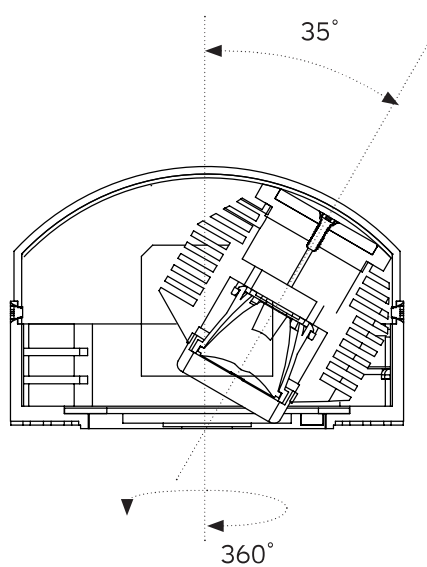

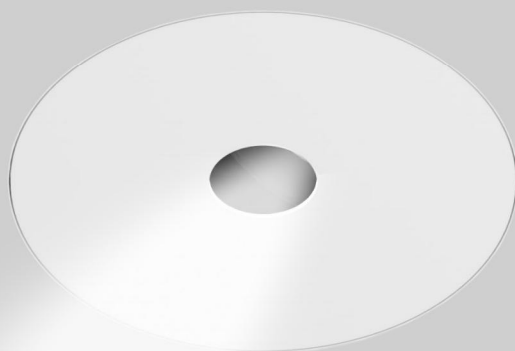

Quickinfo

2700K, 3000K, 4000K
CRI90, 3 SDCM
L85/50000h
non DIM, 0-10V DIM, DALI-2

Types



Colours



White Black

Light distributions



spot flood

VERO

RECESSED DOWNLIGHT

Order options

COLOUR TEMPERATURE

2700K

3000K

4000K

FINISH COLOUR

matte white

matte black

BEAM ANGLE VERO 108

spot 27°

flood 44°

BEAM ANGLE VERO 70

spot 27°

flood 44°

BEAM ANGLE VERO 108


spot 27°

flood 44°

BEAM ANGLE VERO 70

spot 27°

flood 44°



VERO 108


CRI >90

COB

IP20


DALI

≤10 UGR



ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	446lm	52.10811
	4000K	469lm	



VERO 70


CRI >90

COB

IP20

DALI

≤10 UGR



RECESSED DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	446lm	52.07012
	4000K	469lm	



VERO 108


CRI >90

COB

IP20

DALI

≤10 UGR



ADJUSTABLE DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	446lm	57.10811
	4000K	469lm	



VERO 70


CRI >90

COB

IP20

DALI

≤10 UGR



RECESSED DOWNLIGHT

SYSTEM POWER	COLOUR TEMP	LUMINOUS FLUX	ORDER CODE
8W 36V 180MA	3000K	446lm	57.07013
	4000K	469lm	