Report No.: Test Time: 2026-09-11 16:23

Luminaire Property


Luminaire Manufacturer:
Luminaire Description: ADJ 84 60D
Luminous Length (mm): -80
Luminous Width (mm): -80
Voltage: 226.5 V
Current: 0.075 A
Power: 16.50 W
Power Factor: 0.966

Photometric Results

CIE Class: Direct
Total Rated Lamp Lumens: 1304.0 lm
Measurement Flux: 1304 lm
Efficiency: 100%
Downward Ratio: 100%
Upward Ratio: 0%
Horizontal Diffuse Angle(50%): H59.2
Vertical Diffuse Angle(50%): V59.2
Luminaire Efficacy Rating (LER): 79.08
Central Intensity: 1336.4 cd
Max. Intensity: 1358.47 cd
Pos of Max. Intensity: H0 V11
S/MH(C0/C180): 0.96
S/MH(C90/C270): 0.96


Picture Of Luminaire


Luminous Intensity Distribution Curve

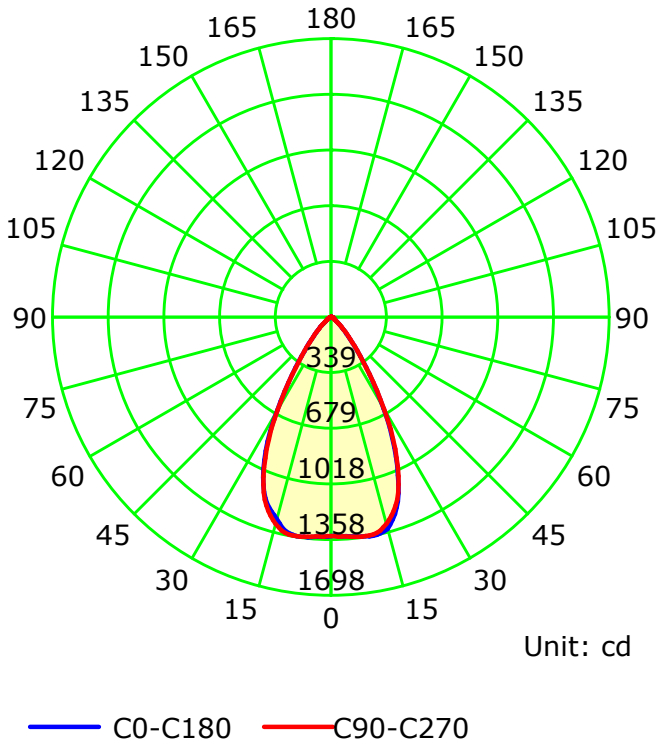

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Luminous Intensity Distribution Curve

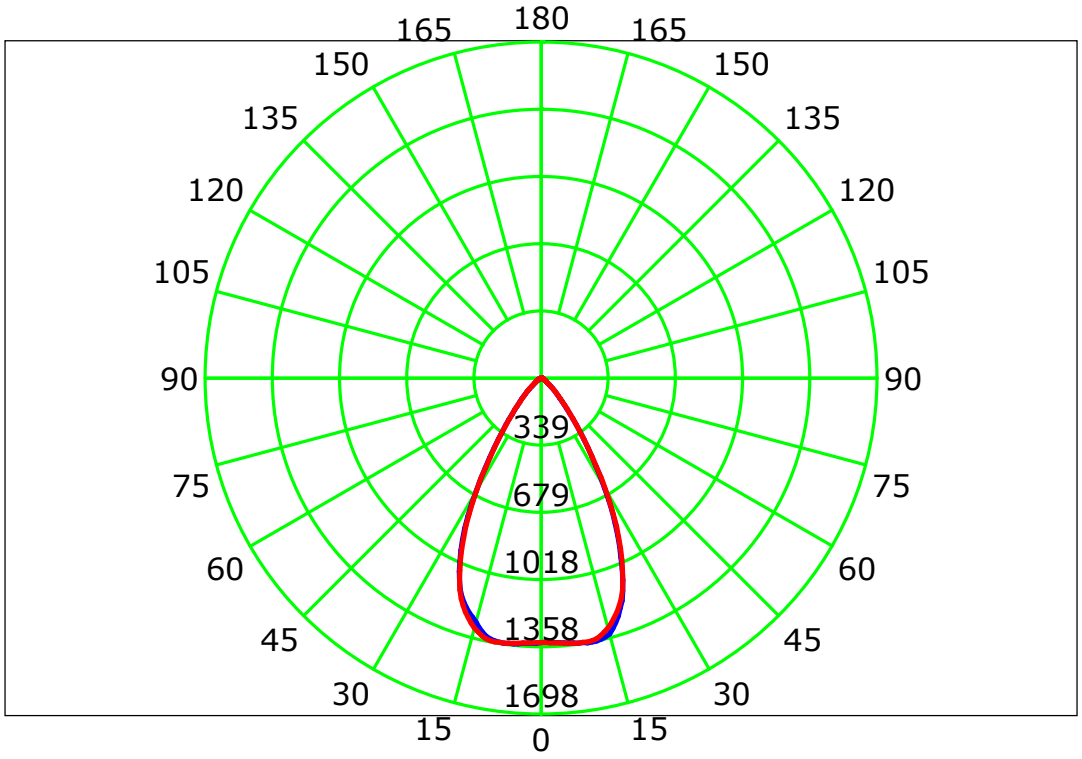


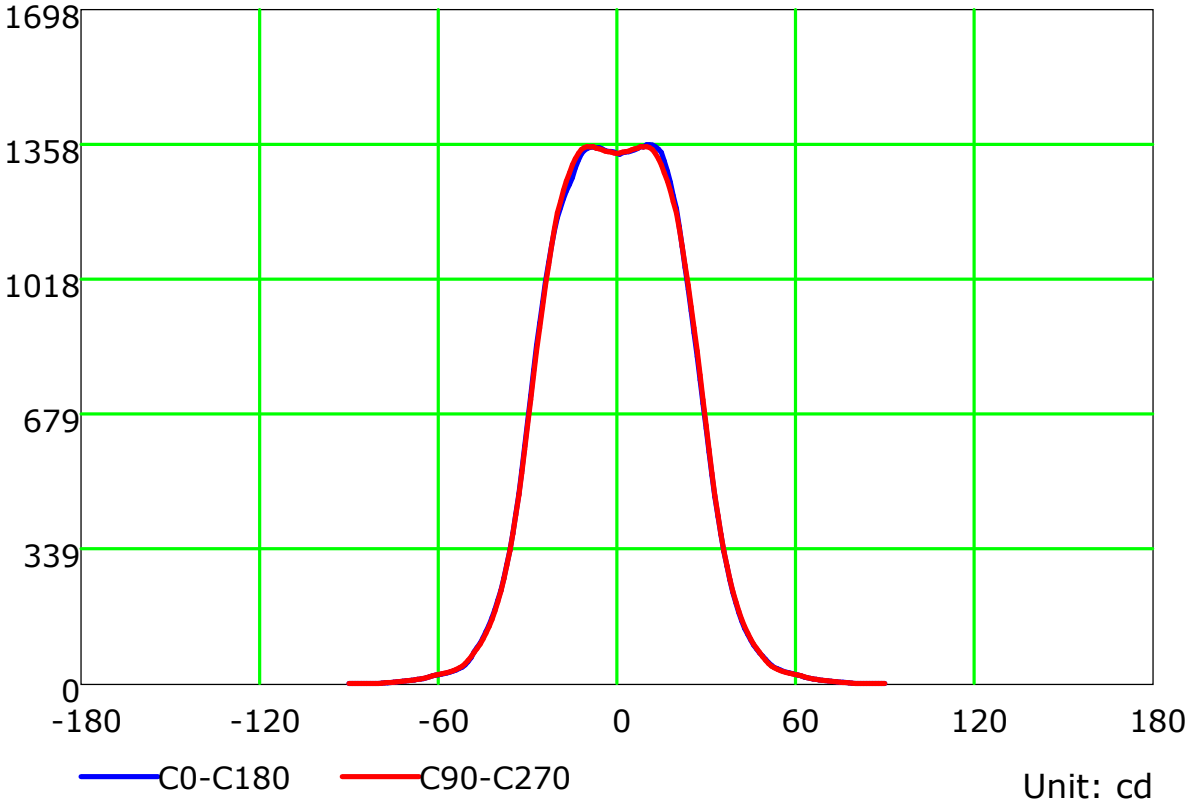

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

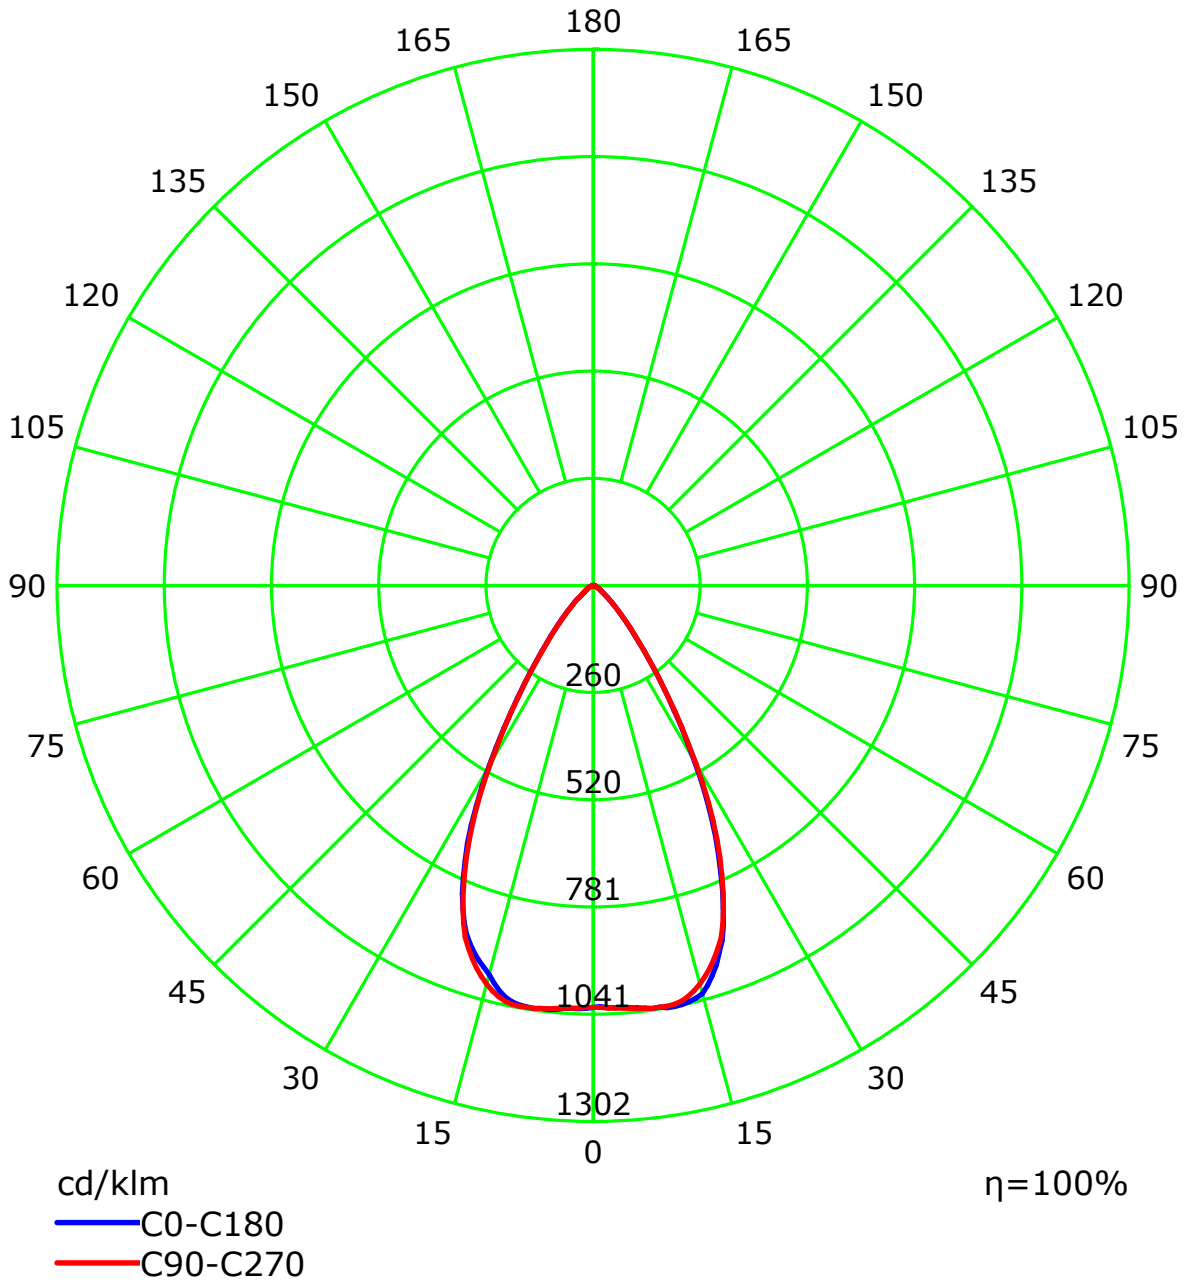

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

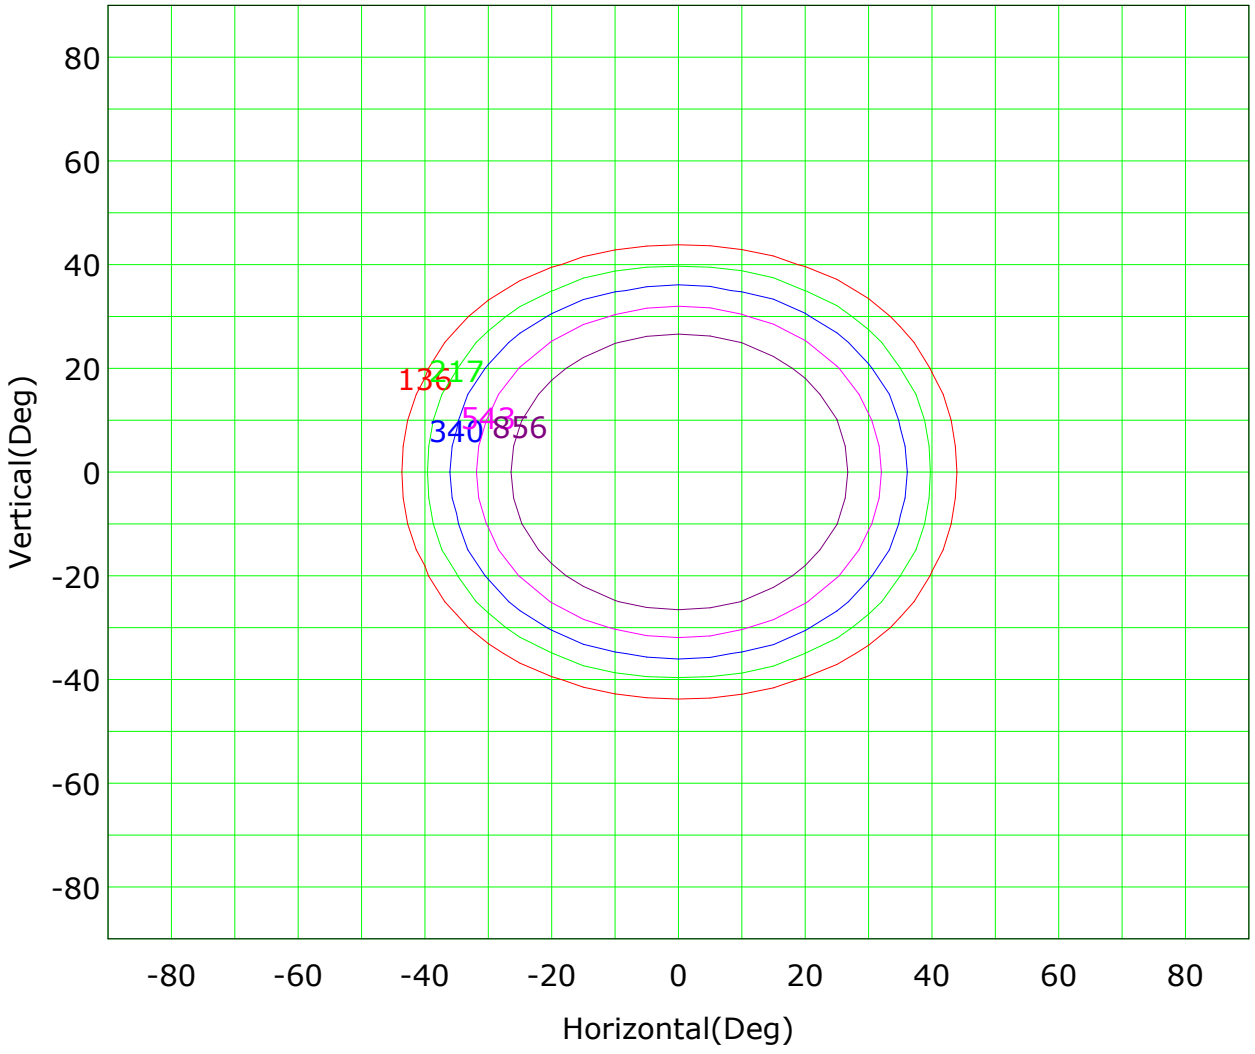


Imax (100%): 1358 cd

(10%): 136 cd
(16%): 217 cd
(25%): 340 cd
(40%): 543 cd
(63%): 856 cd
(100%): 1358 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

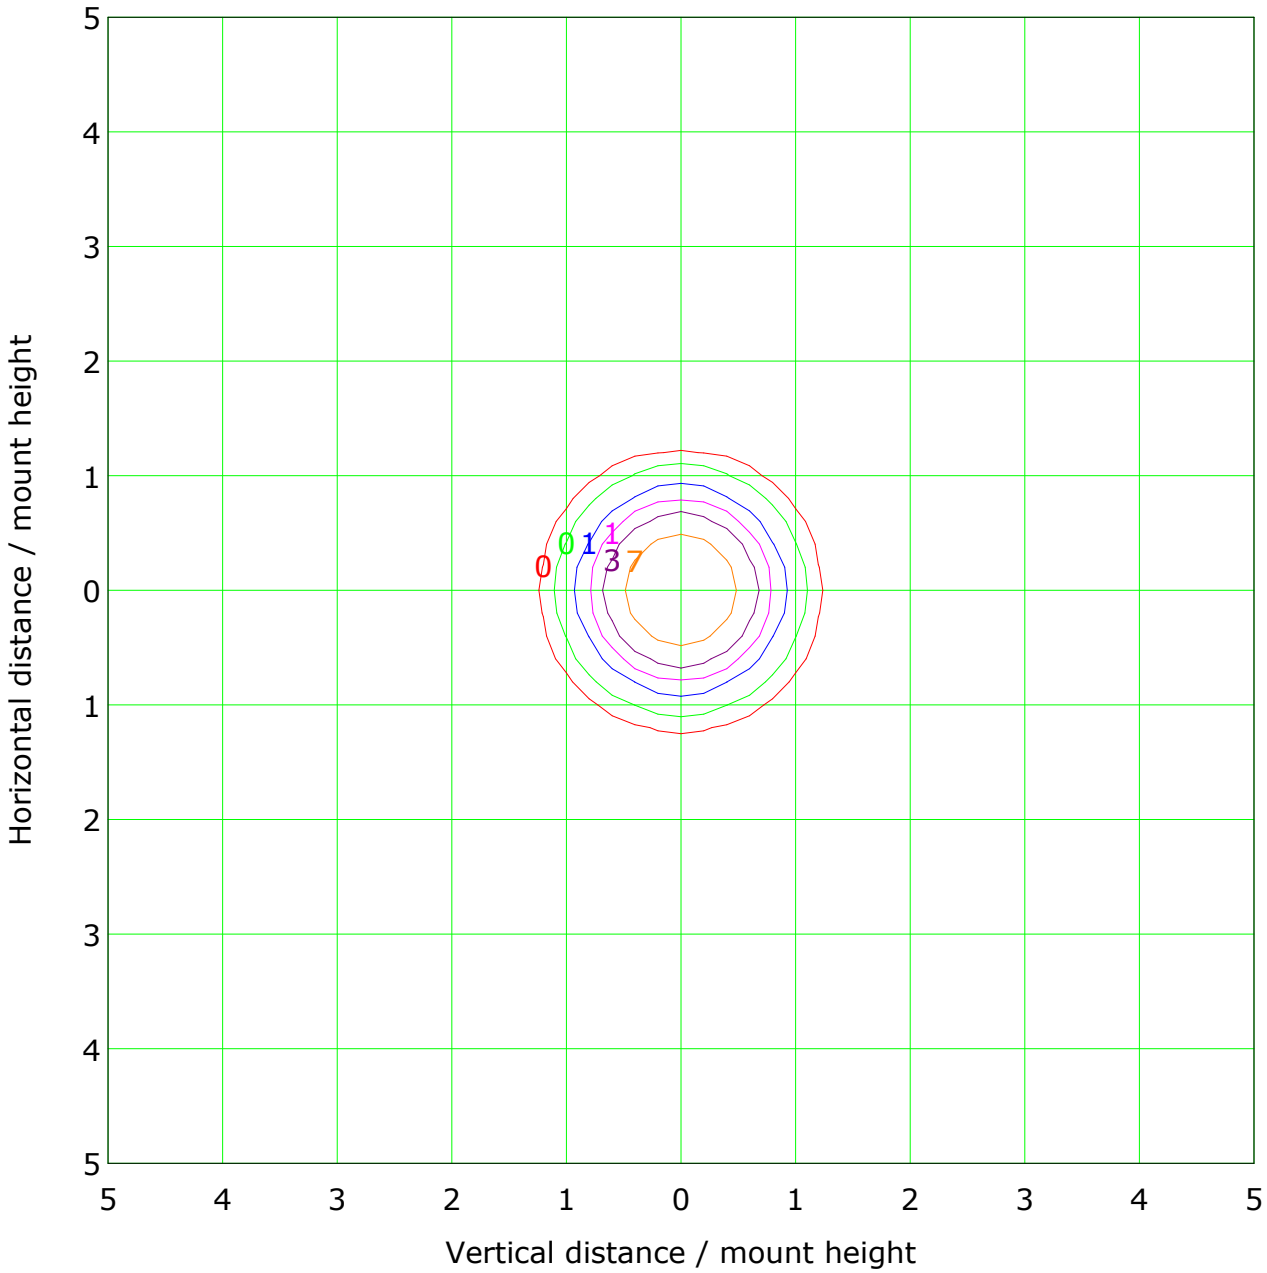


Mounting Height: 10.0m Max Lux(100%): 13.4 lx

(1%): 0.1 lx	(2%): 0.3 lx
(5%): 0.7 lx	(10%): 1.3 lx
(20%): 2.7 lx	(50%): 6.7 lx
(100%): 13.4 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Illuminance at a Distance

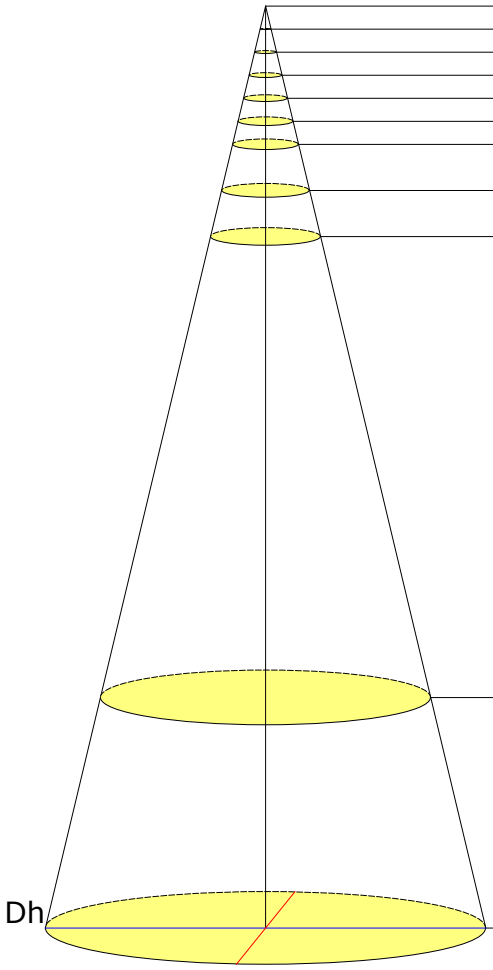


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	5345.60	0.57/0.57	0.3	2144.36
1.0	1336.40	1.13/1.14	1.0	536.09
1.5	593.96	1.70/1.70	2.3	238.26
2.0	334.10	2.27/2.27	4.0	134.02
2.5	213.82	2.84/2.84	6.3	85.77
3.0	148.49	3.40/3.41	9.1	59.57
4.0	83.53	4.54/4.55	16.2	33.51
5.0	53.46	5.67/5.68	25.3	21.44
15.0	5.94	17.01/17.04	227.8	2.38
20.0	3.34	22.69/22.73	404.9	1.34

Beam Angle(B): H59.1 V59.2 Field Angle(F): H86.9 V87.0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

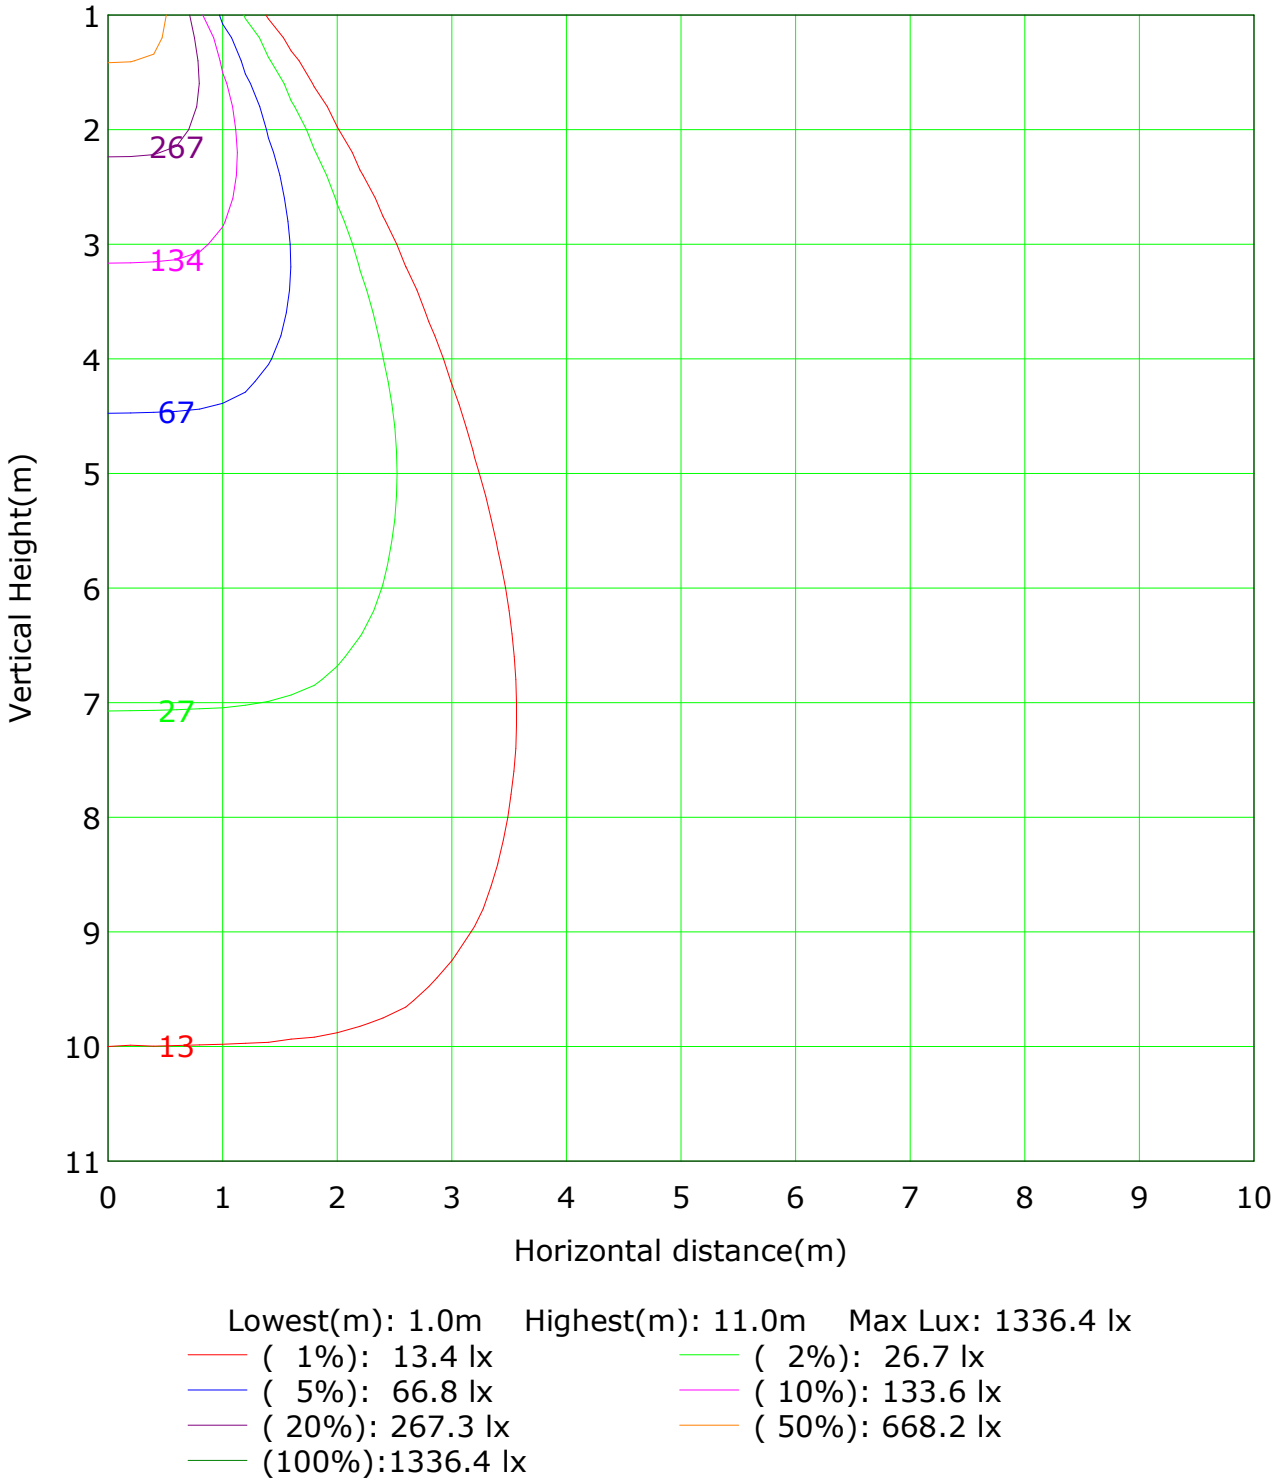

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1336.4 lx

(1%): 13.4 lx
(2%): 26.7 lx
(5%): 66.8 lx
(10%): 133.6 lx
(20%): 267.3 lx
(50%): 668.2 lx
(100%):1336.4 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																									
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	1.5	0.0
-60	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.4	0.5	0.6	0.6	0.5	0.4	0.3	0.2	0.1	0.0	0.0	4.6	0.0
-50	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.5	0.8	1.3	2.1	2.6	2.6	2.1	1.3	0.8	0.5	0.3	0.1	15.2	3.6
-40	0.0	0.0	0.1	0.2	0.5	0.9	2.1	4.3	7.2	9.6	9.6	7.2	4.3	2.1	0.9	0.5	0.2	0.1	0.0	49.6	40.9
-30	0.0	0.0	0.1	0.3	0.7	1.7	4.7	11.1	19.9	25.3	25.3	19.9	11.1	4.7	1.7	0.7	0.3	0.1	0.0	127.5	120.0
-20	0.0	0.0	0.1	0.4	0.9	2.7	8.4	21.0	32.7	37.0	37.0	32.7	21.0	8.4	2.7	0.9	0.4	0.1	0.0	206.7	199.6
-10	0.0	0.0	0.1	0.4	1.0	3.5	11.4	27.5	38.5	40.8	40.8	38.5	27.5	11.4	3.5	1.0	0.4	0.1	0.0	246.8	239.7
0	0.0	0.0	0.1	0.4	1.1	3.5	11.4	27.5	38.8	40.9	40.9	38.8	27.5	11.4	3.5	1.1	0.4	0.1	0.0	247.2	240.1
10	0.0	0.0	0.1	0.4	0.9	2.7	8.4	20.8	32.9	37.9	37.9	32.9	20.8	8.4	2.7	0.9	0.4	0.1	0.0	208.2	201.0
20	0.0	0.0	0.1	0.3	0.7	1.7	4.6	11.0	19.5	24.9	24.9	19.5	11.0	4.6	1.7	0.7	0.3	0.1	0.0	125.7	117.9
30	0.0	0.0	0.1	0.2	0.5	0.9	2.1	4.2	7.1	9.4	9.4	7.1	4.2	2.1	0.9	0.5	0.2	0.1	0.0	48.9	39.7
40	0.0	0.0	0.0	0.1	0.3	0.5	0.8	1.4	2.0	2.5	2.5	2.0	1.4	0.8	0.5	0.3	0.1	0.0	0.0	15.1	2.9
50	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.5	0.6	0.6	0.6	0.6	0.5	0.3	0.2	0.1	0.1	0.0	0.0	4.8	0.0
60	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	1.5	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1304	
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		1205
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 904.65lm

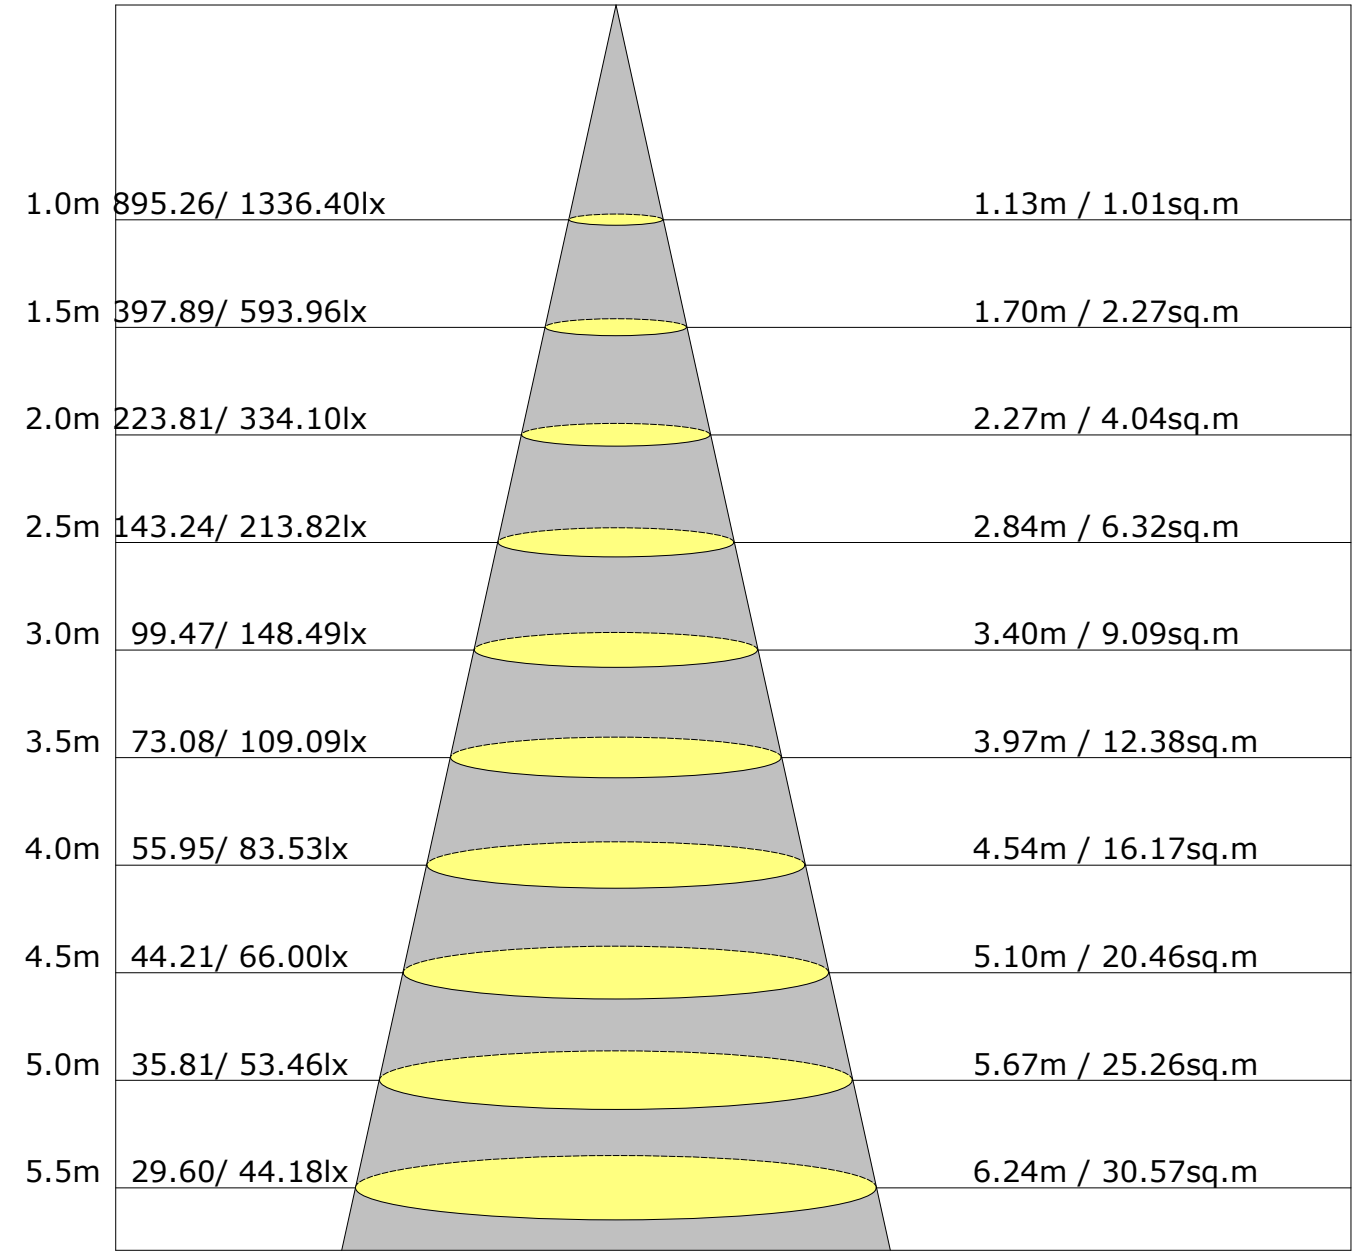

Height Avg./Nadir. E Beam Angle:59.1° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	19.8	20.7	20.0	20.9	21.1	19.8	20.7	20.1	20.9	21.1
3H	19.7	20.5	20.0	20.8	21.0	19.8	20.6	20.1	20.8	21.1
4H	19.7	20.5	20.0	20.7	21.0	19.7	20.5	20.0	20.7	21.0
6H	19.6	20.3	20.0	20.6	20.9	19.7	20.4	20.0	20.6	20.9
8H	19.6	20.3	19.9	20.6	20.9	19.6	20.3	20.0	20.6	20.9
12H	19.6	20.2	19.9	20.5	20.8	19.6	20.2	19.9	20.5	20.9
X=4H Y=2H	19.7	20.4	20.0	20.7	21.0	19.7	20.4	20.0	20.7	21.0
3H	19.7	20.3	20.0	20.6	20.9	19.7	20.3	20.0	20.6	21.0
4H	19.6	20.2	20.0	20.5	20.9	19.7	20.2	20.0	20.6	20.9
6H	19.6	20.1	20.0	20.4	20.8	19.6	20.1	20.0	20.5	20.8
8H	19.5	20.0	20.0	20.4	20.8	19.5	20.0	20.0	20.4	20.8
12H	19.5	19.9	19.9	20.3	20.7	19.5	19.9	19.9	20.3	20.8
X=8H Y=4H	19.5	20.0	20.0	20.4	20.8	19.6	20.0	20.0	20.4	20.8
6H	19.5	19.8	19.9	20.3	20.7	19.5	19.8	19.9	20.3	20.7
8H	19.4	19.7	19.9	20.2	20.7	19.4	19.8	19.9	20.2	20.7
12H	19.4	19.7	19.9	20.1	20.6	19.4	19.7	19.9	20.1	20.6
X=12H Y=4H	19.5	19.9	19.9	20.3	20.7	19.5	19.9	20.0	20.3	20.8
6H	19.4	19.7	19.9	20.2	20.7	19.4	19.8	19.9	20.2	20.7
8H	19.4	19.7	19.9	20.1	20.6	19.4	19.7	19.9	20.1	20.6
Variations with the observer position at spacings:										
S=1.0H	+3.7/-4.7					+3.7/-4.9				
S=1.5H	+6.3/-6.1					+6.3/-6.1				
S=2.0H	+8.2/-7.9					+8.2/-7.9				

Calculate in accordance with CIE Pub.117. The table is revised with 1304lm (8log(F/F0) = 0.9).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

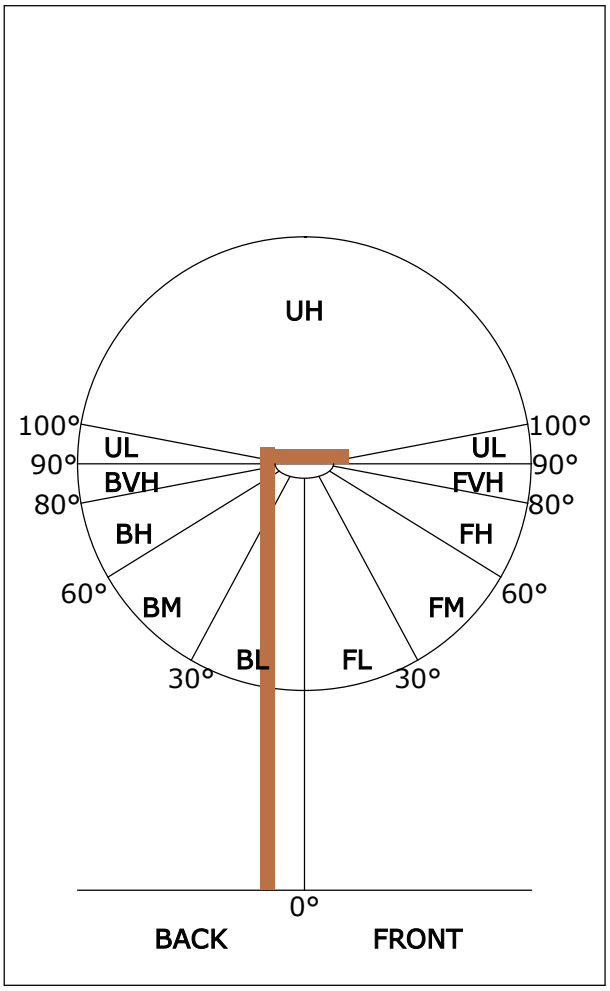

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	652	50.0
FL (0°-30°)	461	35.3
FM (30°-60°)	182	13.9
FH (60°-80°)	9	0.7
FVH (80°-90°)	0	0.0
BACK LIGHT	652	50.0
BL (0°-30°)	460	35.3
BM (30°-60°)	183	14.1
BH (60°-80°)	9	0.7
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1336.5	1.3	1.3	0.10	0.10
1.0-2.0	1338.2	3.8	5.1	0.29	0.39
2.0-3.0	1340.0	6.4	11.5	0.49	0.88
3.0-4.0	1341.1	9.0	20.5	0.69	1.57
4.0-5.0	1343.6	11.6	32.1	0.89	2.46
5.0-6.0	1346.6	14.2	46.2	1.09	3.54
6.0-7.0	1348.6	16.7	63.0	1.28	4.83
7.0-8.0	1351.1	19.3	82.3	1.48	6.31
8.0-9.0	1352.5	21.9	104.2	1.68	7.99
9.0-10.0	1352.8	24.5	128.7	1.88	9.87
10.0-11.0	1352.3	27.0	155.7	2.07	11.94
11.0-12.0	1348.5	29.5	185.2	2.26	14.20
12.0-13.0	1341.2	31.8	217.0	2.44	16.65
13.0-14.0	1329.6	34.0	251.1	2.61	19.26
14.0-15.0	1314.9	36.1	287.2	2.77	22.02
15.0-16.0	1297.1	38.0	325.2	2.92	24.94
16.0-17.0	1276.9	39.8	365.0	3.05	27.99
17.0-18.0	1254.6	41.4	406.3	3.17	31.16
18.0-19.0	1228.6	42.8	449.1	3.28	34.44
19.0-20.0	1200.2	43.9	493.0	3.37	37.81
20.0-21.0	1166.4	44.8	537.8	3.44	41.24
21.0-22.0	1124.7	45.2	583.0	3.47	44.71
22.0-23.0	1078.7	45.3	628.3	3.47	48.18
23.0-24.0	1029.2	45.0	673.3	3.45	51.63
24.0-25.0	976.8	44.4	717.7	3.41	55.04
25.0-26.0	923.2	43.6	761.3	3.34	58.38
26.0-27.0	867.3	42.4	803.7	3.25	61.64
27.0-28.0	807.9	40.9	844.6	3.14	64.77
28.0-29.0	746.8	39.1	883.7	3.00	67.77
29.0-30.0	683.4	36.9	920.6	2.83	70.60
30.0-31.0	620.7	34.5	955.2	2.65	73.25
31.0-32.0	560.5	32.1	987.3	2.46	75.71
32.0-33.0	502.6	29.6	1016.9	2.27	77.98
33.0-34.0	449.3	27.2	1044.1	2.09	80.07
34.0-35.0	400.4	24.9	1069.0	1.91	81.98
35.0-36.0	356.1	22.7	1091.6	1.74	83.72

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	316.4	20.6	1112.3	1.58	85.30
37.0-38.0	280.5	18.7	1131.0	1.44	86.73
38.0-39.0	248.3	16.9	1147.9	1.30	88.03
39.0-40.0	219.8	15.3	1163.3	1.18	89.21
40.0-41.0	194.4	13.8	1177.1	1.06	90.27
41.0-42.0	172.2	12.5	1189.6	0.96	91.23
42.0-43.0	152.8	11.3	1201.0	0.87	92.10
43.0-44.0	135.5	10.2	1211.2	0.78	92.88
44.0-45.0	120.2	9.2	1220.4	0.71	93.59
45.0-46.0	106.3	8.3	1228.7	0.64	94.23
46.0-47.0	94.2	7.5	1236.2	0.57	94.81
47.0-48.0	83.6	6.8	1243.0	0.52	95.32
48.0-49.0	73.2	6.0	1249.0	0.46	95.79
49.0-50.0	63.1	5.3	1254.3	0.40	96.19
50.0-51.0	54.4	4.6	1258.9	0.35	96.54
51.0-52.0	47.3	4.1	1262.9	0.31	96.85
52.0-53.0	41.9	3.6	1266.6	0.28	97.13
53.0-54.0	37.7	3.3	1269.9	0.26	97.39
54.0-55.0	34.4	3.1	1273.0	0.24	97.62
55.0-56.0	31.7	2.9	1275.8	0.22	97.84
56.0-57.0	29.3	2.7	1278.5	0.21	98.05
57.0-58.0	27.2	2.5	1281.0	0.19	98.24
58.0-59.0	25.4	2.4	1283.4	0.18	98.42
59.0-60.0	23.7	2.2	1285.7	0.17	98.60
60.0-61.0	22.1	2.1	1287.8	0.16	98.76
61.0-62.0	20.5	2.0	1289.7	0.15	98.91
62.0-63.0	18.3	1.8	1291.5	0.14	99.05
63.0-64.0	15.9	1.6	1293.1	0.12	99.17
64.0-65.0	13.8	1.4	1294.5	0.10	99.27
65.0-66.0	12.5	1.2	1295.7	0.10	99.37
66.0-67.0	11.3	1.1	1296.8	0.09	99.45
67.0-68.0	10.2	1.0	1297.9	0.08	99.53
68.0-69.0	9.1	0.9	1298.8	0.07	99.60
69.0-70.0	8.1	0.8	1299.6	0.06	99.67
70.0-71.0	7.2	0.7	1300.4	0.06	99.72
71.0-72.0	6.3	0.7	1301.0	0.05	99.77

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	5.6	0.6	1301.6	0.04	99.82
73.0-74.0	4.9	0.5	1302.1	0.04	99.86
74.0-75.0	4.2	0.4	1302.6	0.03	99.89
75.0-76.0	3.5	0.4	1302.9	0.03	99.92
76.0-77.0	2.8	0.3	1303.2	0.02	99.94
77.0-78.0	2.1	0.2	1303.5	0.02	99.96
78.0-79.0	1.5	0.2	1303.6	0.01	99.97
79.0-80.0	1.0	0.1	1303.7	0.01	99.98
80.0-81.0	0.6	0.1	1303.8	0.01	99.99
81.0-82.0	0.5	0.1	1303.8	0.00	99.99
82.0-83.0	0.3	0.0	1303.9	0.00	99.99
83.0-84.0	0.2	0.0	1303.9	0.00	99.99
84.0-85.0	0.2	0.0	1303.9	0.00	100.00
85.0-86.0	0.2	0.0	1303.9	0.00	100.00
86.0-87.0	0.2	0.0	1304.0	0.00	100.00
87.0-88.0	0.2	0.0	1304.0	0.00	100.00
88.0-89.0	0.1	0.0	1304.0	0.00	100.00
89.0-90.0	0.0	0.0	1304.0	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	1336.4	1336.4								
G1.0	1333.8	1339.6								
G2.0	1338.2	1341.3								
G3.0	1339.3	1341.3								
G4.0	1340.2	1343.4								
G5.0	1343.0	1347.7								
G6.0	1344.9	1351.0								
G7.0	1348.6	1350.1								
G8.0	1353.1	1352.6								
G9.0	1352.6	1351.7								
G10.0	1358.2	1348.7								
G11.0	1358.5	1343.8								
G12.0	1357.4	1334.4								
G13.0	1353.5	1319.3								
G14.0	1346.9	1298.9								
G15.0	1338.5	1275.3								
G16.0	1316.9	1257.9								
G17.0	1291.5	1241.4								
G18.0	1263.7	1221.7								
G19.0	1229.5	1199.5								
G20.0	1197.4	1174.4								
G21.0	1151.6	1142.3								
G22.0	1101.0	1104.1								
G23.0	1048.4	1061.2								
G24.0	993.5	1013.6								
G25.0	939.3	960.8								
G26.0	883.9	909.0								
G27.0	824.4	851.9								
G28.0	765.1	790.3								
G29.0	705.5	726.1								
G30.0	642.6	659.3								
G31.0	582.5	598.3								
G32.0	524.4	536.6								
G33.0	470.5	479.0								
G34.0	421.0	426.5								
G35.0	375.5	378.5								
G36.0	333.3	337.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	295.9	299.4								
G38.0	260.9	265.6								
G39.0	230.3	236.3								
G40.0	202.7	210.1								
G41.0	178.4	186.6								
G42.0	157.6	166.2								
G43.0	139.3	148.0								
G44.0	123.7	131.1								
G45.0	109.9	115.9								
G46.0	97.3	102.3								
G47.0	86.5	90.8								
G48.0	77.2	80.0								
G49.0	69.7	66.1								
G50.0	61.3	55.5								
G51.0	53.2	47.6								
G52.0	46.5	41.9								
G53.0	41.1	38.0								
G54.0	37.2	34.5								
G55.0	34.2	31.7								
G56.0	31.4	29.4								
G57.0	29.0	27.3								
G58.0	27.0	25.5								
G59.0	25.2	24.0								
G60.0	23.3	22.4								
G61.0	21.8	21.2								
G62.0	19.5	19.4								
G63.0	16.8	17.6								
G64.0	14.6	14.7								
G65.0	13.2	12.8								
G66.0	12.0	11.9								
G67.0	10.8	10.7								
G68.0	9.6	9.6								
G69.0	8.6	8.6								
G70.0	7.7	7.5								
G71.0	6.9	6.6								
G72.0	6.0	5.7								
G73.0	5.4	5.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	4.7	4.5								
G75.0	3.9	3.6								
G76.0	3.5	3.0								
G77.0	2.5	2.4								
G78.0	1.6	1.8								
G79.0	1.2	1.2								
G80.0	0.8	0.8								
G81.0	0.6	0.4								
G82.0	0.4	0.4								
G83.0	0.3	0.2								
G84.0	0.2	0.2								
G85.0	0.2	0.2								
G86.0	0.2	0.2								
G87.0	0.2	0.2								
G88.0	0.2	0.2								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: