Report No.: Test Time: 2026-10-10 10:54

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: JD-180MA-36D
Luminous Length (mm): -47
Voltage: 229.3 V
Power: 7.30 W
Lamp Description: SH1375 3000K
Luminous Width (mm): -47
Current: 0.036 A
Power Factor: 0.887


Photometric Results

CIE Class: Direct
Measurement Flux: 213.9 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H20.9
Vertical Diffuse Angle(50%): V20.9
Luminaire Efficacy Rating (LER): 29.35
Max. Intensity: 1973.66 cd
S/MH(C0/C180): 0.36
Total Rated Lamp Lumens: 213.9 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 1967.3 cd
Pos of Max. Intensity: H0 V1
S/MH(C90/C270): 0.36

Picture Of Luminaire





Luminous Intensity Distribution Curve

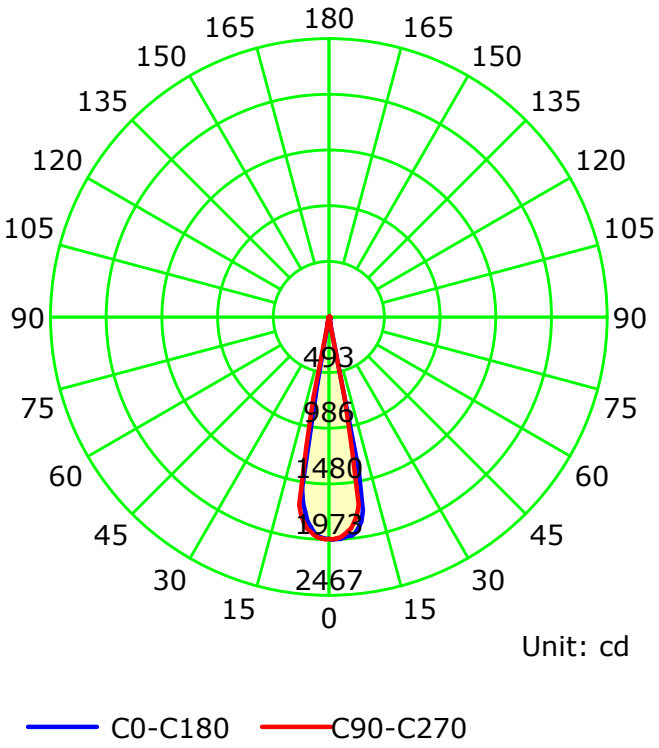

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:
Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

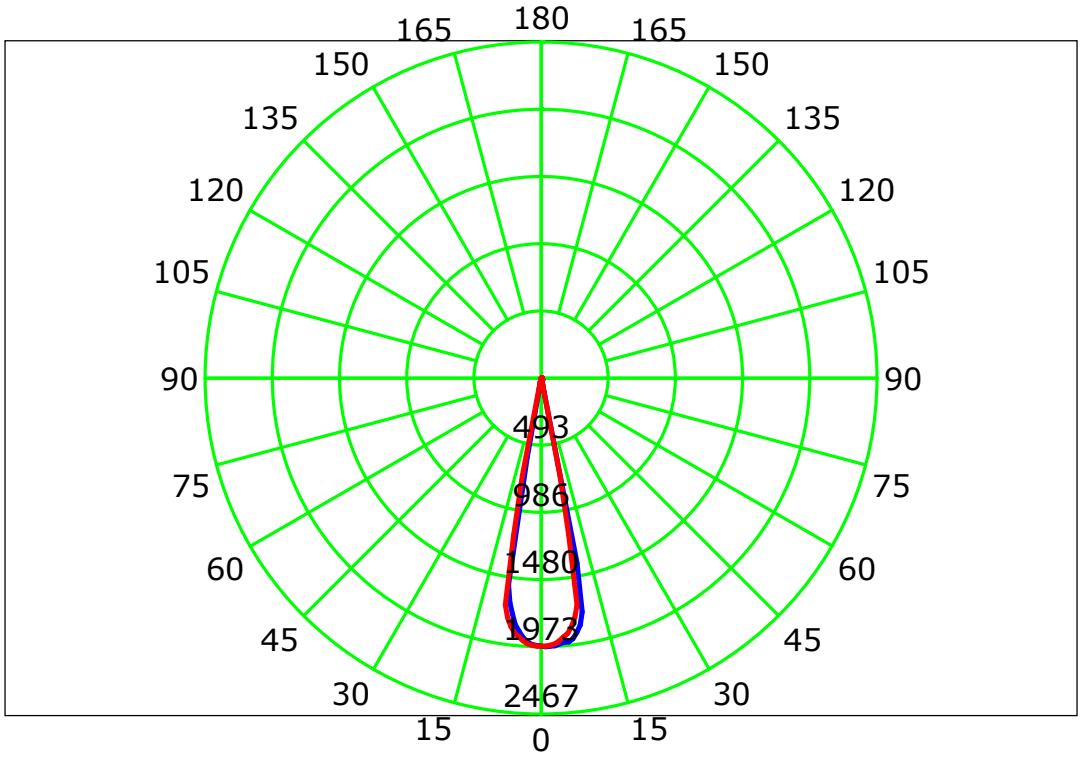


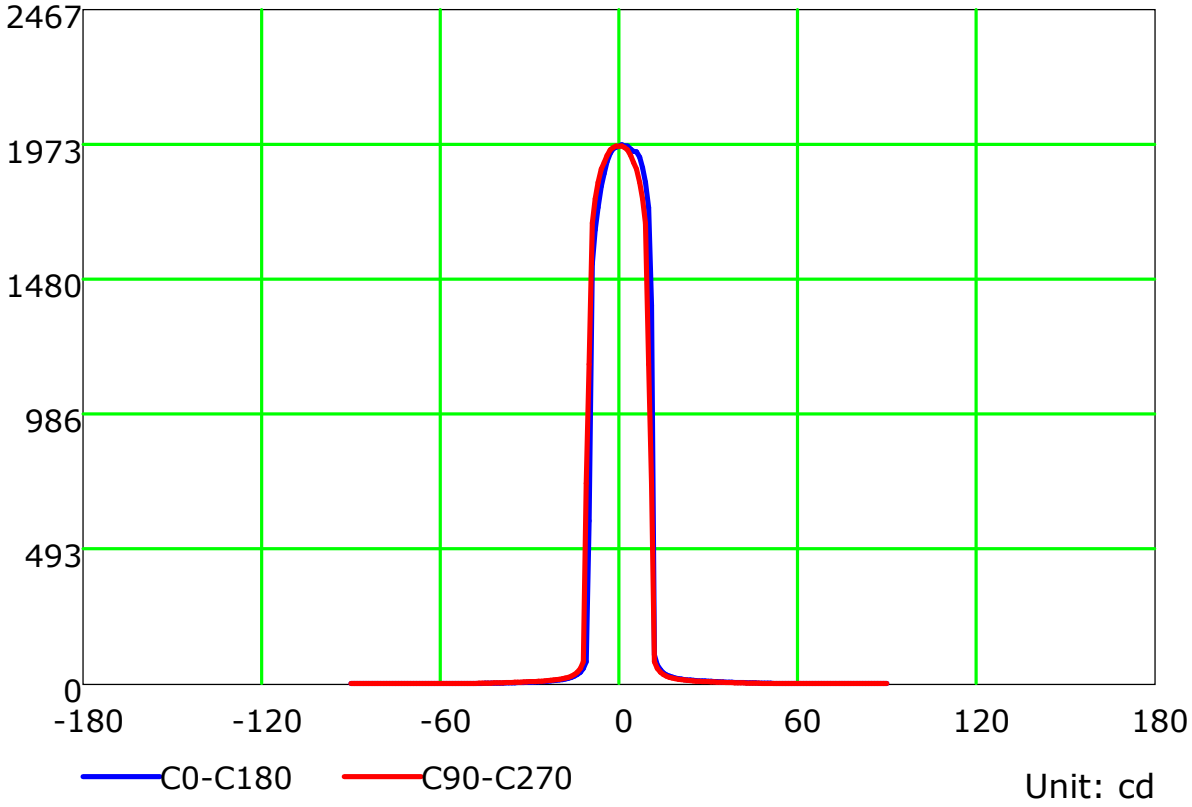

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

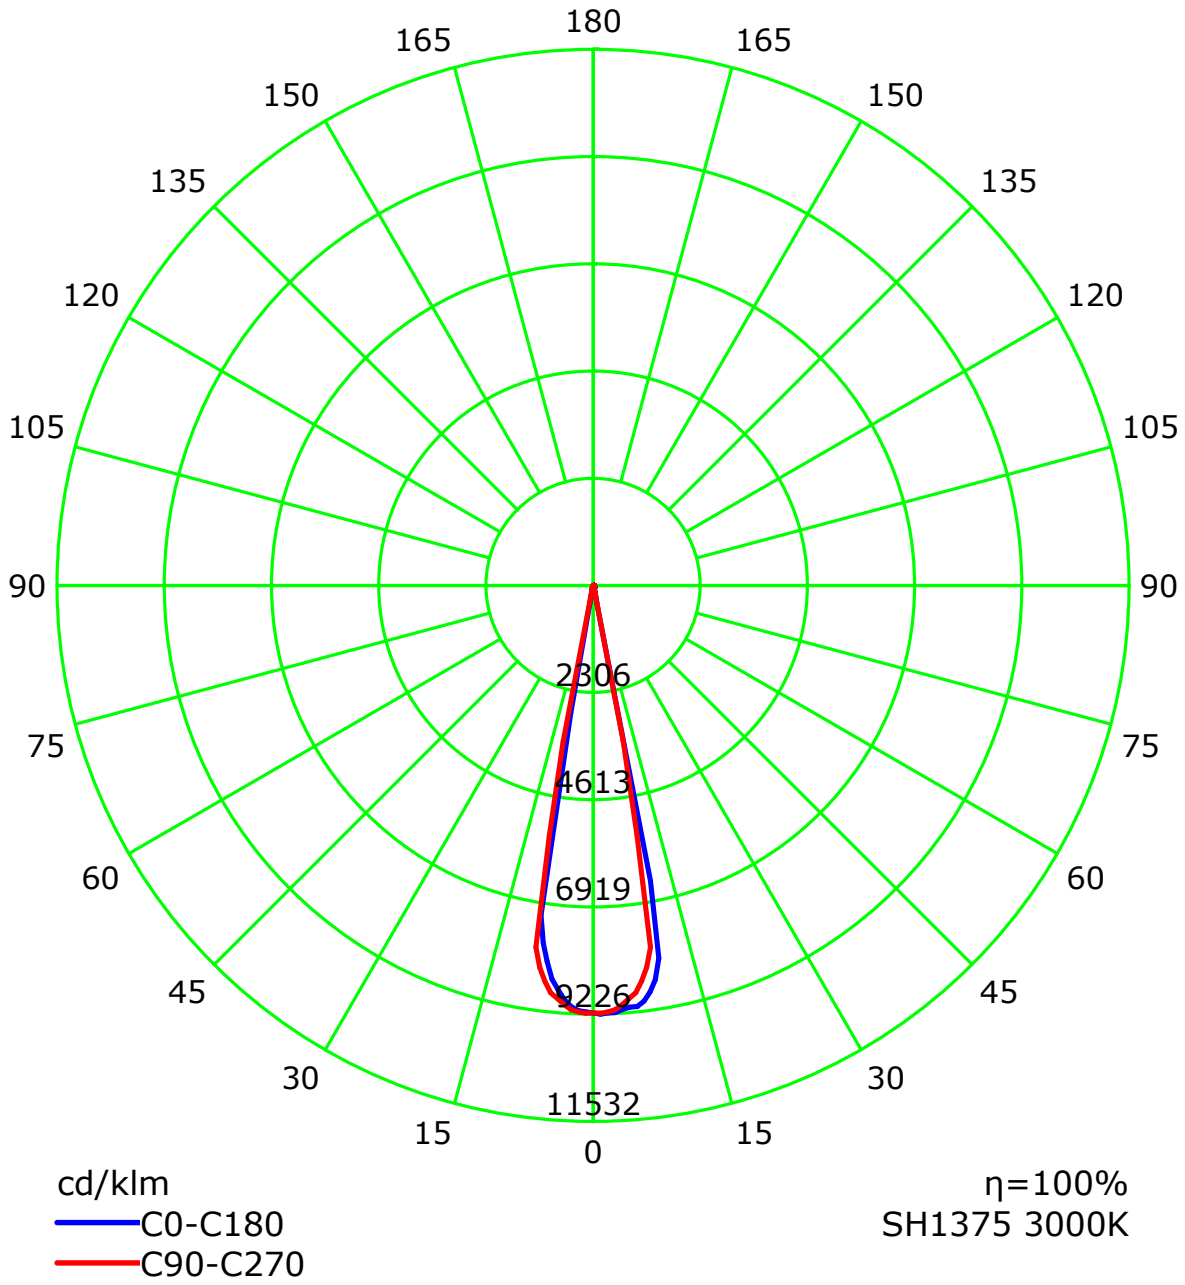

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Isocandela (rectangle)

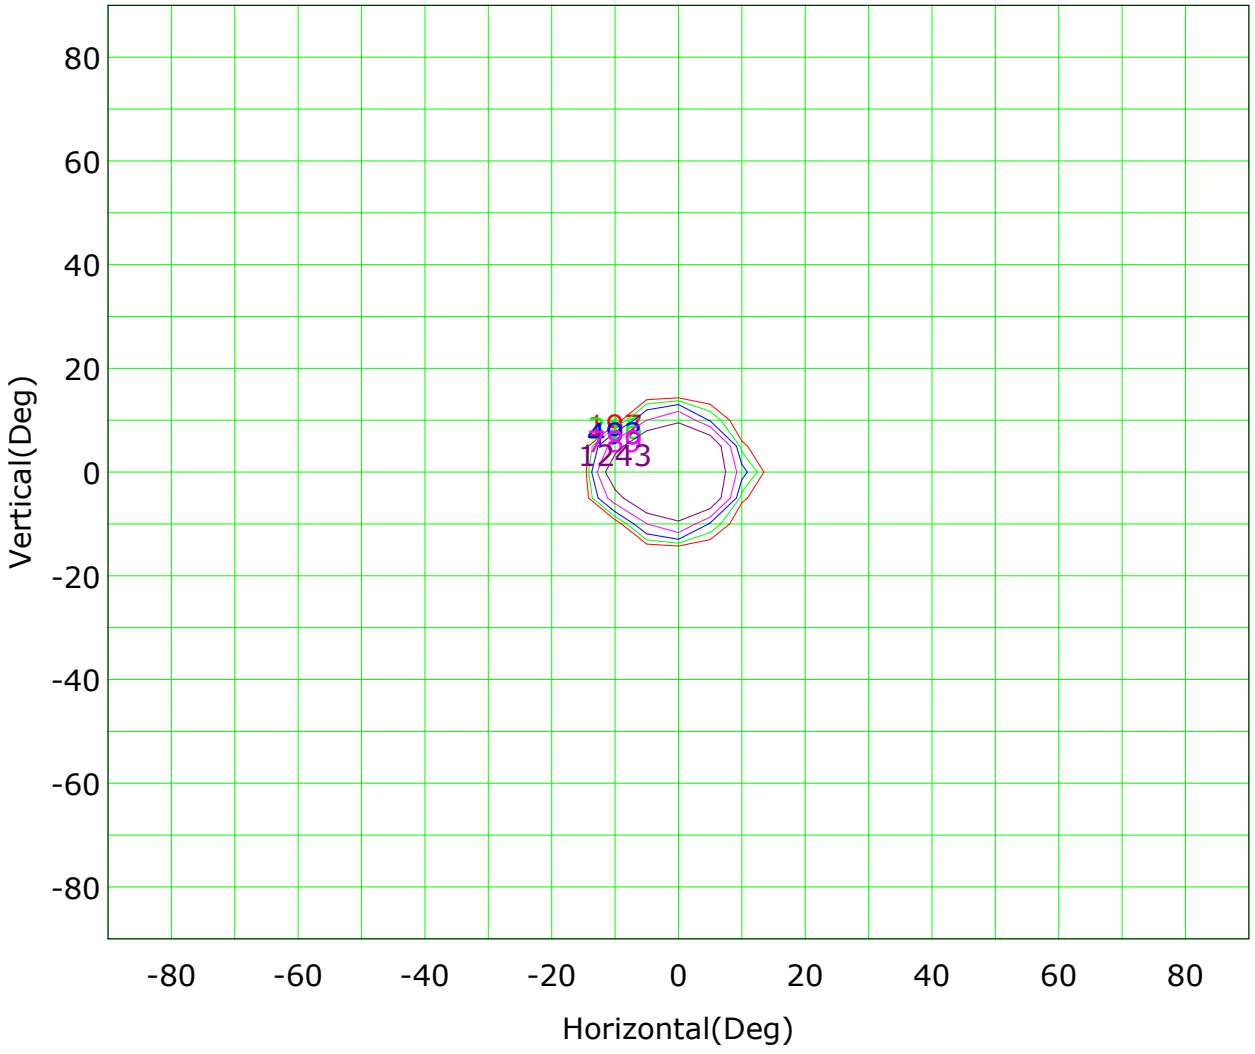


Imax (100%): 1974 cd

(10%): 197 cd
(16%): 316 cd
(25%): 493 cd
(40%): 789 cd
(63%): 1243 cd
(100%): 1974 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

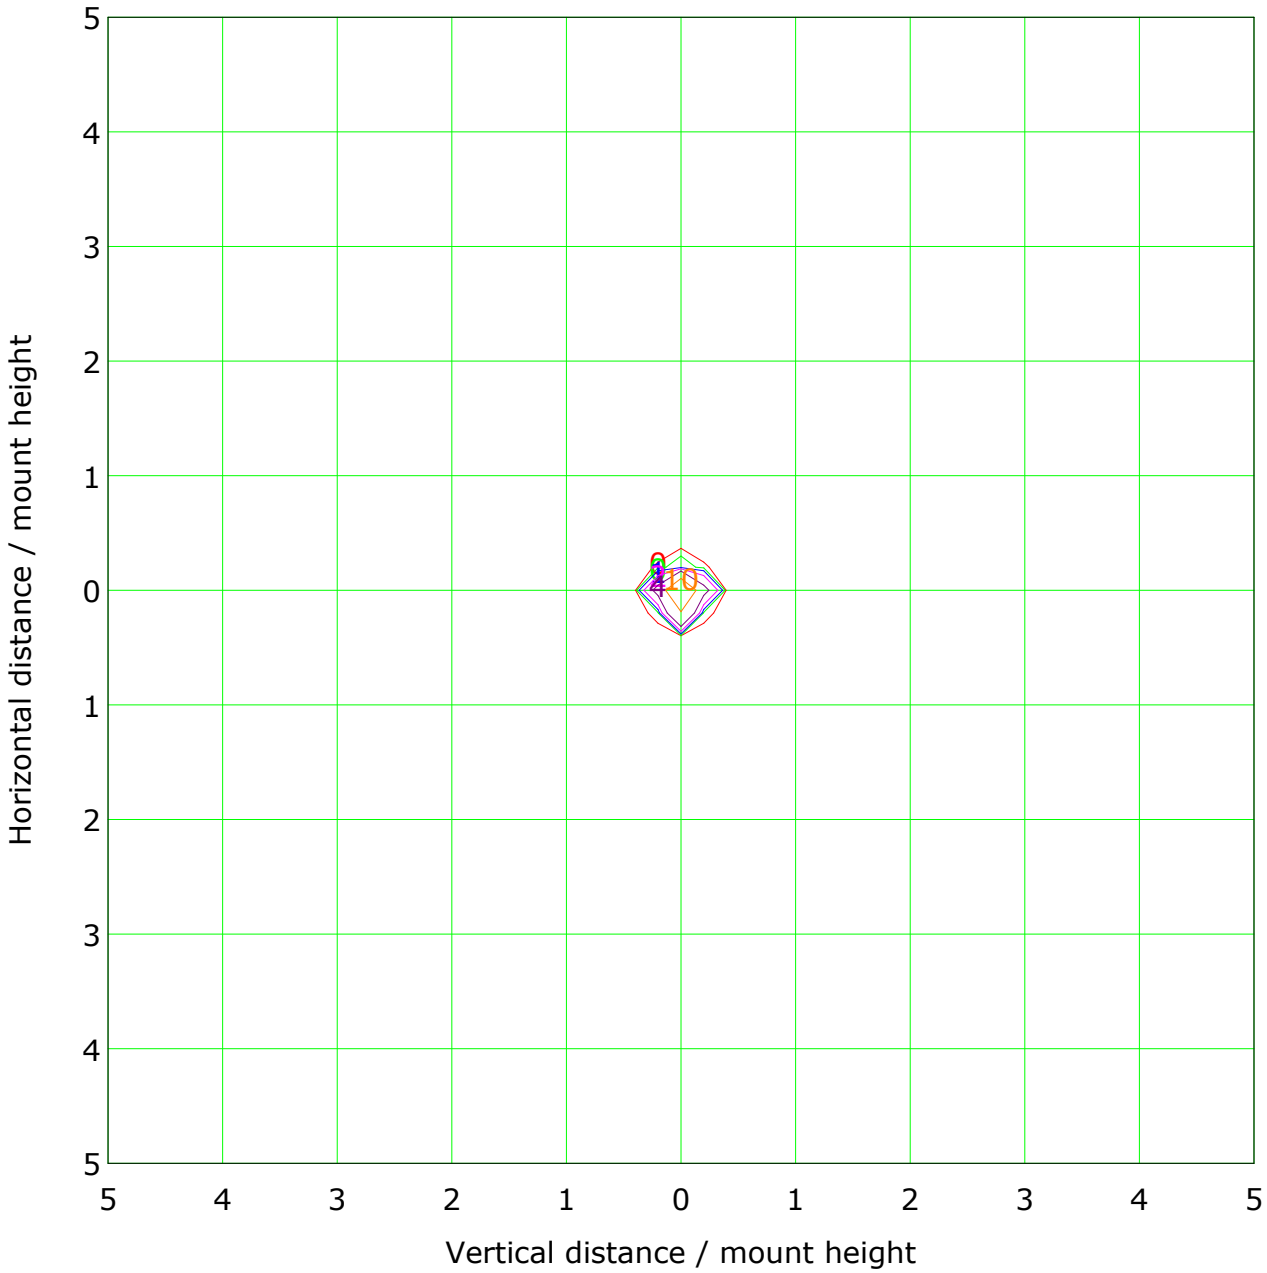


Mounting Height: 10.0m Max Lux(100%): 19.7 lx

(1%): 0.2 lx
(2%): 0.4 lx
(5%): 1.0 lx
(10%): 2.0 lx
(20%): 3.9 lx
(50%): 9.9 lx
(100%): 19.7 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

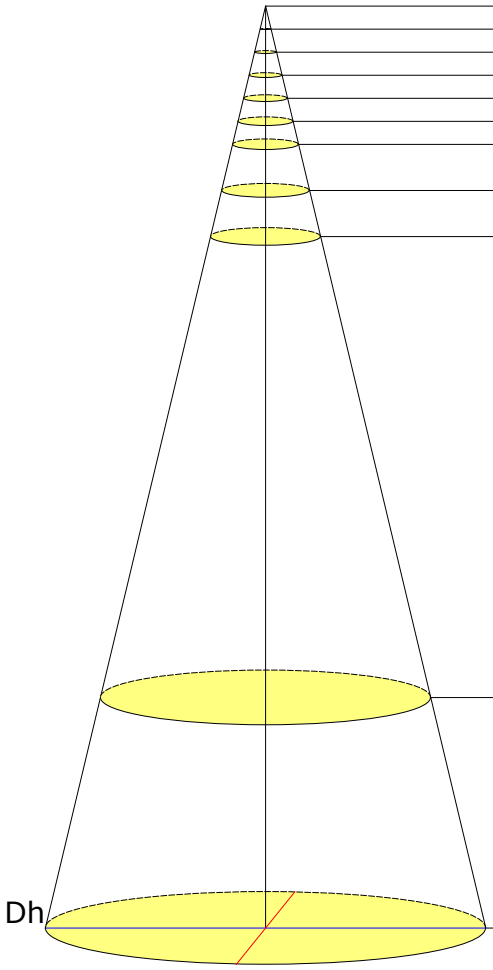


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	7869.20	0.18/0.18	0.0	3857.05
1.0	1967.30	0.37/0.37	0.1	964.26
1.5	874.36	0.55/0.55	0.2	428.56
2.0	491.83	0.74/0.74	0.4	241.07
2.5	314.77	0.92/0.92	0.7	154.28
3.0	218.59	1.11/1.10	1.0	107.14
4.0	122.96	1.48/1.47	1.7	60.27
5.0	78.69	1.84/1.84	2.7	38.57
15.0	8.74	5.53/5.52	24.1	4.29
20.0	4.92	7.38/7.36	42.8	2.41

Beam Angle(B): H20.9 V20.8 Field Angle(F): H22.7 V23.6

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Vertical IsoLux Plot

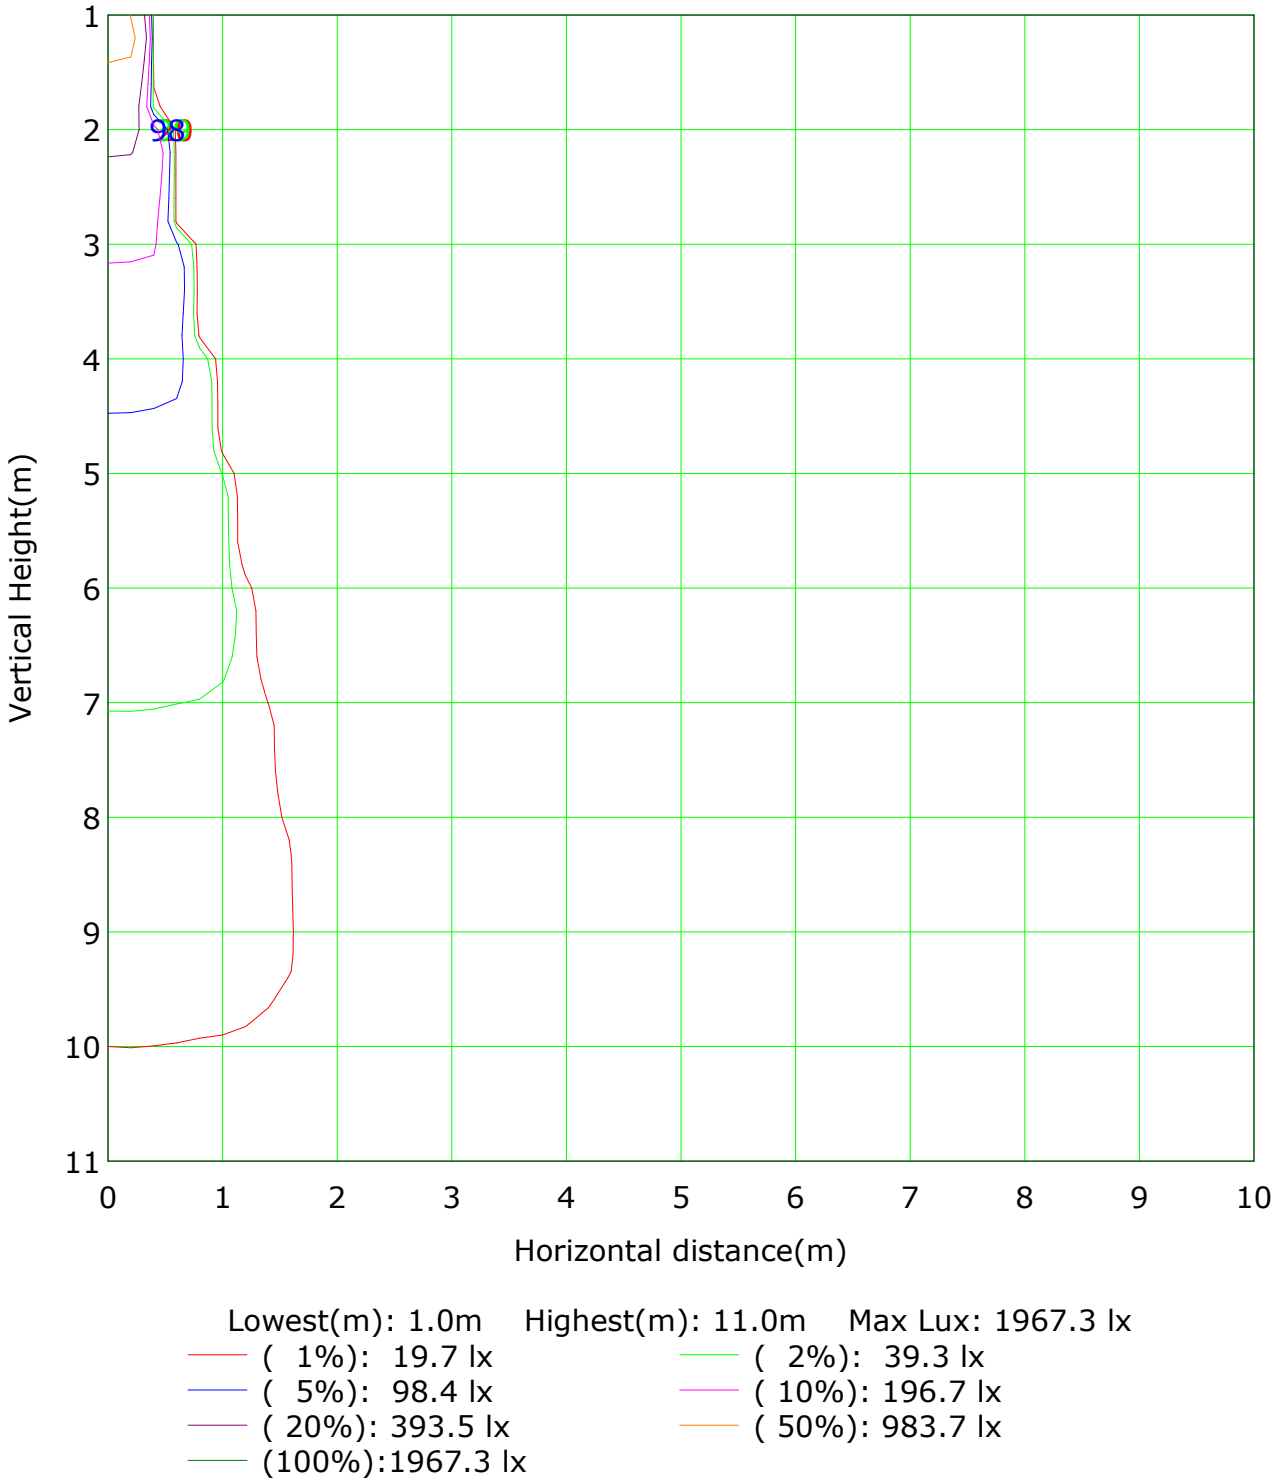

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1967.3 lx

(1%): 19.7 lx
(2%): 39.3 lx
(5%): 98.4 lx
(10%): 196.7 lx
(20%): 393.5 lx
(50%): 983.7 lx
(100%):1967.3 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table


Unit: lm

Horizontal plane	Vertical plane																							
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	1.2	0.0
-20	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	1.3	1.3	0.4	0.2	0.1	0.0	0.0	0.0	0.0	0.0	4.1	0.8
-10	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	2.3	43.2	43.2	2.3	0.3	0.1	0.0	0.0	0.0	0.0	0.0	92.0	89.0
0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.3	2.7	48.8	48.8	2.7	0.3	0.1	0.1	0.0	0.0	0.0	0.0	104.0	101.1
10	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.5	3.6	3.6	0.5	0.2	0.1	0.0	0.0	0.0	0.0	0.0	8.9	5.1
20	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.2	0.3	0.3	0.2	0.2	0.1	0.0	0.0	0.0	0.0	0.0	1.7	0.0
30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.8	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90		0.0	0.0	0.0	0.0	0.2	0.7	1.5	6.5	97.8	97.8	6.5	1.5	0.7	0.2	0.0	0.0	0.0	0.0	213	
Flux(T)	196		0.0	0.0	0.0	0.0	0.0	0.0	3.2	94.8	94.8	3.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
Flux(E)		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

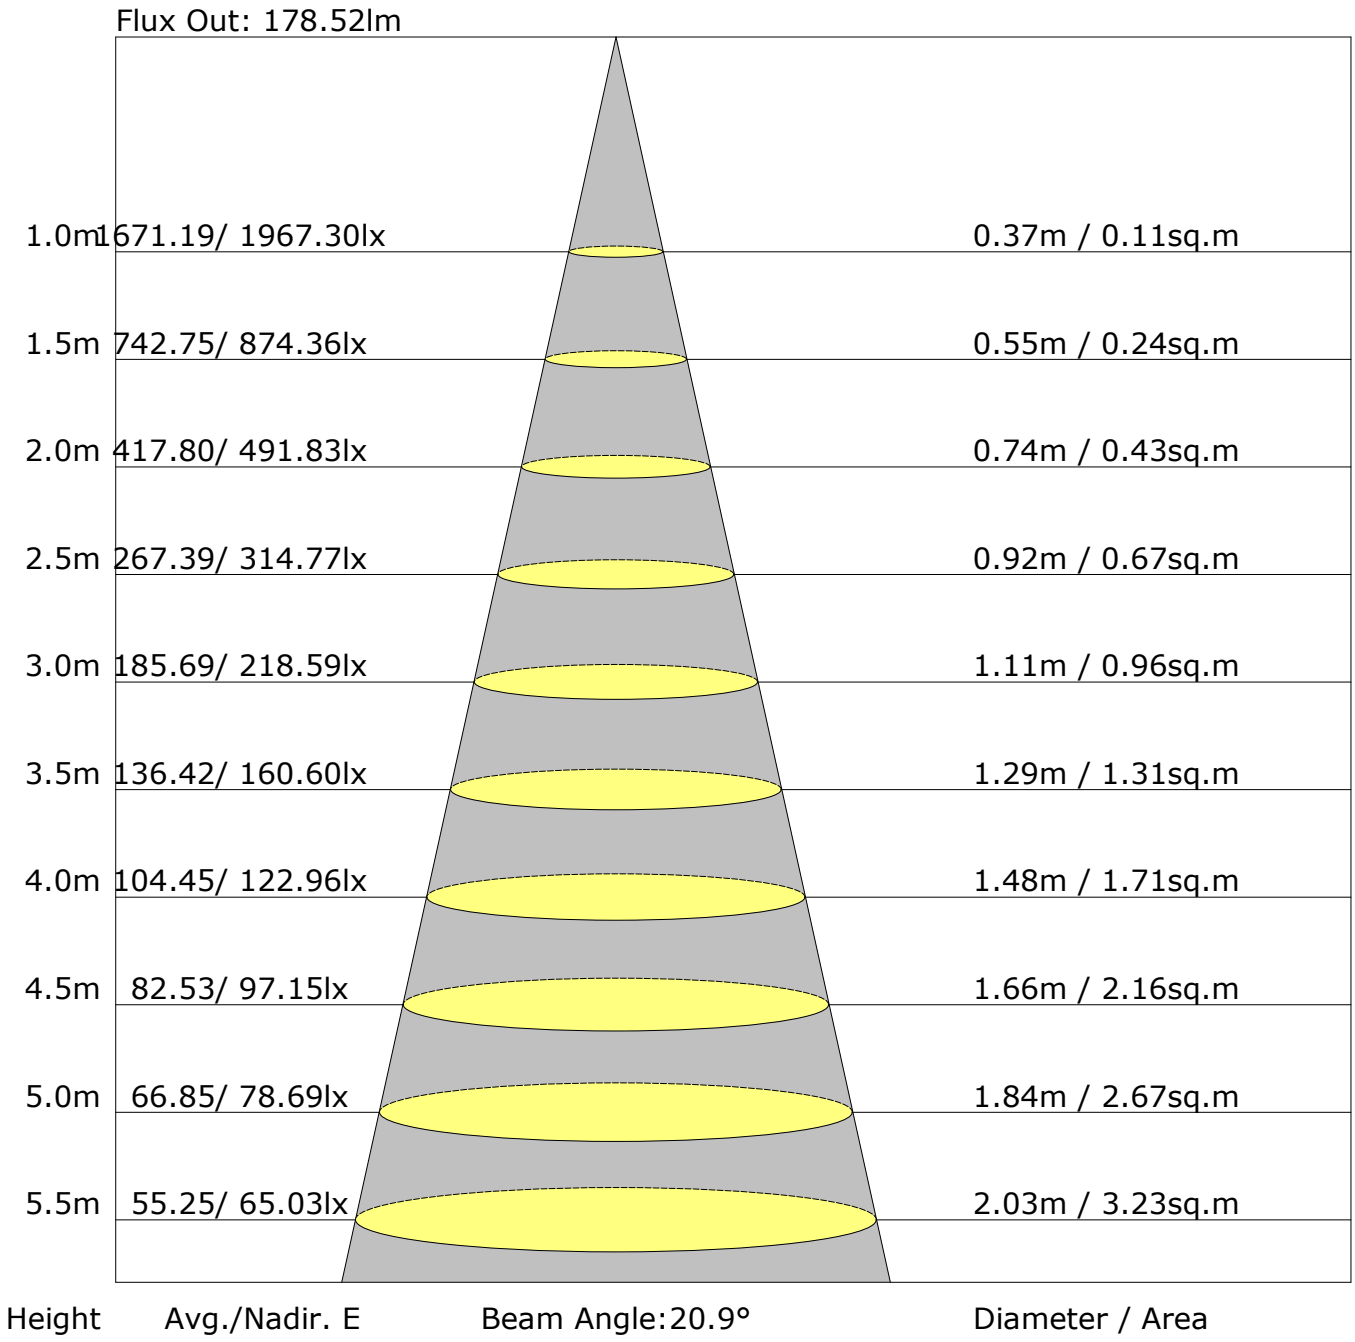

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	1.3	1.7	1.5	1.9	2.0	0.0	0.4	0.3	0.6	0.8
3H	1.1	1.5	1.4	1.7	2.0	-0.1	0.3	0.2	0.5	0.7
4H	1.1	1.4	1.3	1.7	1.9	-0.2	0.2	0.1	0.4	0.7
6H	1.0	1.3	1.3	1.6	1.9	-0.2	0.1	0.1	0.4	0.6
8H	0.9	1.3	1.3	1.6	1.9	-0.3	0.0	0.0	0.3	0.6
12H	0.9	1.2	1.2	1.5	1.8	-0.3	-0.0	0.0	0.3	0.6
X=4H Y=2H	1.1	1.4	1.4	1.7	1.9	-0.2	0.2	0.1	0.4	0.7
3H	0.9	1.2	1.2	1.5	1.8	-0.3	0.0	0.0	0.3	0.6
4H	0.8	1.1	1.2	1.4	1.8	-0.4	-0.1	-0.0	0.2	0.6
6H	0.7	1.0	1.1	1.4	1.7	-0.5	-0.2	-0.1	0.1	0.5
8H	0.7	0.9	1.1	1.3	1.7	-0.6	-0.3	-0.1	0.1	0.5
12H	0.6	0.8	1.0	1.2	1.7	-0.6	-0.4	-0.2	0.0	0.4
X=8H Y=4H	0.7	0.9	1.1	1.3	1.7	-0.6	-0.3	-0.1	0.1	0.5
6H	0.6	0.8	1.0	1.2	1.6	-0.7	-0.5	-0.2	-0.0	0.4
8H	0.5	0.7	1.0	1.1	1.6	-0.7	-0.5	-0.3	-0.1	0.4
12H	0.4	0.6	0.9	1.1	1.6	-0.8	-0.6	-0.3	-0.2	0.3
X=12H Y=4H	0.6	0.8	1.0	1.2	1.7	-0.6	-0.4	-0.2	0.0	0.4
6H	0.5	0.7	1.0	1.1	1.6	-0.7	-0.5	-0.3	-0.1	0.4
8H	0.4	0.6	0.9	1.1	1.6	-0.8	-0.6	-0.3	-0.2	0.3
Variations with the observer position at spacings:										
S=1.0H	+3.1/-15.4					+3.2/-17.3				
S=1.5H	+5.8/-1.$					+5.8/-1.$				
S=2.0H	+7.8/-1.$					+7.8/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 214lm (8log(F/F0) = -5.4).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

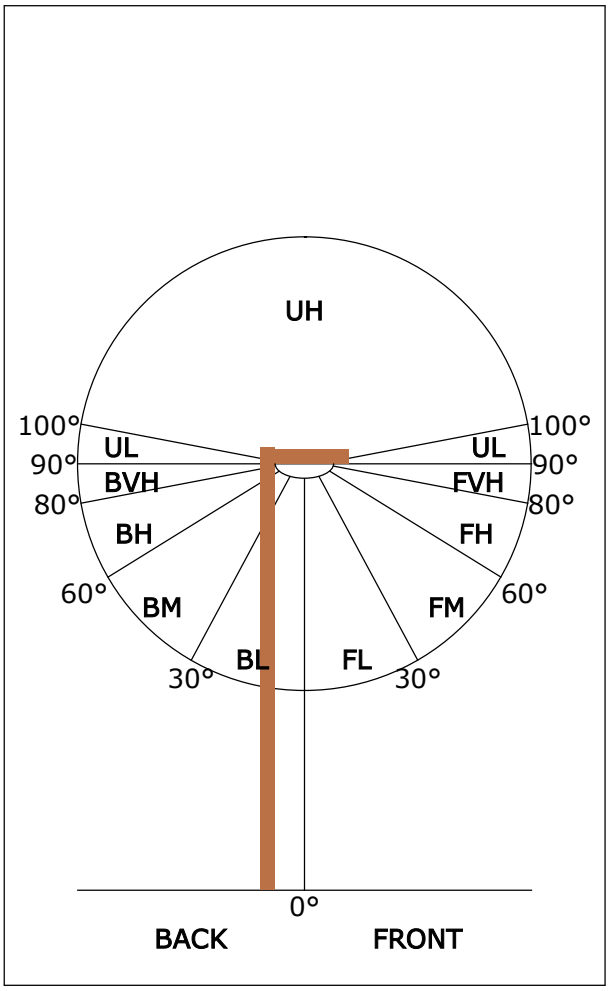

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	116	54.2
FL (0°-30°)	113	52.9
FM (30°-60°)	3	1.3
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	98	45.8
BL (0°-30°)	96	44.9
BM (30°-60°)	2	0.9
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B0 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B0 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1967.9	1.9	1.9	0.88	0.88
1.0-2.0	1965.8	5.6	7.5	2.64	3.52
2.0-3.0	1958.8	9.4	16.9	4.38	7.90
3.0-4.0	1944.1	13.0	29.9	6.08	13.98
4.0-5.0	1920.5	16.5	46.4	7.72	21.71
5.0-6.0	1896.0	19.9	66.4	9.32	31.02
6.0-7.0	1859.8	23.1	89.5	10.79	41.82
7.0-8.0	1805.0	25.8	115.3	12.08	53.89
8.0-9.0	1730.6	28.1	143.3	13.11	67.01
9.0-10.0	1427.8	25.8	169.2	12.08	79.09
10.0-11.0	951.1	19.0	188.2	8.89	87.97
11.0-12.0	406.5	8.9	197.1	4.15	92.13
12.0-13.0	67.6	1.6	198.7	0.75	92.88
13.0-14.0	48.5	1.2	199.9	0.58	93.46
14.0-15.0	37.7	1.0	201.0	0.48	93.94
15.0-16.0	30.6	0.9	201.9	0.42	94.36
16.0-17.0	25.4	0.8	202.6	0.37	94.73
17.0-18.0	21.8	0.7	203.4	0.34	95.07
18.0-19.0	19.0	0.7	204.0	0.31	95.38
19.0-20.0	16.8	0.6	204.6	0.29	95.67
20.0-21.0	15.1	0.6	205.2	0.27	95.94
21.0-22.0	13.6	0.5	205.8	0.26	96.19
22.0-23.0	12.4	0.5	206.3	0.24	96.43
23.0-24.0	11.3	0.5	206.8	0.23	96.67
24.0-25.0	10.4	0.5	207.3	0.22	96.89
25.0-26.0	9.6	0.5	207.7	0.21	97.10
26.0-27.0	8.9	0.4	208.1	0.20	97.30
27.0-28.0	8.2	0.4	208.6	0.19	97.50
28.0-29.0	7.7	0.4	209.0	0.19	97.69
29.0-30.0	7.3	0.4	209.4	0.18	97.87
30.0-31.0	6.8	0.4	209.7	0.18	98.04
31.0-32.0	6.3	0.4	210.1	0.17	98.21
32.0-33.0	5.9	0.3	210.4	0.16	98.37
33.0-34.0	5.5	0.3	210.8	0.16	98.53
34.0-35.0	5.1	0.3	211.1	0.15	98.68
35.0-36.0	4.7	0.3	211.4	0.14	98.82

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	4.3	0.3	211.7	0.13	98.95
37.0-38.0	4.0	0.3	211.9	0.12	99.07
38.0-39.0	3.6	0.2	212.2	0.11	99.19
39.0-40.0	3.2	0.2	212.4	0.10	99.29
40.0-41.0	2.8	0.2	212.6	0.09	99.39
41.0-42.0	2.6	0.2	212.8	0.09	99.47
42.0-43.0	2.4	0.2	213.0	0.08	99.56
43.0-44.0	2.1	0.2	213.1	0.07	99.63
44.0-45.0	1.9	0.1	213.3	0.07	99.70
45.0-46.0	1.8	0.1	213.4	0.06	99.77
46.0-47.0	1.4	0.1	213.5	0.05	99.82
47.0-48.0	1.0	0.1	213.6	0.04	99.86
48.0-49.0	0.9	0.1	213.7	0.03	99.89
49.0-50.0	0.7	0.1	213.7	0.03	99.92
50.0-51.0	0.6	0.1	213.8	0.02	99.94
51.0-52.0	0.5	0.0	213.8	0.02	99.96
52.0-53.0	0.3	0.0	213.9	0.01	99.98
53.0-54.0	0.3	0.0	213.9	0.01	99.99
54.0-55.0	0.2	0.0	213.9	0.01	100.00
55.0-56.0	0.0	0.0	213.9	0.00	100.00
56.0-57.0	0.0	0.0	213.9	0.00	100.00
57.0-58.0	0.0	0.0	213.9	0.00	100.00
58.0-59.0	0.0	0.0	213.9	0.00	100.00
59.0-60.0	0.0	0.0	213.9	0.00	100.00
60.0-61.0	0.0	0.0	213.9	0.00	100.00
61.0-62.0	0.0	0.0	213.9	0.00	100.00
62.0-63.0	0.0	0.0	213.9	0.00	100.00
63.0-64.0	0.0	0.0	213.9	0.00	100.00
64.0-65.0	0.0	0.0	213.9	0.00	100.00
65.0-66.0	0.0	0.0	213.9	0.00	100.00
66.0-67.0	0.0	0.0	213.9	0.00	100.00
67.0-68.0	0.0	0.0	213.9	0.00	100.00
68.0-69.0	0.0	0.0	213.9	0.00	100.00
69.0-70.0	0.0	0.0	213.9	0.00	100.00
70.0-71.0	0.0	0.0	213.9	0.00	100.00
71.0-72.0	0.0	0.0	213.9	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	213.9	0.00	100.00
73.0-74.0	0.0	0.0	213.9	0.00	100.00
74.0-75.0	0.0	0.0	213.9	0.00	100.00
75.0-76.0	0.0	0.0	213.9	0.00	100.00
76.0-77.0	0.0	0.0	213.9	0.00	100.00
77.0-78.0	0.0	0.0	213.9	0.00	100.00
78.0-79.0	0.0	0.0	213.9	0.00	100.00
79.0-80.0	0.0	0.0	213.9	0.00	100.00
80.0-81.0	0.0	0.0	213.9	0.00	100.00
81.0-82.0	0.0	0.0	213.9	0.00	100.00
82.0-83.0	0.0	0.0	213.9	0.00	100.00
83.0-84.0	0.0	0.0	213.9	0.00	100.00
84.0-85.0	0.0	0.0	213.9	0.00	100.00
85.0-86.0	0.0	0.0	213.9	0.00	100.00
86.0-87.0	0.0	0.0	213.9	0.00	100.00
87.0-88.0	0.0	0.0	213.9	0.00	100.00
88.0-89.0	0.0	0.0	213.9	0.00	100.00
89.0-90.0	0.0	0.0	213.9	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	1967.3	1967.3								
G1.0	1973.7	1963.2								
G2.0	1968.5	1957.7								
G3.0	1968.0	1941.1								
G4.0	1956.3	1910.8								
G5.0	1947.9	1867.1								
G6.0	1947.7	1821.3								
G7.0	1927.3	1743.0								
G8.0	1888.2	1661.5								
G9.0	1835.8	1536.7								
G10.0	1742.3	596.3								
G11.0	1385.2	80.7								
G12.0	104.5	55.6								
G13.0	68.8	41.5								
G14.0	50.6	33.0								
G15.0	39.8	27.5								
G16.0	32.4	22.6								
G17.0	27.3	19.4								
G18.0	23.5	17.2								
G19.0	20.6	14.9								
G20.0	18.5	13.2								
G21.0	16.8	11.8								
G22.0	15.1	10.8								
G23.0	13.9	9.6								
G24.0	13.0	8.6								
G25.0	12.2	7.9								
G26.0	11.1	7.2								
G27.0	10.3	6.9								
G28.0	9.8	6.0								
G29.0	9.4	5.5								
G30.0	8.8	5.3								
G31.0	8.2	4.8								
G32.0	7.6	4.5								
G33.0	7.4	4.1								
G34.0	6.9	3.6								
G35.0	6.5	3.4								
G36.0	5.8	3.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	5.5	2.8								
G38.0	5.2	2.6								
G39.0	4.5	2.2								
G40.0	4.1	2.1								
G41.0	3.6	1.5								
G42.0	3.8	1.4								
G43.0	3.1	1.4								
G44.0	2.8	1.2								
G45.0	2.6	1.2								
G46.0	2.4	0.9								
G47.0	1.9	0.5								
G48.0	1.5	0.2								
G49.0	1.4	0.3								
G50.0	1.2	0.0								
G51.0	1.2	0.0								
G52.0	0.9	0.0								
G53.0	0.5	0.0								
G54.0	0.7	0.0								
G55.0	0.2	0.0								
G56.0	0.0	0.0								
G57.0	0.0	0.0								
G58.0	0.0	0.0								
G59.0	0.0	0.0								
G60.0	0.0	0.0								
G61.0	0.0	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector: