中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.:

Test Time: 2026-10-10 10:57

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: JD-180MA-36D
Luminous Length (mm): -47
Voltage: 230.7 V
Power: 7.30 W

Lamp Description: SH1375 3000K
Luminous Width (mm): -47
Current: 0.035 A
Power Factor: 0.883

Photometric Results


CIE Class: Direct
Measurement Flux: 266.7 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H31
Vertical Diffuse Angle(50%): V31
Luminaire Efficacy Rating (LER): 36.58
Max. Intensity: 1174.66 cd
S/MH(C0/C180): 0.55

Total Rated Lamp Lumens: 266.7 lm
Efficiency: 100%
Upward Ratio: 0%

Central Intensity: 1139.64 cd
Pos of Max. Intensity: H180 V12
S/MH(C90/C270): 0.55

Picture Of Luminaire


Luminous Intensity Distribution Curve

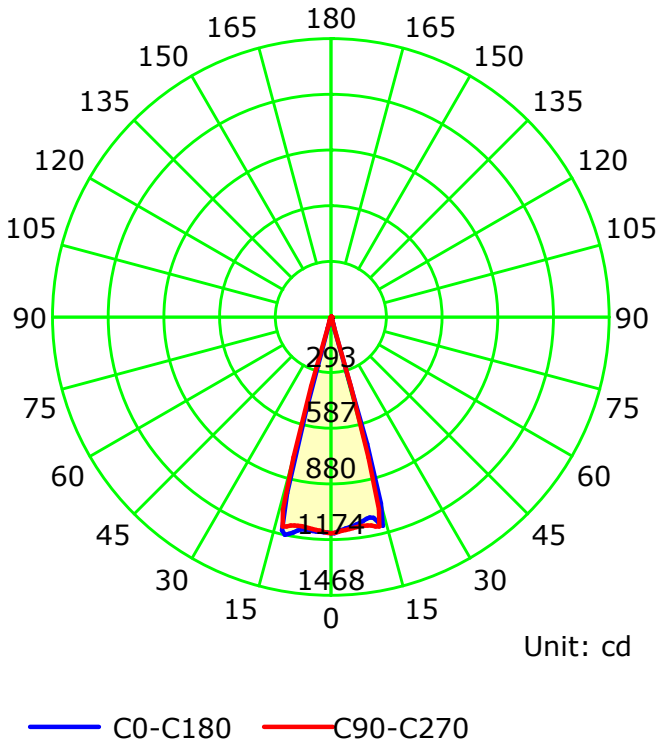


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

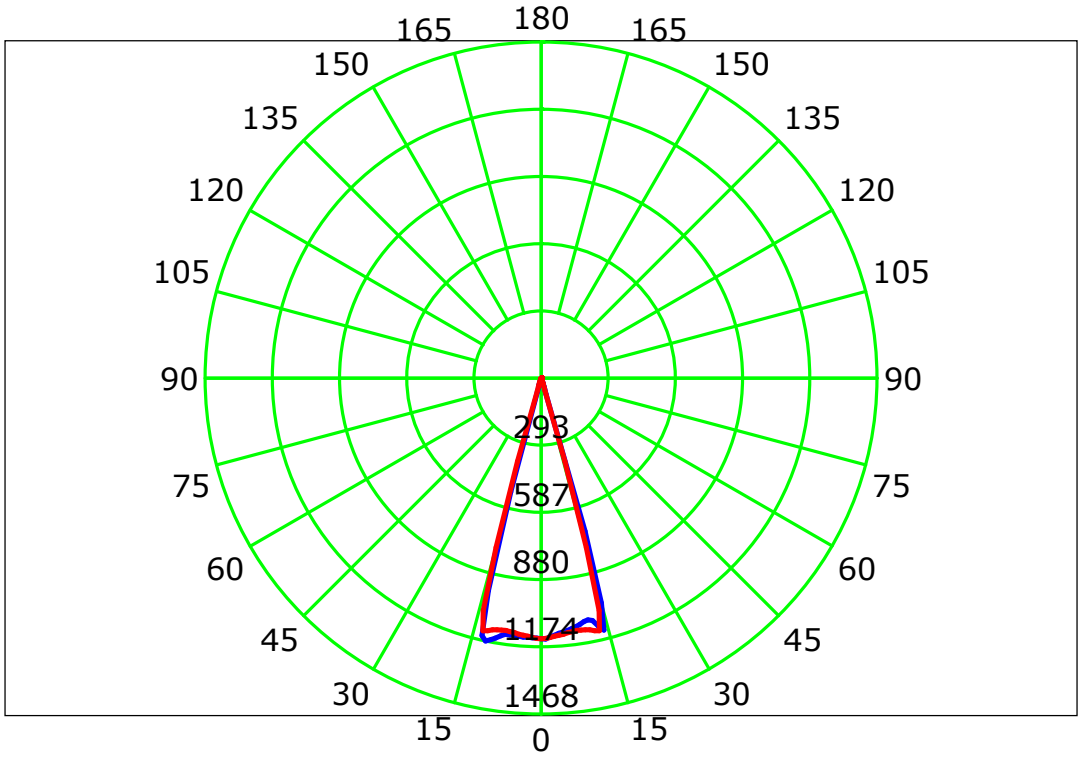


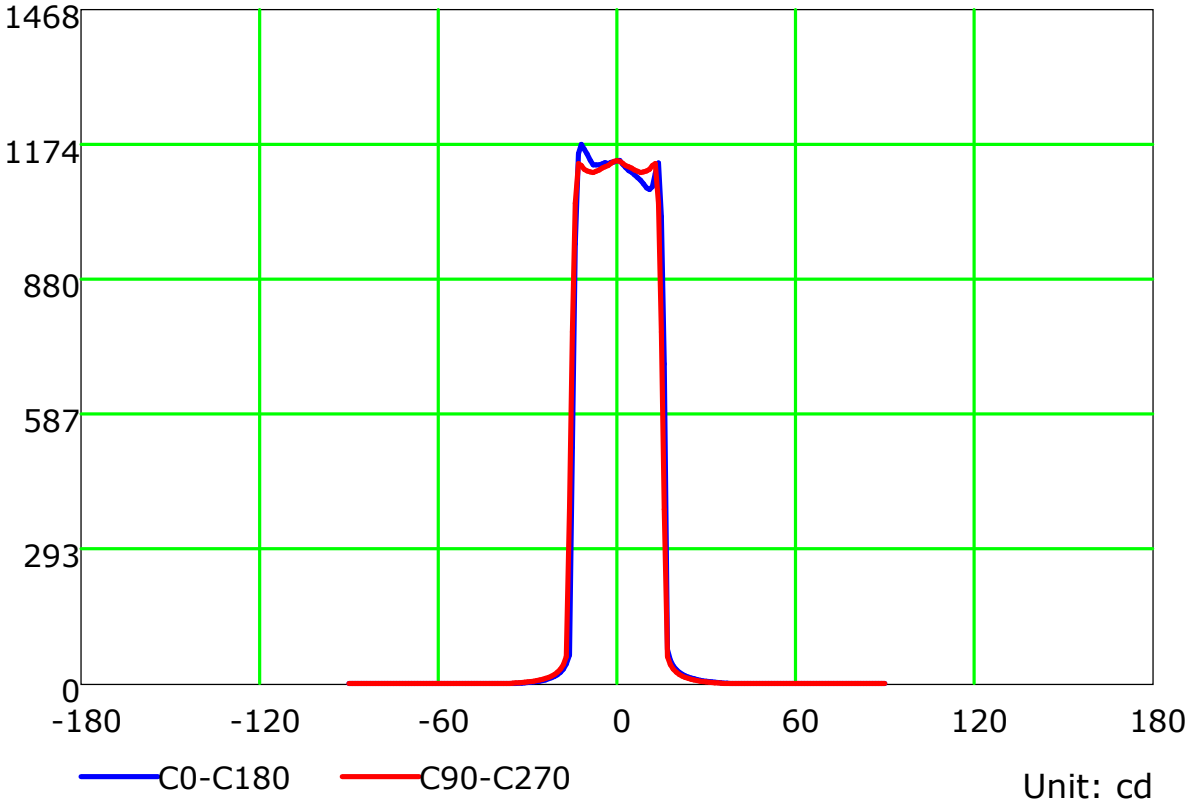

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

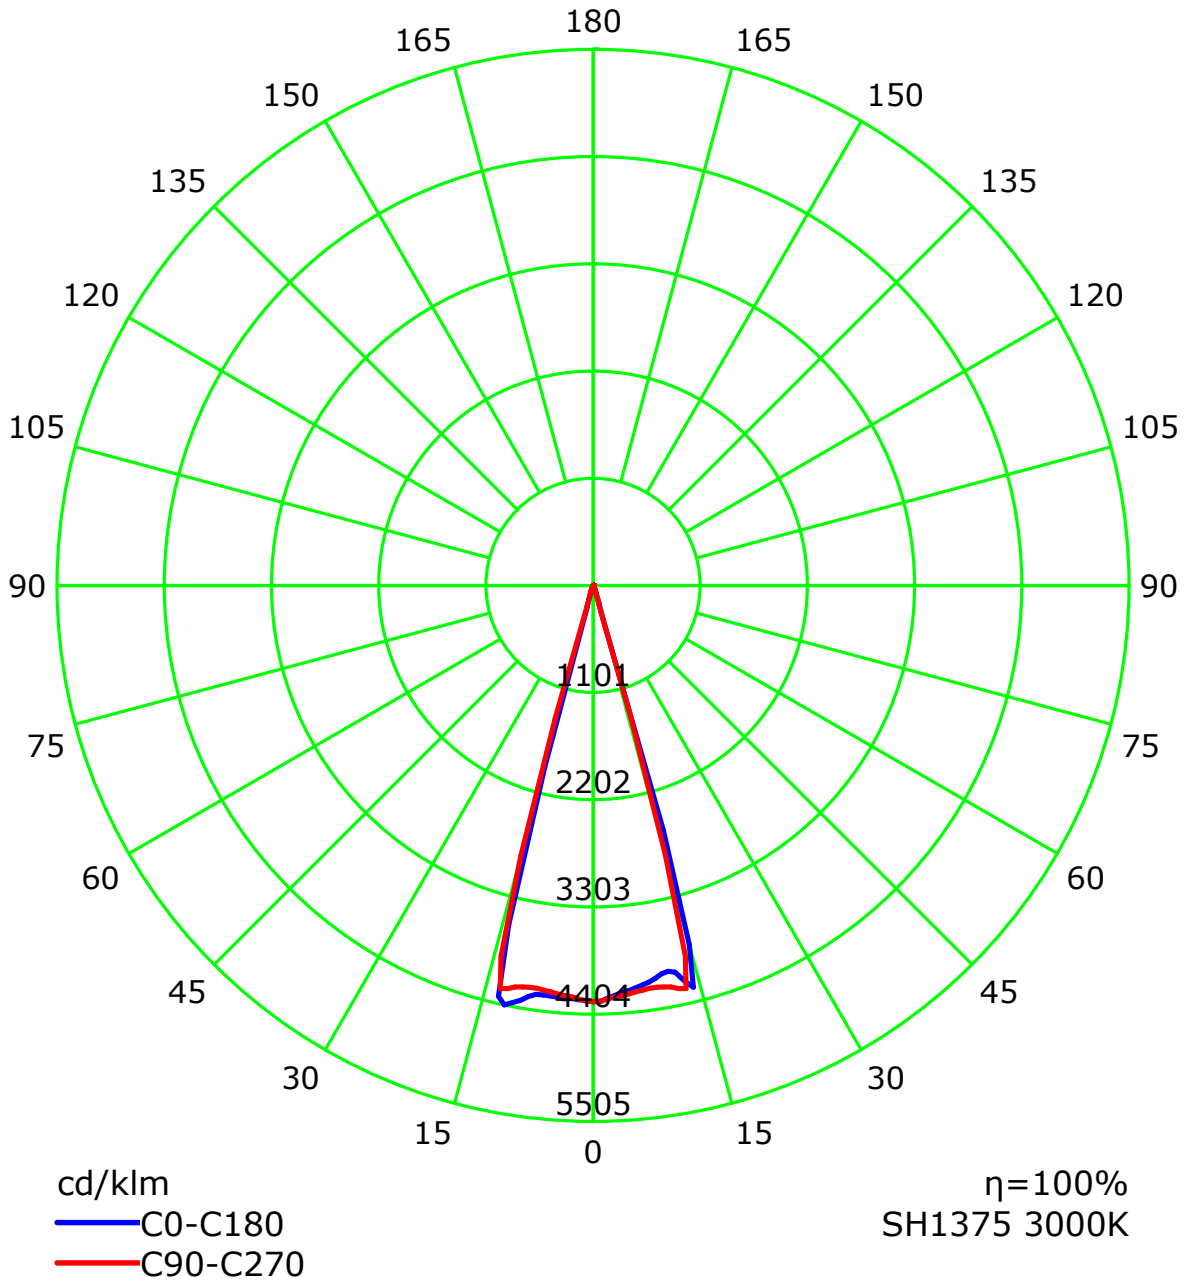

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Isocandela (rectangle)

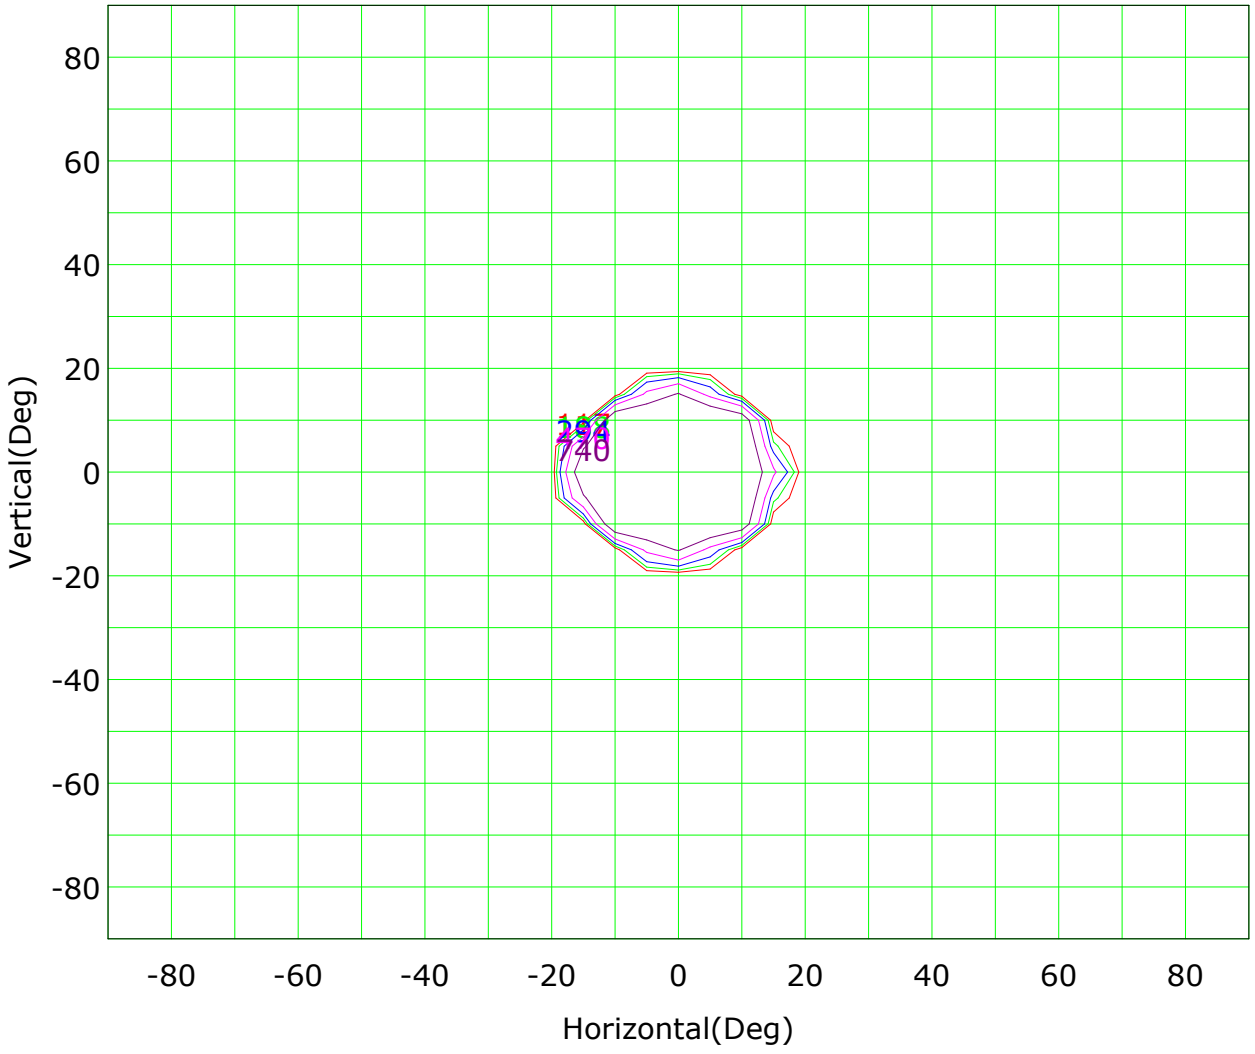


Imax (100%): 1175 cd

(10%): 117 cd
(16%): 188 cd
(25%): 294 cd
(40%): 470 cd
(63%): 740 cd
(100%): 1175 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

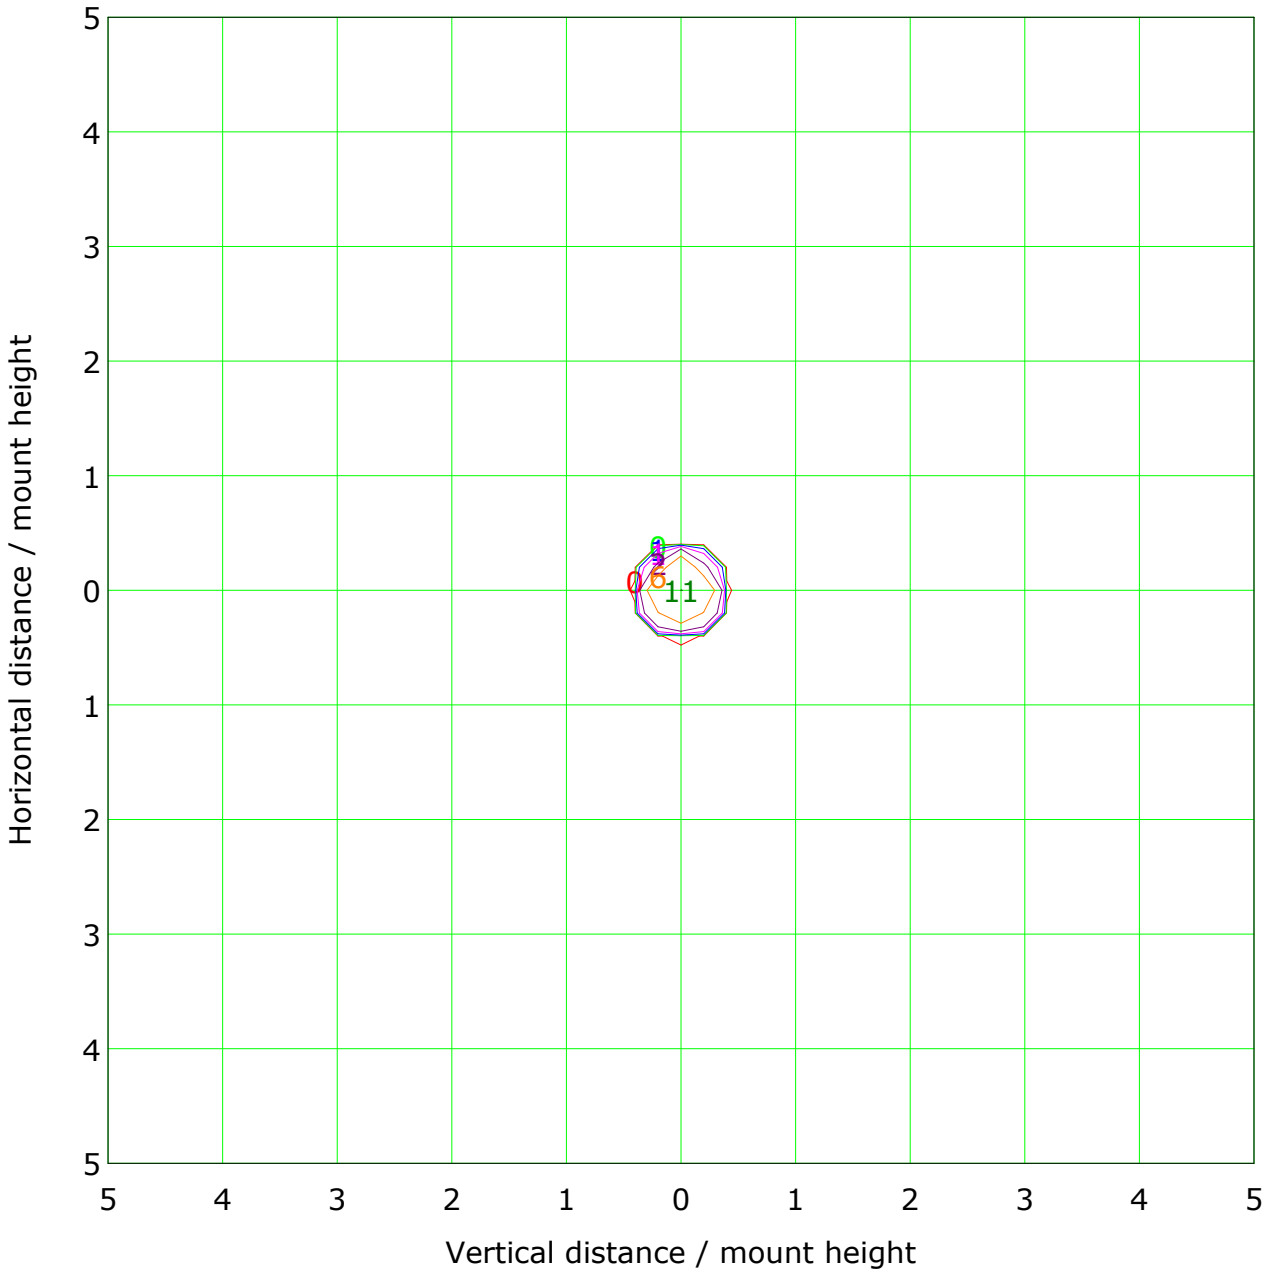


Mounting Height: 10.0m Max Lux(100%): 11.4 lx

(1%): 0.1 lx	(2%): 0.2 lx
(5%): 0.6 lx	(10%): 1.1 lx
(20%): 2.3 lx	(50%): 5.7 lx
(100%): 11.4 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Illuminance at a Distance

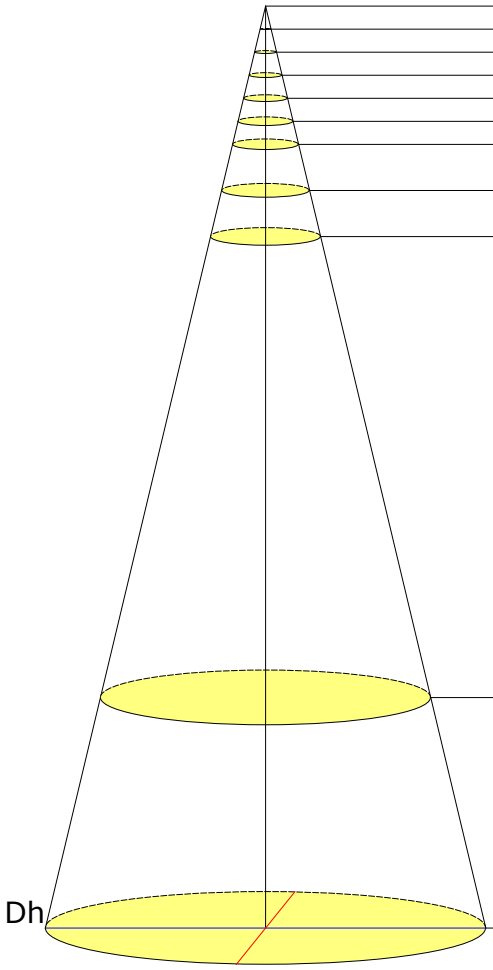


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	4558.56	0.28/0.28	0.1	2175.89
1.0	1139.64	0.55/0.55	0.2	543.97
1.5	506.51	0.83/0.83	0.5	241.77
2.0	284.91	1.11/1.11	1.0	135.99
2.5	182.34	1.39/1.39	1.5	87.04
3.0	126.63	1.66/1.66	2.2	60.44
4.0	71.23	2.22/2.22	3.9	34.00
5.0	45.59	2.77/2.77	6.1	21.76
15.0	5.07	8.32/8.32	54.5	2.42
20.0	2.85	11.10/11.10	96.9	1.36

Beam Angle(B): H31.0 V31.0 Field Angle(F): H32.8 V33.7

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Vertical IsoLux Plot

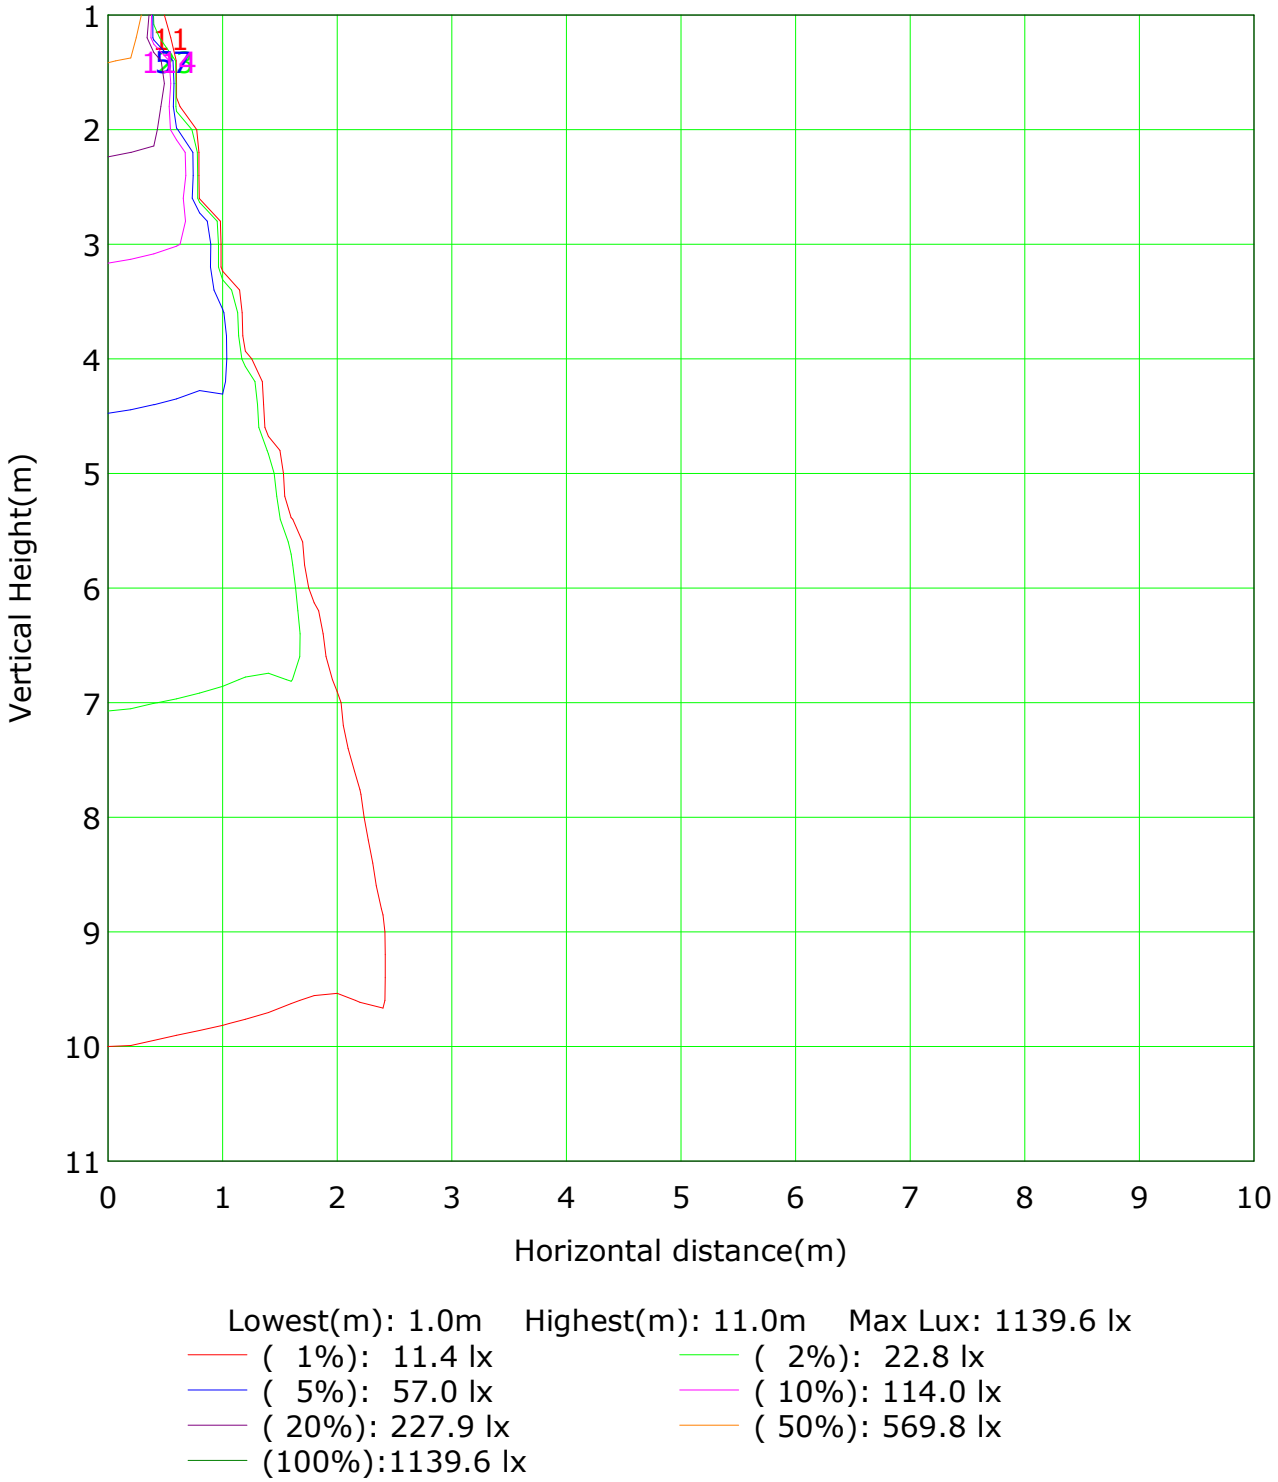

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1139.6 lx

(1%): 11.4 lx
(2%): 22.8 lx
(5%): 57.0 lx
(10%): 114.0 lx
(20%): 227.9 lx
(50%): 569.8 lx
(100%):1139.6 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20	0.0	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10	27.0	29.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	97.1	98.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	97.7	99.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	34.4	37.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30	0.0	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40	0.0	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90		266	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1.0	33.8	98.3	98.3	33.8	1.0	0.1	0.0
Flux(T)	256		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	31.4	96.7	96.7	31.4	0.0	0.0	0.0	0.0
Flux(E)																					

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 243.19lm

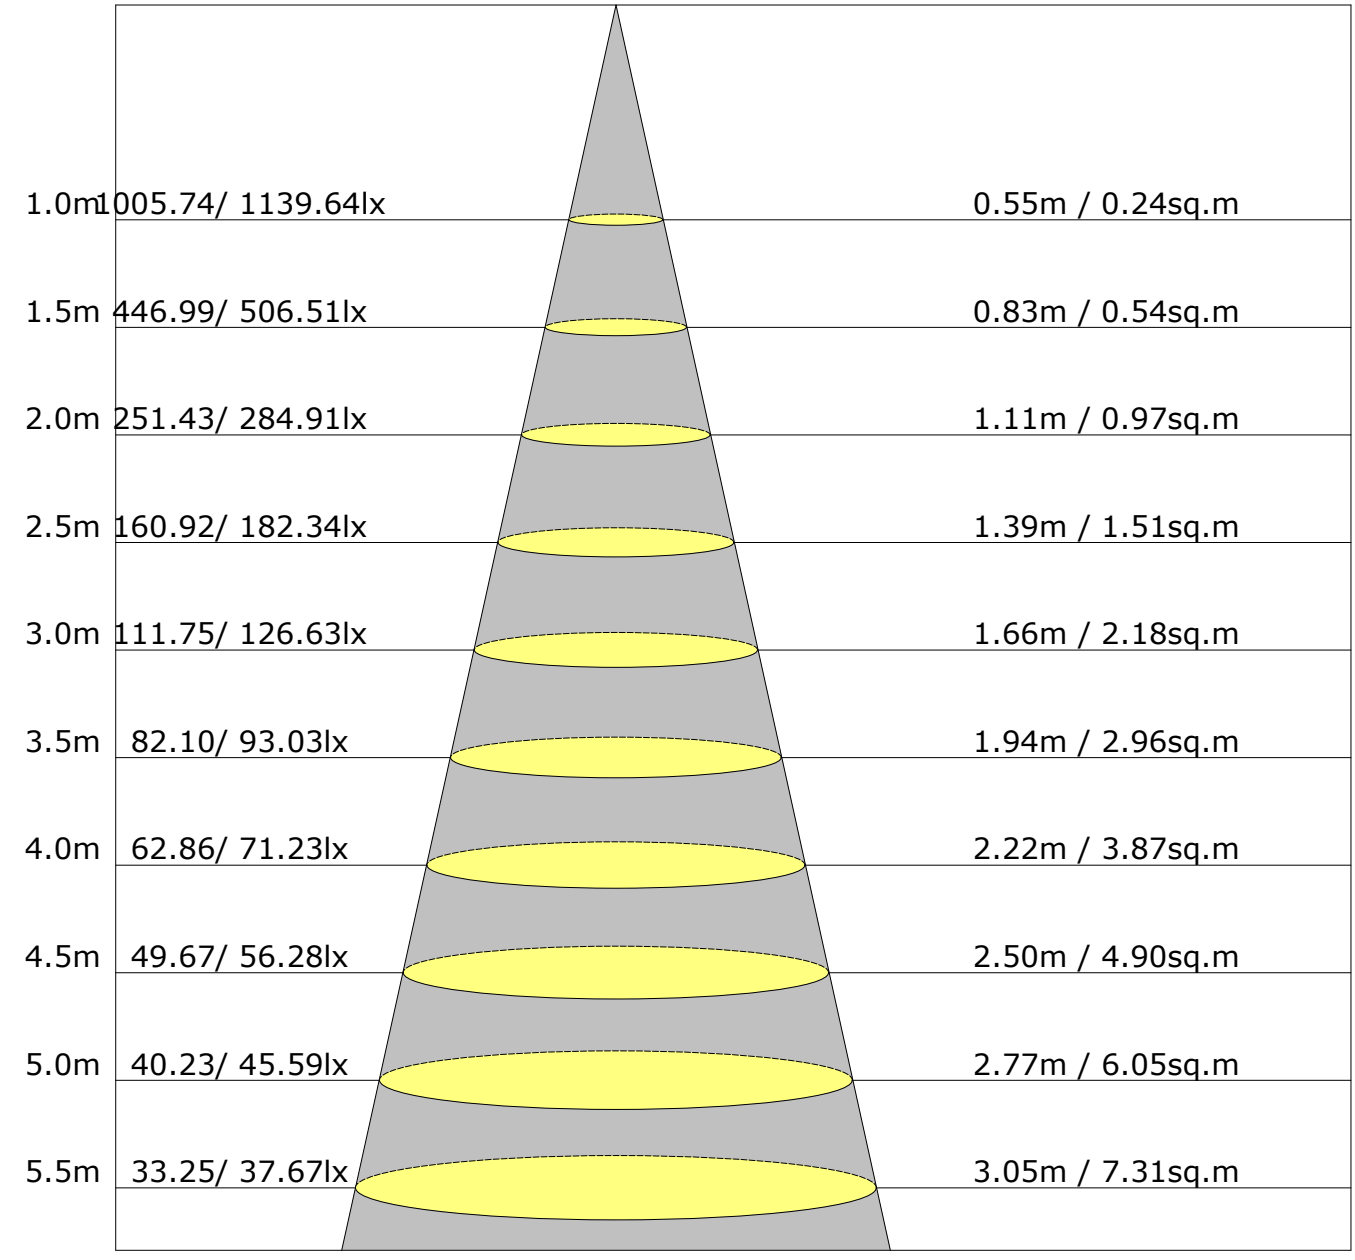

Height Avg./Nadir. E Beam Angle:31.0° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-9.0	-8.5	-8.8	-8.3	-8.1	-11.0	-10.5	-10.8	-10.3	-10.1
3H	-9.2	-8.7	-8.9	-8.4	-8.2	-11.2	-10.7	-10.9	-10.5	-10.2
4H	-9.2	-8.8	-8.9	-8.5	-8.3	-11.2	-10.8	-11.0	-10.5	-10.3
6H	-9.3	-8.9	-9.0	-8.6	-8.3	-11.3	-10.9	-11.0	-10.6	-10.3
8H	-9.3	-8.9	-9.0	-8.6	-8.3	-11.4	-10.9	-11.0	-10.7	-10.4
12H	-9.4	-9.0	-9.0	-8.7	-8.4	-11.4	-11.0	-11.1	-10.7	-10.4
X=4H Y=2H	-9.2	-8.8	-8.9	-8.5	-8.3	-11.2	-10.8	-11.0	-10.5	-10.3
3H	-9.4	-9.0	-9.0	-8.7	-8.4	-11.4	-11.0	-11.1	-10.7	-10.4
4H	-9.5	-9.1	-9.1	-8.8	-8.4	-11.5	-11.1	-11.1	-10.8	-10.5
6H	-9.6	-9.2	-9.2	-8.9	-8.5	-11.6	-11.3	-11.2	-10.9	-10.5
8H	-9.6	-9.3	-9.2	-8.9	-8.5	-11.6	-11.3	-11.2	-11.0	-10.6
12H	-9.7	-9.4	-9.2	-9.0	-8.6	-11.7	-11.4	-11.3	-11.0	-10.6
X=8H Y=4H	-9.6	-9.3	-9.2	-8.9	-8.5	-11.6	-11.3	-11.2	-11.0	-10.6
6H	-9.7	-9.5	-9.3	-9.1	-8.6	-11.7	-11.5	-11.3	-11.1	-10.6
8H	-9.8	-9.6	-9.3	-9.1	-8.6	-11.8	-11.6	-11.3	-11.1	-10.7
12H	-9.8	-9.6	-9.3	-9.2	-8.7	-11.8	-11.7	-11.4	-11.2	-10.7
X=12H Y=4H	-9.7	-9.4	-9.2	-9.0	-8.6	-11.7	-11.4	-11.3	-11.0	-10.6
6H	-9.8	-9.6	-9.3	-9.1	-8.6	-11.8	-11.6	-11.3	-11.1	-10.7
8H	-9.8	-9.6	-9.3	-9.2	-8.7	-11.8	-11.7	-11.4	-11.2	-10.7
Variations with the observer position at spacings:										
S=1.0H	+6.8/-1.$					+6.7/-1.$				
S=1.5H	+9.6/-1.$					+9.5/-1.$				
S=2.0H	+11.6/-1.$					+11.5/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 267lm (8log(F/F0) = -4.6).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

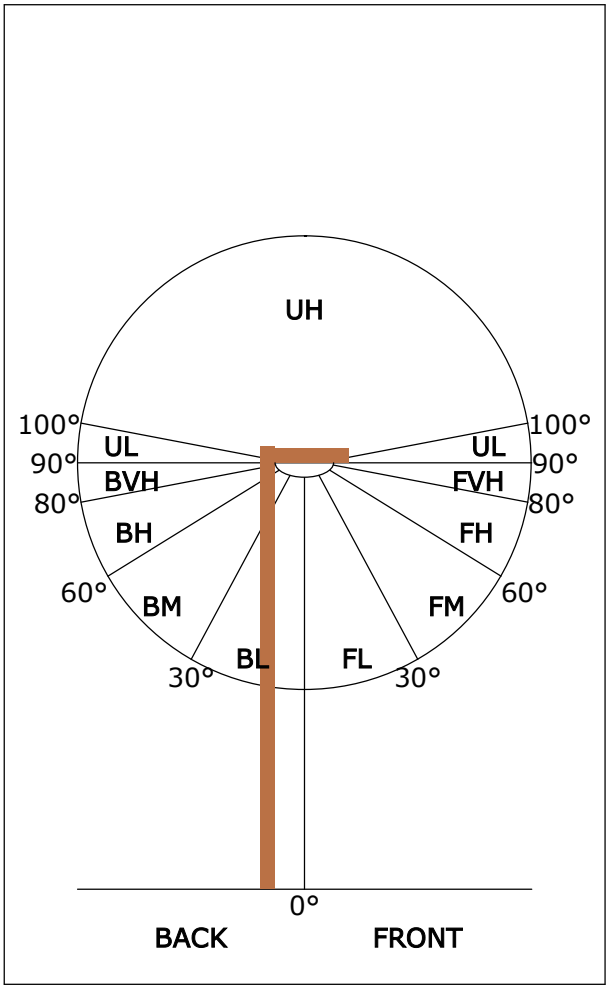

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	138	51.7
FL (0°-30°)	137	51.5
FM (30°-60°)	1	0.2
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	129	48.3
BL (0°-30°)	129	48.2
BM (30°-60°)	0	0.1
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1139.0	1.1	1.1	0.41	0.41
1.0-2.0	1136.0	3.3	4.4	1.22	1.63
2.0-3.0	1131.2	5.4	9.8	2.03	3.66
3.0-4.0	1127.6	7.5	17.3	2.83	6.49
4.0-5.0	1124.8	9.7	27.0	3.63	10.12
5.0-6.0	1121.2	11.8	38.8	4.42	14.54
6.0-7.0	1117.9	13.9	52.7	5.20	19.74
7.0-8.0	1115.1	16.0	68.6	5.99	25.73
8.0-9.0	1114.2	18.1	86.7	6.77	32.50
9.0-10.0	1115.8	20.2	106.9	7.57	40.07
10.0-11.0	1118.7	22.4	129.2	8.38	48.46
11.0-12.0	1124.6	24.6	153.8	9.22	57.67
12.0-13.0	1131.1	26.8	180.7	10.07	67.74
13.0-14.0	1090.0	27.9	208.6	10.46	78.20
14.0-15.0	906.3	24.9	233.4	9.33	87.53
15.0-16.0	572.9	16.8	250.2	6.30	93.83
16.0-17.0	219.2	6.8	257.1	2.56	96.39
17.0-18.0	50.1	1.7	258.7	0.62	97.01
18.0-19.0	36.6	1.3	260.0	0.48	97.49
19.0-20.0	28.3	1.0	261.0	0.39	97.87
20.0-21.0	22.5	0.9	261.9	0.32	98.20
21.0-22.0	18.4	0.7	262.6	0.28	98.47
22.0-23.0	15.2	0.6	263.3	0.24	98.71
23.0-24.0	12.5	0.5	263.8	0.21	98.92
24.0-25.0	10.3	0.5	264.3	0.18	99.09
25.0-26.0	8.7	0.4	264.7	0.15	99.25
26.0-27.0	7.4	0.4	265.0	0.14	99.38
27.0-28.0	6.1	0.3	265.4	0.12	99.50
28.0-29.0	5.0	0.3	265.6	0.10	99.60
29.0-30.0	4.2	0.2	265.8	0.09	99.68
30.0-31.0	3.5	0.2	266.0	0.07	99.76
31.0-32.0	2.8	0.2	266.2	0.06	99.82
32.0-33.0	2.2	0.1	266.3	0.05	99.87
33.0-34.0	1.8	0.1	266.4	0.04	99.91
34.0-35.0	1.2	0.1	266.5	0.03	99.94
35.0-36.0	0.8	0.1	266.6	0.02	99.95

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	0.6	0.0	266.6	0.02	99.97
37.0-38.0	0.5	0.0	266.6	0.01	99.98
38.0-39.0	0.3	0.0	266.7	0.01	99.99
39.0-40.0	0.2	0.0	266.7	0.01	100.00
40.0-41.0	0.1	0.0	266.7	0.00	100.00
41.0-42.0	0.0	0.0	266.7	0.00	100.00
42.0-43.0	0.0	0.0	266.7	0.00	100.00
43.0-44.0	0.0	0.0	266.7	0.00	100.00
44.0-45.0	0.0	0.0	266.7	0.00	100.00
45.0-46.0	0.0	0.0	266.7	0.00	100.00
46.0-47.0	0.0	0.0	266.7	0.00	100.00
47.0-48.0	0.0	0.0	266.7	0.00	100.00
48.0-49.0	0.0	0.0	266.7	0.00	100.00
49.0-50.0	0.0	0.0	266.7	0.00	100.00
50.0-51.0	0.0	0.0	266.7	0.00	100.00
51.0-52.0	0.0	0.0	266.7	0.00	100.00
52.0-53.0	0.0	0.0	266.7	0.00	100.00
53.0-54.0	0.0	0.0	266.7	0.00	100.00
54.0-55.0	0.0	0.0	266.7	0.00	100.00
55.0-56.0	0.0	0.0	266.7	0.00	100.00
56.0-57.0	0.0	0.0	266.7	0.00	100.00
57.0-58.0	0.0	0.0	266.7	0.00	100.00
58.0-59.0	0.0	0.0	266.7	0.00	100.00
59.0-60.0	0.0	0.0	266.7	0.00	100.00
60.0-61.0	0.0	0.0	266.7	0.00	100.00
61.0-62.0	0.0	0.0	266.7	0.00	100.00
62.0-63.0	0.0	0.0	266.7	0.00	100.00
63.0-64.0	0.0	0.0	266.7	0.00	100.00
64.0-65.0	0.0	0.0	266.7	0.00	100.00
65.0-66.0	0.0	0.0	266.7	0.00	100.00
66.0-67.0	0.0	0.0	266.7	0.00	100.00
67.0-68.0	0.0	0.0	266.7	0.00	100.00
68.0-69.0	0.0	0.0	266.7	0.00	100.00
69.0-70.0	0.0	0.0	266.7	0.00	100.00
70.0-71.0	0.0	0.0	266.7	0.00	100.00
71.0-72.0	0.0	0.0	266.7	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	266.7	0.00	100.00
73.0-74.0	0.0	0.0	266.7	0.00	100.00
74.0-75.0	0.0	0.0	266.7	0.00	100.00
75.0-76.0	0.0	0.0	266.7	0.00	100.00
76.0-77.0	0.0	0.0	266.7	0.00	100.00
77.0-78.0	0.0	0.0	266.7	0.00	100.00
78.0-79.0	0.0	0.0	266.7	0.00	100.00
79.0-80.0	0.0	0.0	266.7	0.00	100.00
80.0-81.0	0.0	0.0	266.7	0.00	100.00
81.0-82.0	0.0	0.0	266.7	0.00	100.00
82.0-83.0	0.0	0.0	266.7	0.00	100.00
83.0-84.0	0.0	0.0	266.7	0.00	100.00
84.0-85.0	0.0	0.0	266.7	0.00	100.00
85.0-86.0	0.0	0.0	266.7	0.00	100.00
86.0-87.0	0.0	0.0	266.7	0.00	100.00
87.0-88.0	0.0	0.0	266.7	0.00	100.00
88.0-89.0	0.0	0.0	266.7	0.00	100.00
89.0-90.0	0.0	0.0	266.7	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	1139.6	1139.6								
G1.0	1140.0	1136.7								
G2.0	1131.4	1135.7								
G3.0	1124.5	1133.1								
G4.0	1117.7	1135.2								
G5.0	1114.1	1132.3								
G6.0	1108.4	1130.0								
G7.0	1102.8	1130.4								
G8.0	1096.9	1130.6								
G9.0	1089.4	1140.0								
G10.0	1079.9	1153.9								
G11.0	1076.7	1164.3								
G12.0	1082.7	1174.7								
G13.0	1111.8	1155.1								
G14.0	1134.7	958.3								
G15.0	1017.6	514.5								
G16.0	696.7	62.6								
G17.0	74.5	42.9								
G18.0	51.1	31.8								
G19.0	38.8	24.5								
G20.0	30.5	19.2								
G21.0	24.7	15.4								
G22.0	20.6	12.7								
G23.0	17.2	10.5								
G24.0	14.2	8.2								
G25.0	12.0	6.9								
G26.0	10.5	5.5								
G27.0	8.8	4.8								
G28.0	7.2	3.6								
G29.0	6.2	2.9								
G30.0	5.5	2.2								
G31.0	4.5	1.9								
G32.0	3.6	1.4								
G33.0	3.1	0.9								
G34.0	2.6	0.5								
G35.0	1.7	0.2								
G36.0	1.4	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	1.2	0.0								
G38.0	0.7	0.0								
G39.0	0.7	0.0								
G40.0	0.2	0.0								
G41.0	0.2	0.0								
G42.0	0.0	0.0								
G43.0	0.0	0.0								
G44.0	0.0	0.0								
G45.0	0.0	0.0								
G46.0	0.0	0.0								
G47.0	0.0	0.0								
G48.0	0.0	0.0								
G49.0	0.0	0.0								
G50.0	0.0	0.0								
G51.0	0.0	0.0								
G52.0	0.0	0.0								
G53.0	0.0	0.0								
G54.0	0.0	0.0								
G55.0	0.0	0.0								
G56.0	0.0	0.0								
G57.0	0.0	0.0								
G58.0	0.0	0.0								
G59.0	0.0	0.0								
G60.0	0.0	0.0								
G61.0	0.0	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector: