中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.: Test Time: 2026-10-06 16:26

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: LITE 45-250MA
Luminous Length (mm): -42
Voltage: 230.0 V
Power: 9.90 W
Lamp Description: BLX V6HD F90 3000K
Luminous Width (mm): -42
Current: 0.084 A
Power Factor: 0.510


Photometric Results

CIE Class: Direct
Measurement Flux: 944.3 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H39.4
Vertical Diffuse Angle(50%): V39.4
Luminaire Efficacy Rating (LER): 95.44
Max. Intensity: 2102.37 cd
S/MH(C0/C180): 0.66
Total Rated Lamp Lumens: 944.3 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 2075.42 cd
Pos of Max. Intensity: H180 V4
S/MH(C90/C270): 0.66

Picture Of Luminaire





Luminous Intensity Distribution Curve

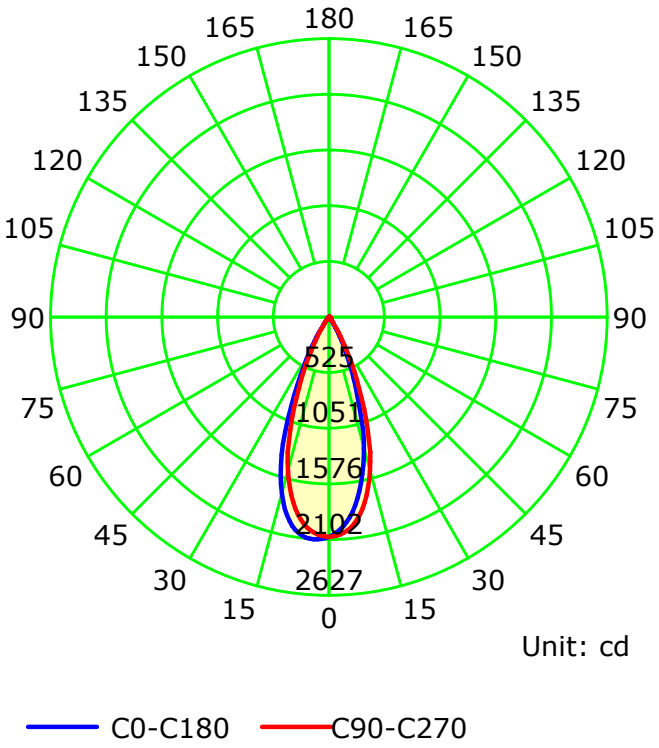

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:
Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

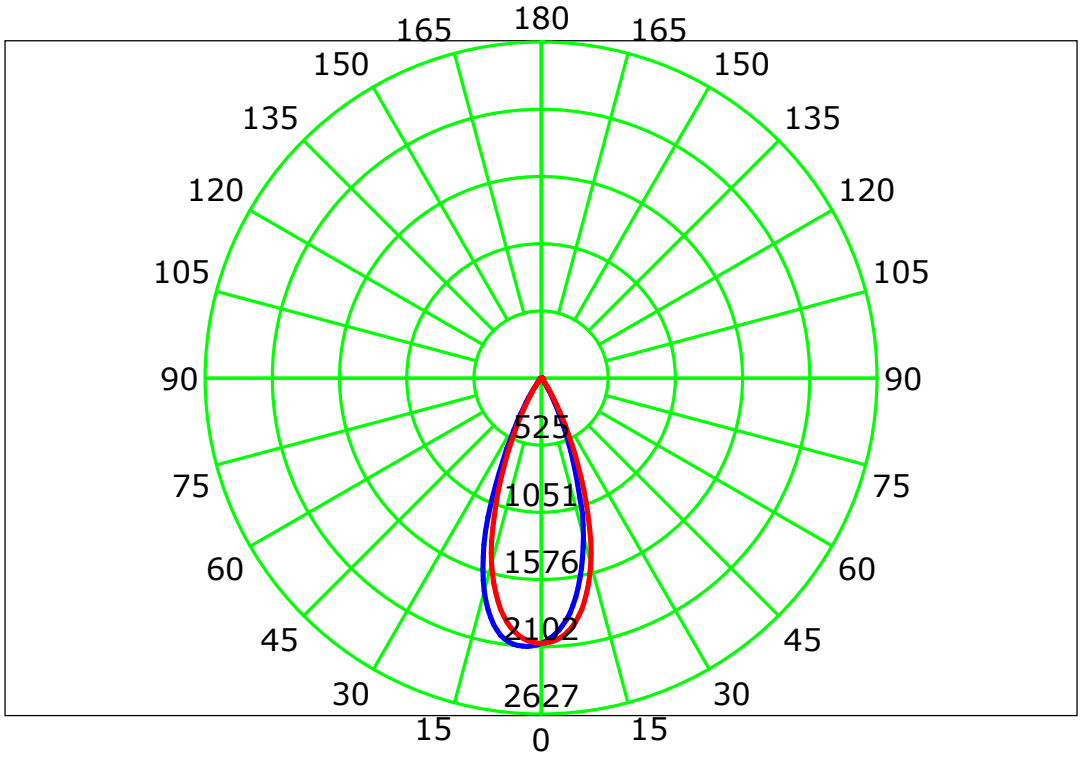


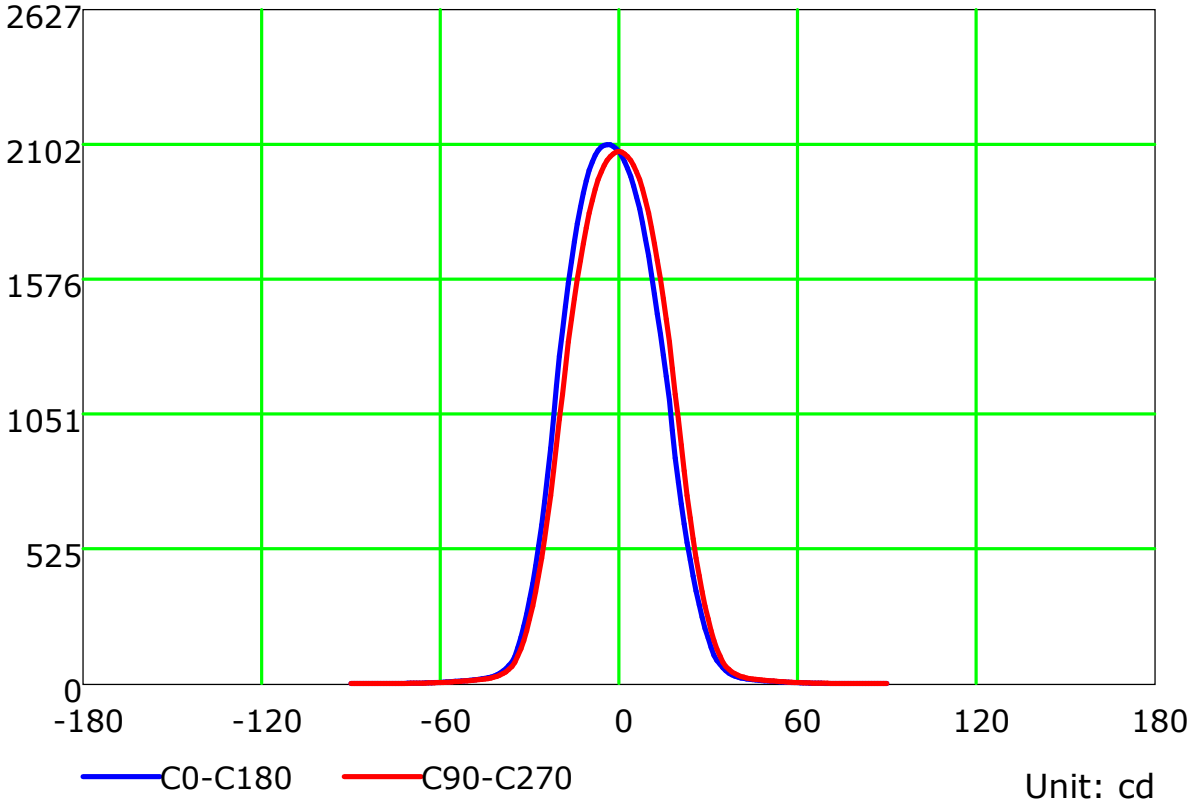

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

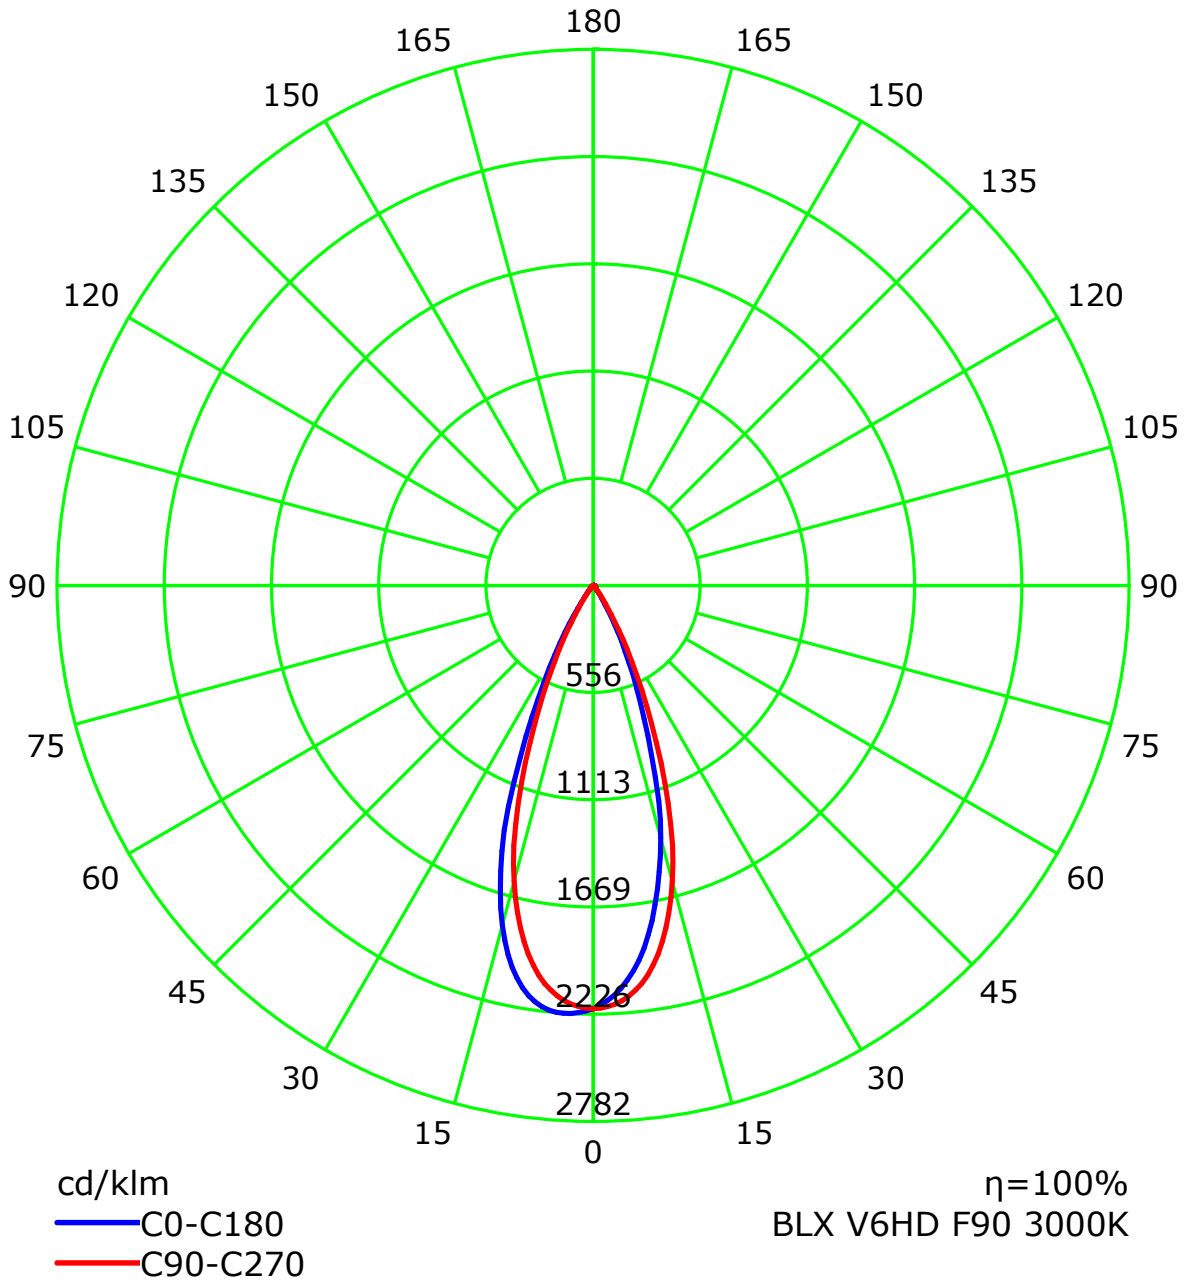

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Isocandela (rectangle)

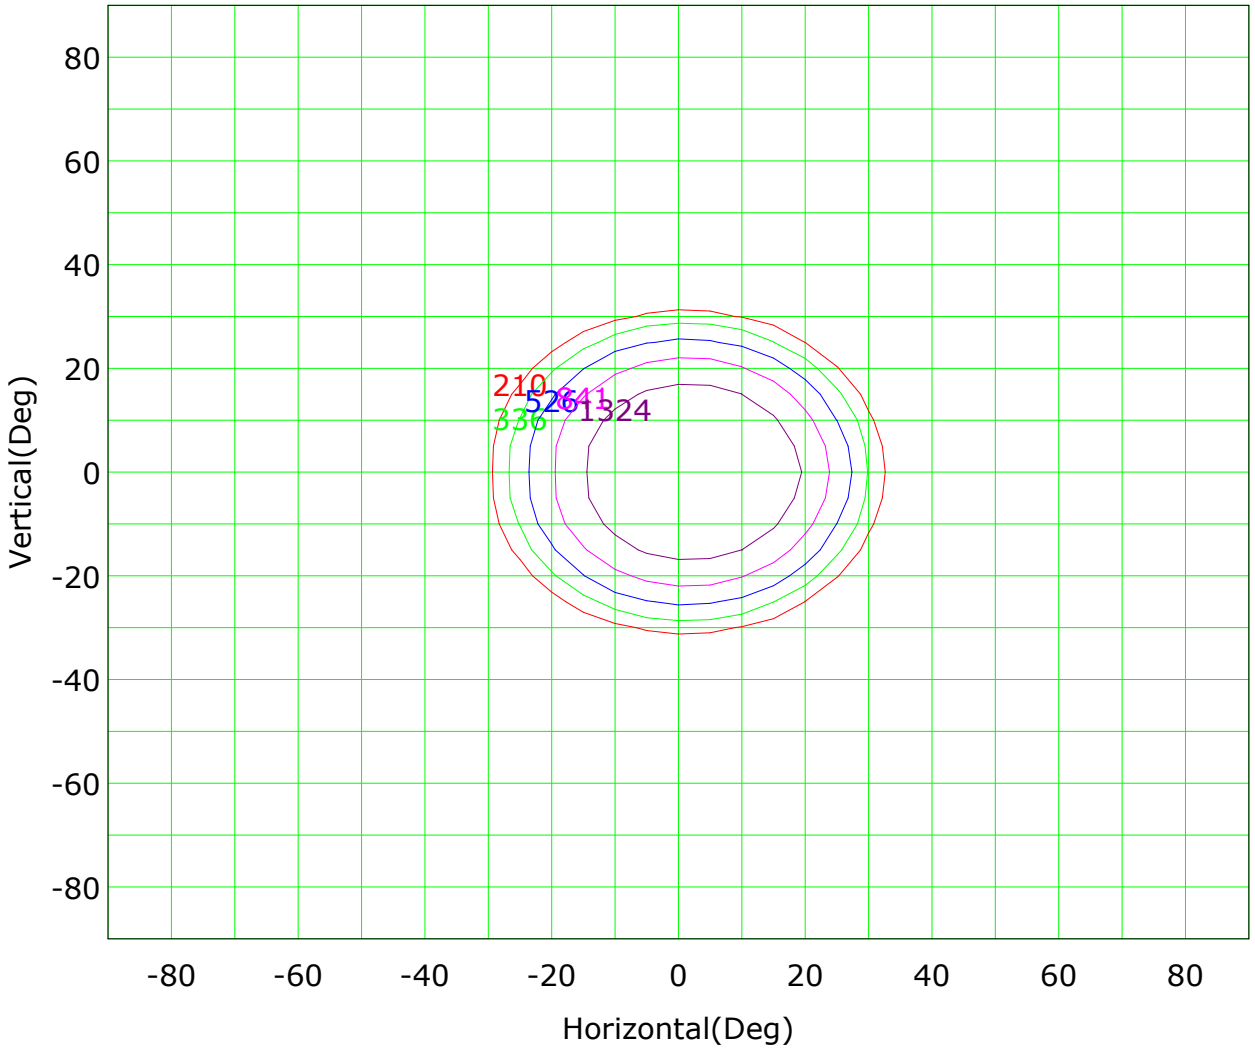


Imax (100%): 2102 cd

(10%): 210 cd
(25%): 526 cd
(63%): 1324 cd
(16%): 336 cd
(40%): 841 cd
(100%): 2102 cd

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

IsoLux Plot

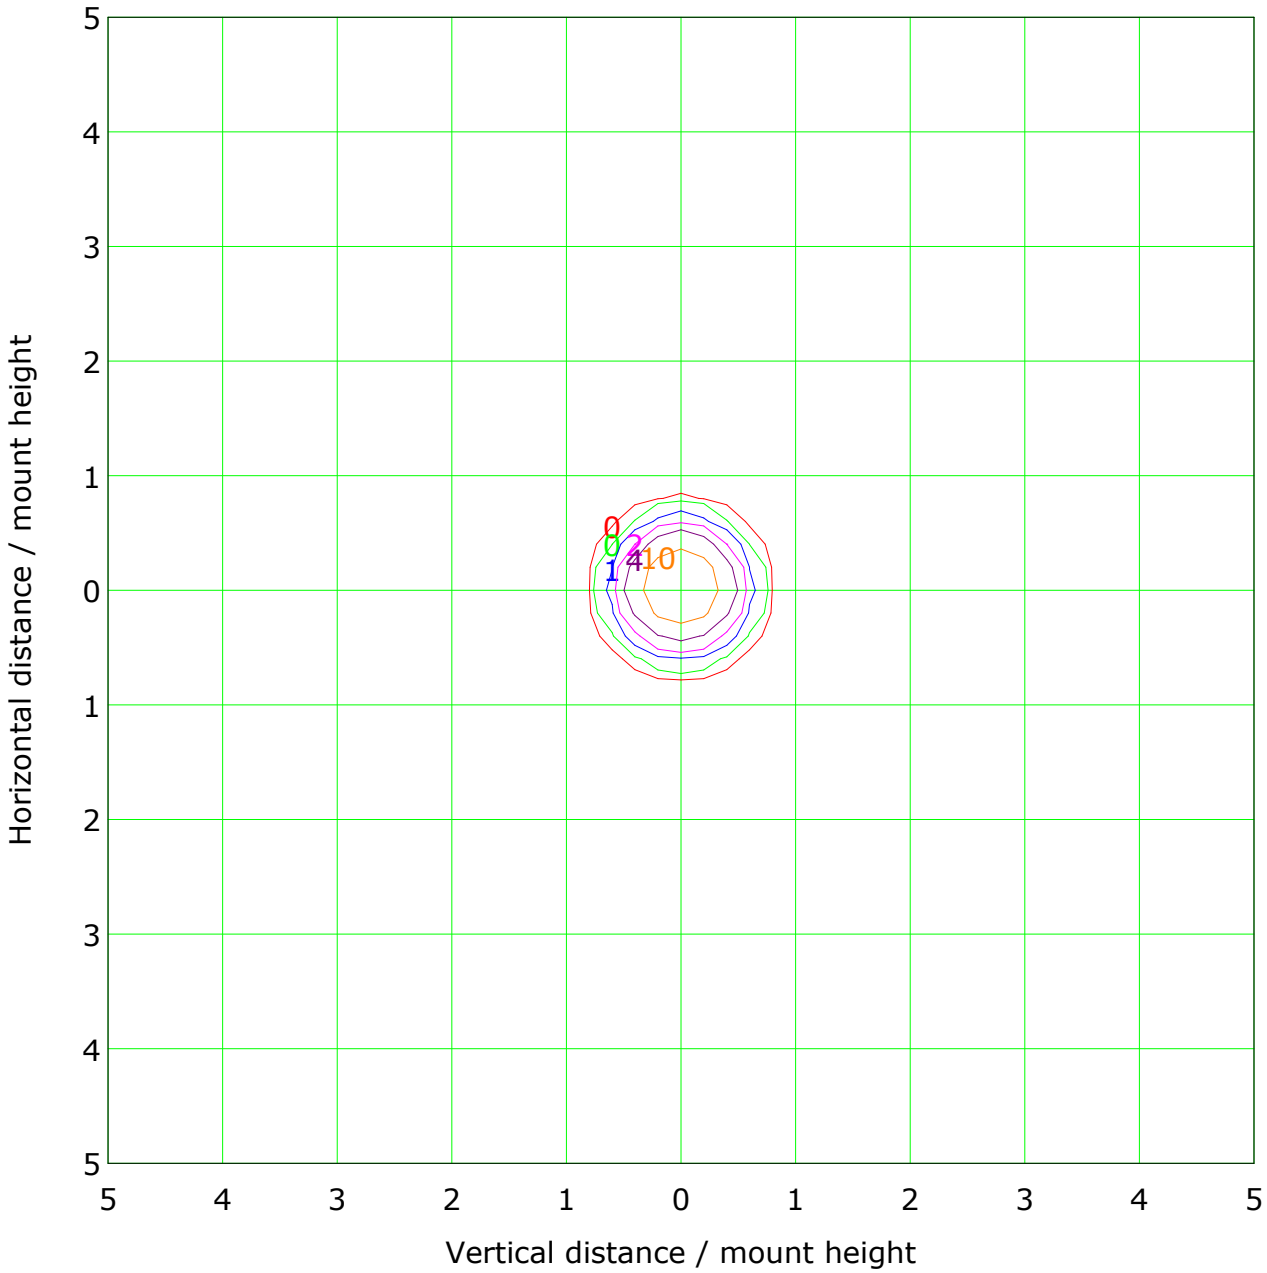


Mounting Height: 10.0m Max Lux(100%): 20.9 lx

(1%): 0.2 lx
(2%): 0.4 lx
(5%): 1.0 lx
(10%): 2.1 lx
(20%): 4.2 lx
(50%): 10.5 lx
(100%): 20.9 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

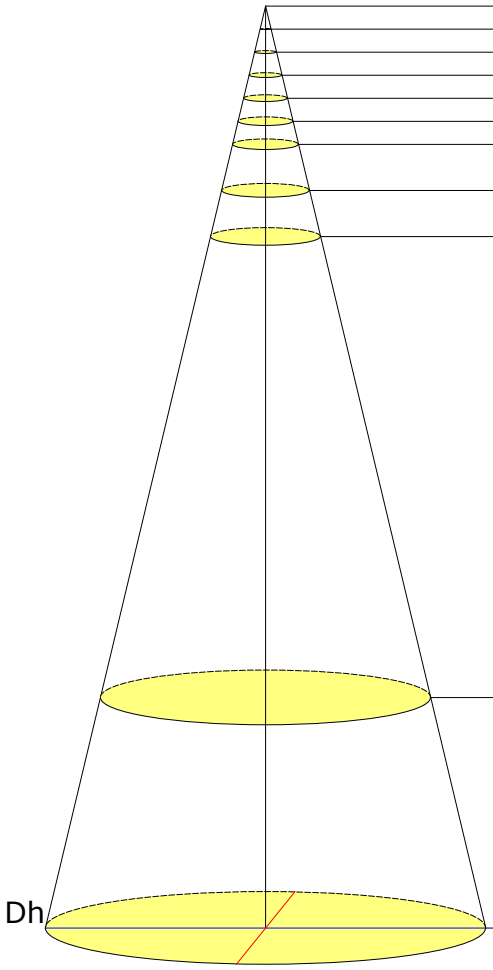


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	8301.68	0.36/0.36	0.1	3809.61
1.0	2075.42	0.71/0.73	0.4	952.40
1.5	922.41	1.07/1.09	0.9	423.29
2.0	518.85	1.43/1.45	1.6	238.10
2.5	332.07	1.79/1.81	2.5	152.38
3.0	230.60	2.14/2.18	3.6	105.82
4.0	129.71	2.86/2.90	6.5	59.53
5.0	83.02	3.57/3.63	10.1	38.10
15.0	9.22	10.72/10.88	91.2	4.23
20.0	5.19	14.30/14.50	162.1	2.38

Beam Angle(B): H39.3 V39.9 Field Angle(F): H61.4 V62.0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Vertical IsoLux Plot

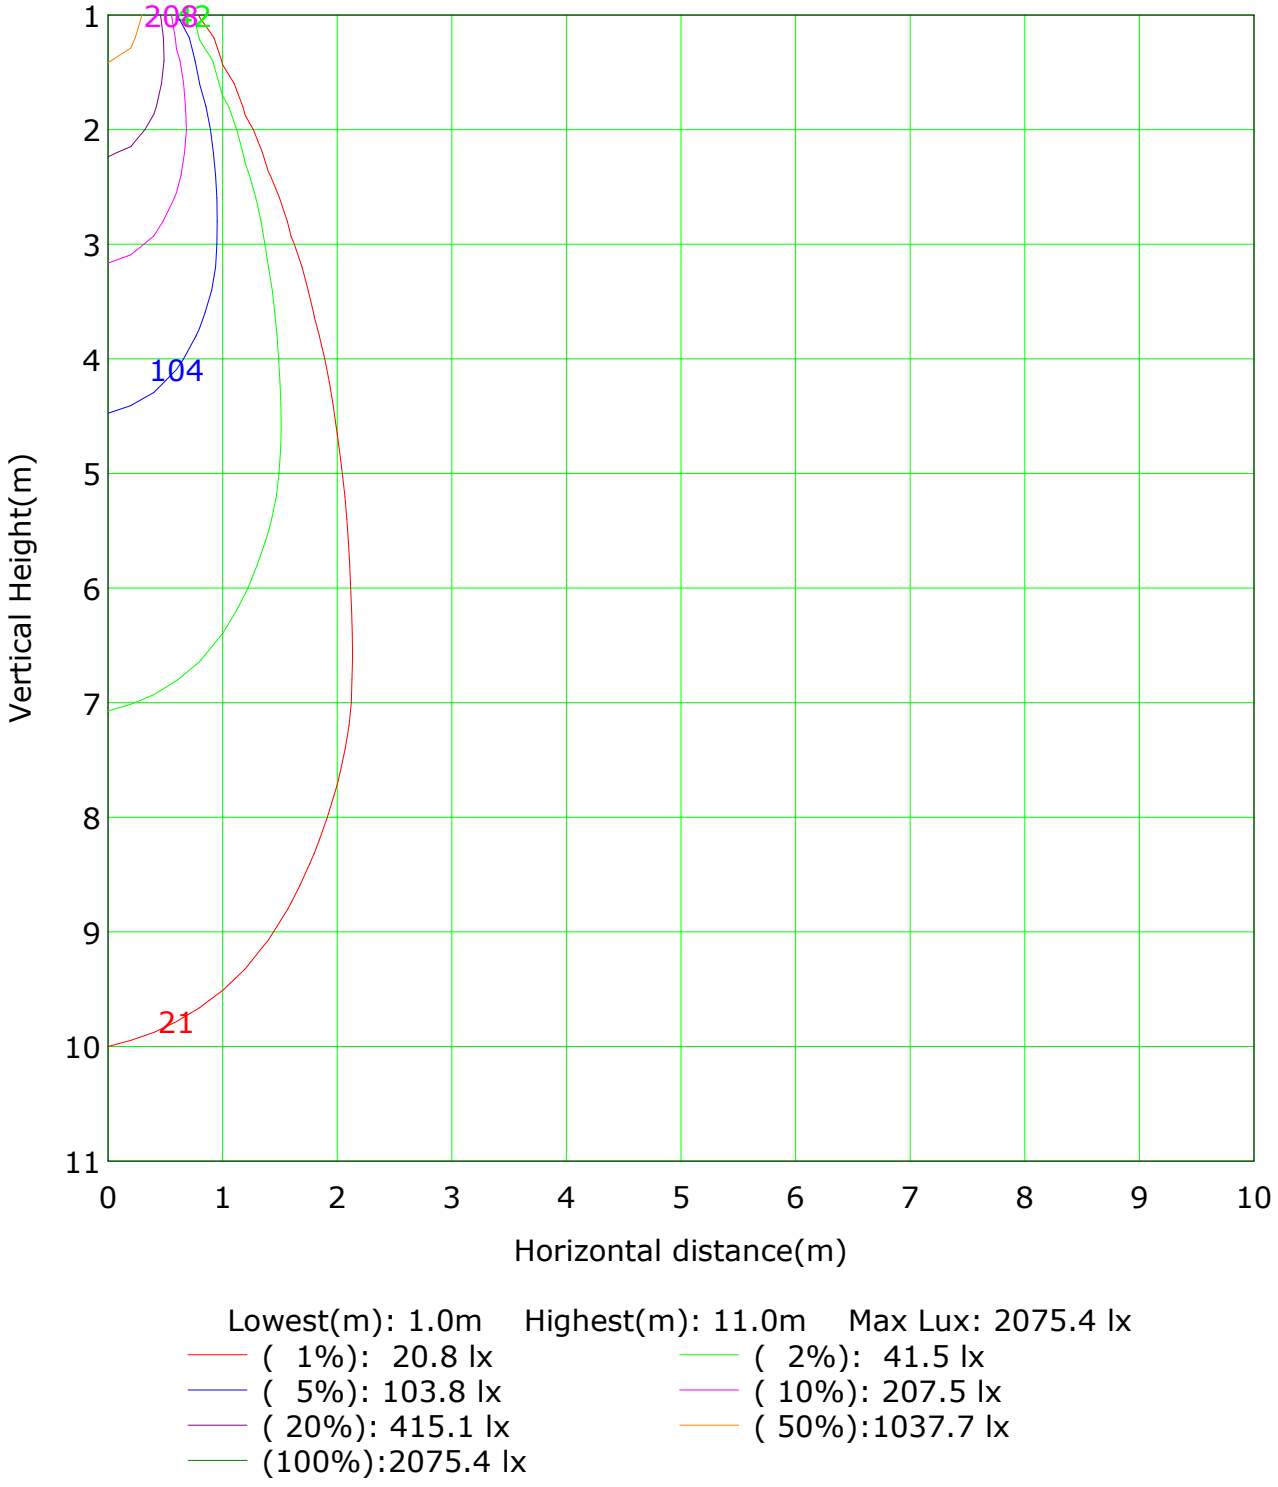

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 2075.4 lx

(1%): 20.8 lx
(2%): 41.5 lx
(5%): 103.8 lx
(10%): 207.5 lx
(20%): 415.1 lx
(50%):1037.7 lx
(100%):2075.4 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.218 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.5	0.4	0.3	0.2	0.1	0.1	0.0	0.0	0.0	0.0	3.0	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.2	0.4	0.5	0.4	0.3	0.2	0.2	0.1	0.0	0.0	0.0	0.0	12.9	2.3
-30	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.4	0.8	0.8	0.7	0.6	0.4	0.3	0.2	0.1	0.0	0.0	0.0	68.3	59.4
-20	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	1.8	1.5	1.2	0.8	0.6	0.4	0.2	0.1	0.0	0.0	178.4	171.1
-10	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	249.0	242.1
0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	233.1	226.2
10	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	140.6	132.9
20	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	45.4	34.2
30	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	8.4	0.0
40	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	2.4	0.0
50	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	0.8	0.0
60	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	0.2	0.0
70	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.6	1.2	2.0	1.8	1.5	1.1	0.8	0.5	0.3	0.2	0.1	0.0	0.0	0.0
90																				944	868
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 580.42lm

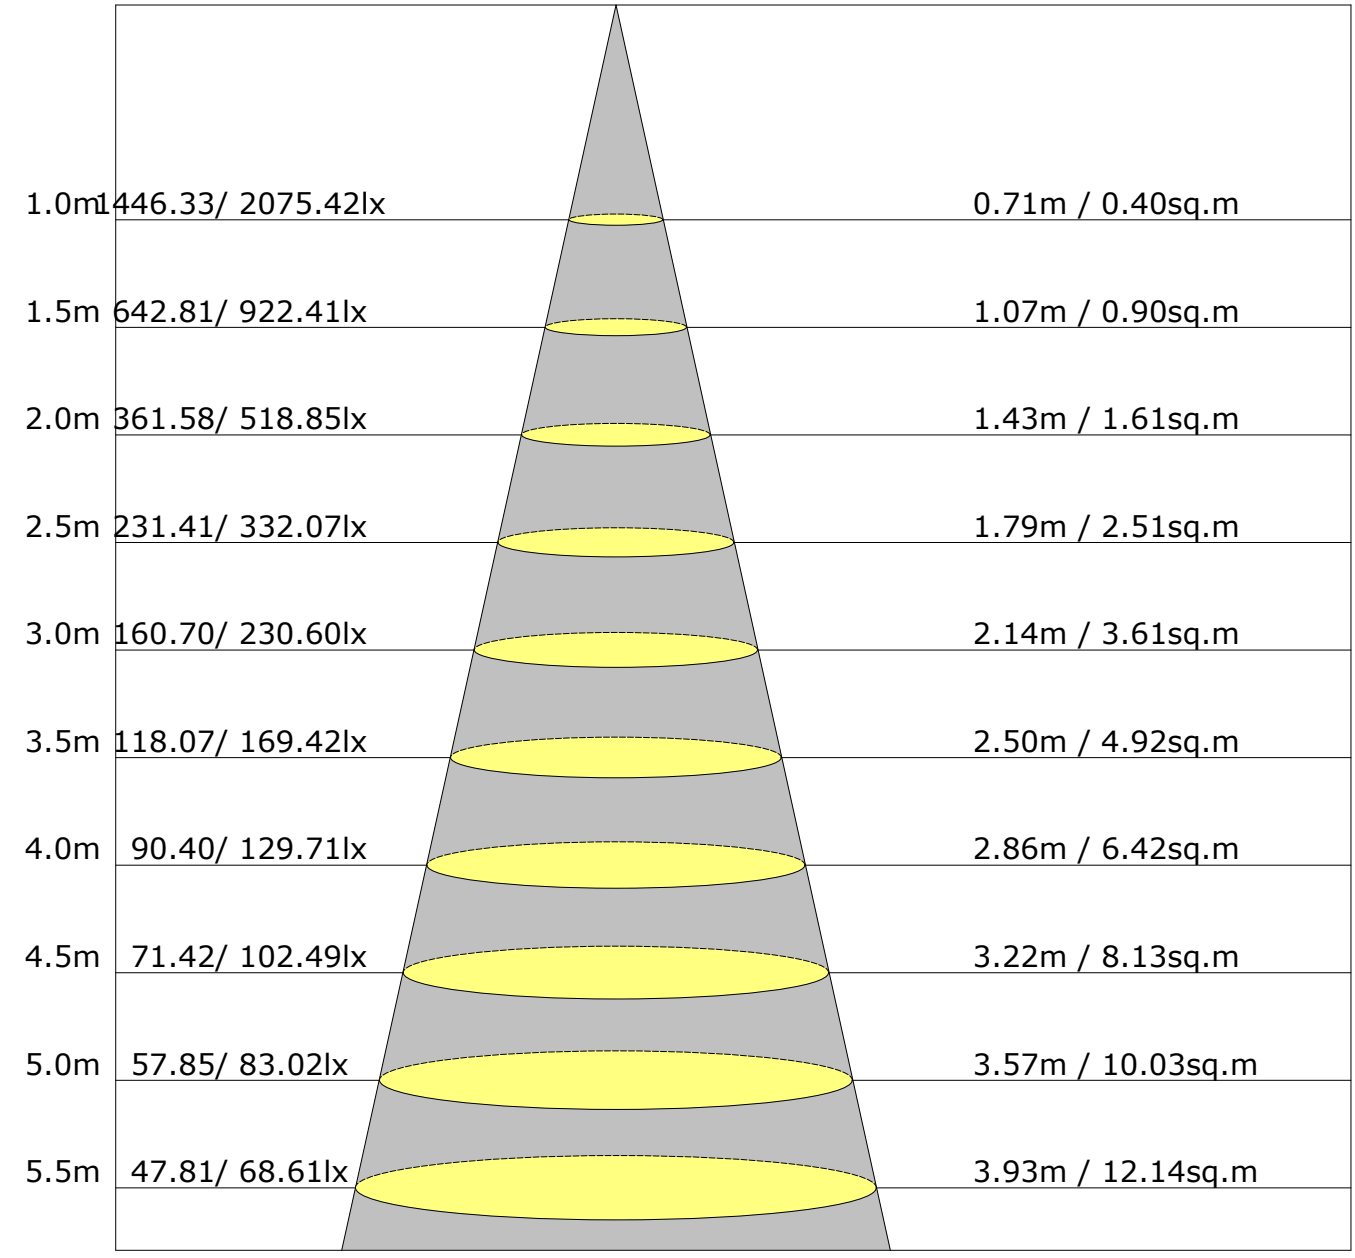

Height Avg./Nadir. E Beam Angle:39.3° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

UGR Table


Reflectance: Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	13.6	14.3	13.8	14.5	14.7	15.0	15.8	15.3	15.9	16.1
3H	13.5	14.2	13.8	14.4	14.6	15.0	15.6	15.3	15.8	16.1
4H	13.5	14.1	13.8	14.3	14.6	14.9	15.5	15.2	15.8	16.0
6H	13.4	13.9	13.7	14.2	14.5	14.8	15.4	15.2	15.7	16.0
8H	13.3	13.9	13.7	14.2	14.5	14.8	15.3	15.1	15.6	15.9
12H	13.3	13.8	13.7	14.1	14.4	14.8	15.3	15.1	15.6	15.9
X=4H Y=2H	13.5	14.1	13.8	14.3	14.6	14.9	15.5	15.2	15.8	16.0
3H	13.4	13.9	13.8	14.2	14.6	14.8	15.3	15.2	15.7	16.0
4H	13.4	13.8	13.7	14.2	14.5	14.8	15.2	15.1	15.6	15.9
6H	13.3	13.7	13.7	14.0	14.4	14.7	15.1	15.1	15.5	15.8
8H	13.2	13.6	13.6	14.0	14.4	14.6	15.0	15.1	15.4	15.8
12H	13.2	13.5	13.6	13.9	14.4	14.6	14.9	15.0	15.3	15.8
X=8H Y=4H	13.2	13.6	13.7	14.0	14.4	14.6	15.0	15.1	15.4	15.8
6H	13.1	13.4	13.6	13.9	14.3	14.6	14.9	15.0	15.3	15.7
8H	13.1	13.4	13.6	13.8	14.3	14.5	14.8	15.0	15.2	15.7
12H	13.0	13.3	13.5	13.7	14.2	14.5	14.7	14.9	15.2	15.7
X=12H Y=4H	13.2	13.5	13.6	13.9	14.4	14.6	14.9	15.0	15.3	15.8
6H	13.1	13.4	13.6	13.8	14.3	14.5	14.8	15.0	15.2	15.7
8H	13.0	13.3	13.5	13.7	14.2	14.5	14.7	14.9	15.2	15.7
Variations with the observer position at spacings:										
S=1.0H	+4.8/-4.9					+5.5/-5.5				
S=1.5H	+7.5/-7.6					+8.2/-8.0				
S=2.0H	+9.5/-9.8					+10.1/-10.3				

Calculate in accordance with CIE Pub.117. The table is revised with 944lm (8log(F/F0) = -0.2).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

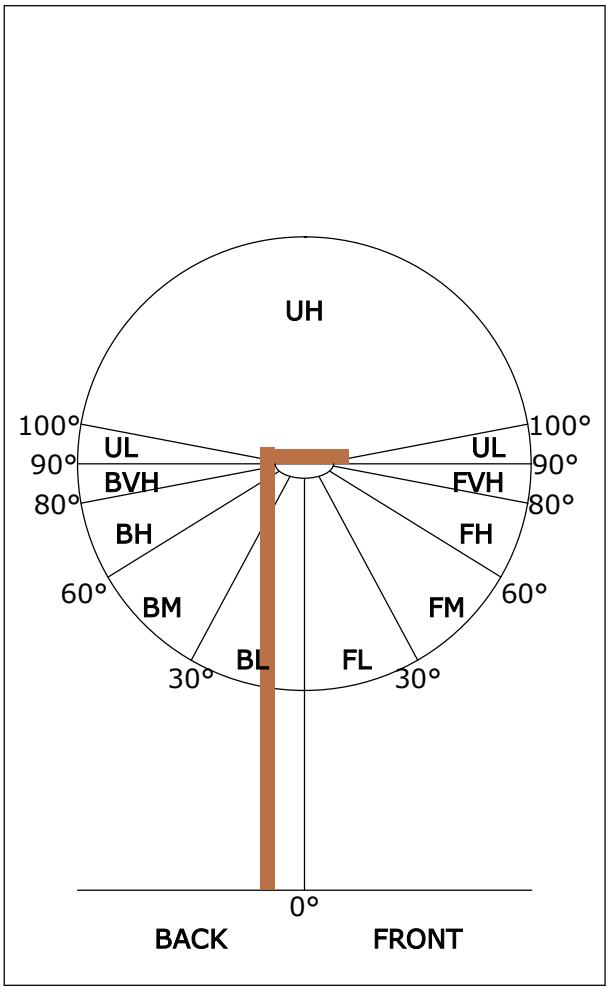

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	431	45.7
FL (0°-30°)	393	41.6
FM (30°-60°)	37	3.9
FH (60°-80°)	1	0.1
FVH (80°-90°)	0	0.0
BACK LIGHT	513	54.3
BL (0°-30°)	463	49.1
BM (30°-60°)	48	5.1
BH (60°-80°)	2	0.2
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2073.9	2.0	2.0	0.21	0.21
1.0-2.0	2069.0	5.9	7.9	0.63	0.84
2.0-3.0	2060.6	9.9	17.8	1.04	1.88
3.0-4.0	2048.0	13.7	31.5	1.45	3.33
4.0-5.0	2030.3	17.5	49.0	1.85	5.18
5.0-6.0	2007.9	21.1	70.1	2.23	7.42
6.0-7.0	1980.3	24.6	94.6	2.60	10.02
7.0-8.0	1946.6	27.9	122.5	2.95	12.97
8.0-9.0	1906.3	30.9	153.4	3.27	16.25
9.0-10.0	1859.8	33.7	187.1	3.56	19.81
10.0-11.0	1806.3	36.1	223.2	3.82	23.63
11.0-12.0	1747.0	38.2	261.4	4.04	27.68
12.0-13.0	1683.0	39.9	301.3	4.23	31.91
13.0-14.0	1613.6	41.3	342.6	4.37	36.28
14.0-15.0	1539.7	42.3	384.9	4.48	40.76
15.0-16.0	1461.7	42.8	427.7	4.54	45.29
16.0-17.0	1377.3	42.9	470.6	4.54	49.84
17.0-18.0	1281.3	42.3	512.9	4.47	54.31
18.0-19.0	1178.6	41.0	553.9	4.34	58.65
19.0-20.0	1079.3	39.5	593.4	4.18	62.84
20.0-21.0	980.7	37.7	631.1	3.99	66.83
21.0-22.0	880.0	35.4	666.4	3.75	70.57
22.0-23.0	781.6	32.8	699.2	3.47	74.05
23.0-24.0	690.1	30.2	729.4	3.20	77.24
24.0-25.0	605.5	27.5	756.9	2.92	80.16
25.0-26.0	527.3	24.9	781.8	2.64	82.79
26.0-27.0	455.4	22.3	804.1	2.36	85.15
27.0-28.0	389.8	19.7	823.9	2.09	87.24
28.0-29.0	330.7	17.3	841.2	1.83	89.08
29.0-30.0	277.7	15.0	856.1	1.59	90.66
30.0-31.0	229.7	12.8	868.9	1.35	92.02
31.0-32.0	187.1	10.7	879.7	1.14	93.15
32.0-33.0	151.3	8.9	888.6	0.94	94.10
33.0-34.0	121.4	7.3	895.9	0.78	94.87
34.0-35.0	95.4	5.9	901.8	0.63	95.50
35.0-36.0	75.1	4.8	906.6	0.51	96.01

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	61.3	4.0	910.6	0.42	96.43
37.0-38.0	50.8	3.4	914.0	0.36	96.79
38.0-39.0	42.4	2.9	916.9	0.31	97.10
39.0-40.0	35.8	2.5	919.4	0.26	97.36
40.0-41.0	30.6	2.2	921.6	0.23	97.59
41.0-42.0	26.7	1.9	923.5	0.21	97.80
42.0-43.0	23.6	1.7	925.3	0.19	97.98
43.0-44.0	20.9	1.6	926.9	0.17	98.15
44.0-45.0	18.9	1.5	928.3	0.15	98.30
45.0-46.0	17.4	1.4	929.7	0.14	98.45
46.0-47.0	15.9	1.3	930.9	0.13	98.58
47.0-48.0	14.5	1.2	932.1	0.12	98.71
48.0-49.0	13.4	1.1	933.2	0.12	98.82
49.0-50.0	12.4	1.0	934.2	0.11	98.93
50.0-51.0	11.5	1.0	935.2	0.10	99.03
51.0-52.0	10.5	0.9	936.1	0.10	99.13
52.0-53.0	9.7	0.8	936.9	0.09	99.22
53.0-54.0	8.9	0.8	937.7	0.08	99.30
54.0-55.0	8.1	0.7	938.5	0.08	99.38
55.0-56.0	7.3	0.7	939.1	0.07	99.45
56.0-57.0	6.5	0.6	939.7	0.06	99.51
57.0-58.0	5.7	0.5	940.2	0.06	99.57
58.0-59.0	5.2	0.5	940.7	0.05	99.62
59.0-60.0	4.6	0.4	941.2	0.05	99.67
60.0-61.0	4.2	0.4	941.6	0.04	99.71
61.0-62.0	3.6	0.4	941.9	0.04	99.75
62.0-63.0	3.2	0.3	942.2	0.03	99.78
63.0-64.0	2.9	0.3	942.5	0.03	99.81
64.0-65.0	2.5	0.2	942.8	0.03	99.83
65.0-66.0	2.1	0.2	943.0	0.02	99.86
66.0-67.0	2.0	0.2	943.2	0.02	99.88
67.0-68.0	1.8	0.2	943.4	0.02	99.90
68.0-69.0	1.5	0.2	943.5	0.02	99.91
69.0-70.0	1.3	0.1	943.6	0.01	99.93
70.0-71.0	1.2	0.1	943.8	0.01	99.94
71.0-72.0	1.1	0.1	943.9	0.01	99.95

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.9	0.1	944.0	0.01	99.96
73.0-74.0	0.7	0.1	944.0	0.01	99.97
74.0-75.0	0.7	0.1	944.1	0.01	99.98
75.0-76.0	0.5	0.1	944.2	0.01	99.98
76.0-77.0	0.3	0.0	944.2	0.00	99.99
77.0-78.0	0.3	0.0	944.2	0.00	99.99
78.0-79.0	0.3	0.0	944.3	0.00	99.99
79.0-80.0	0.2	0.0	944.3	0.00	100.00
80.0-81.0	0.1	0.0	944.3	0.00	100.00
81.0-82.0	0.1	0.0	944.3	0.00	100.00
82.0-83.0	0.1	0.0	944.3	0.00	100.00
83.0-84.0	0.0	0.0	944.3	0.00	100.00
84.0-85.0	0.0	0.0	944.3	0.00	100.00
85.0-86.0	0.0	0.0	944.3	0.00	100.00
86.0-87.0	0.0	0.0	944.3	0.00	100.00
87.0-88.0	0.0	0.0	944.3	0.00	100.00
88.0-89.0	0.0	0.0	944.3	0.00	100.00
89.0-90.0	0.0	0.0	944.3	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	2075.4	2075.4								
G1.0	2057.9	2086.9								
G2.0	2035.9	2095.3								
G3.0	2009.9	2101.3								
G4.0	1978.6	2102.4								
G5.0	1940.7	2099.6								
G6.0	1898.3	2092.9								
G7.0	1851.5	2078.7								
G8.0	1795.5	2060.7								
G9.0	1733.9	2034.9								
G10.0	1668.0	2002.1								
G11.0	1594.1	1960.9								
G12.0	1519.2	1913.8								
G13.0	1441.2	1857.8								
G14.0	1362.1	1793.3								
G15.0	1280.4	1723.3								
G16.0	1197.5	1645.5								
G17.0	1105.2	1561.1								
G18.0	987.3	1471.7								
G19.0	879.0	1376.6								
G20.0	784.4	1277.1								
G21.0	699.8	1161.6								
G22.0	622.8	1035.7								
G23.0	549.8	918.3								
G24.0	482.2	810.2								
G25.0	419.4	710.1								
G26.0	361.4	618.1								
G27.0	307.9	534.4								
G28.0	258.6	458.4								
G29.0	215.5	390.2								
G30.0	177.4	327.4								
G31.0	142.3	271.6								
G32.0	111.0	223.6								
G33.0	90.6	179.8								
G34.0	75.3	139.7								
G35.0	61.3	105.2								
G36.0	49.9	83.9								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	41.2	70.0								
G38.0	34.0	58.2								
G39.0	28.8	48.7								
G40.0	25.0	40.7								
G41.0	22.1	34.5								
G42.0	20.3	29.9								
G43.0	18.4	25.9								
G44.0	16.8	22.6								
G45.0	15.4	20.8								
G46.0	14.2	19.2								
G47.0	13.2	16.8								
G48.0	12.2	15.8								
G49.0	11.1	14.4								
G50.0	10.8	13.2								
G51.0	9.8	12.2								
G52.0	8.9	11.1								
G53.0	8.1	10.5								
G54.0	7.2	9.8								
G55.0	6.5	8.9								
G56.0	5.7	8.2								
G57.0	5.2	6.9								
G58.0	4.5	6.5								
G59.0	4.1	5.7								
G60.0	3.8	5.0								
G61.0	3.4	4.5								
G62.0	2.8	4.0								
G63.0	2.6	3.6								
G64.0	2.2	3.1								
G65.0	1.9	2.8								
G66.0	1.5	2.4								
G67.0	1.7	2.2								
G68.0	1.4	1.9								
G69.0	1.0	1.7								
G70.0	1.2	1.4								
G71.0	0.9	1.4								
G72.0	0.9	1.2								
G73.0	0.5	0.9								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.5	0.9								
G75.0	0.5	0.9								
G76.0	0.2	0.5								
G77.0	0.2	0.5								
G78.0	0.2	0.5								
G79.0	0.2	0.3								
G80.0	0.0	0.2								
G81.0	0.0	0.2								
G82.0	0.0	0.3								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.218 m
Humidity:
Inspector: