Report No.: Test Time: 2026-04-10 14:36

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: 36D
Luminous Length (mm): -51
Luminous Width (mm): -51
Voltage: 229.4 V
Current: 0.083 A
Power: 10.80 W
Power Factor: 0.560


Photometric Results

CIE Class: Direct
Total Rated Lamp Lumens: 972.8 lm
Measurement Flux: 972.8 lm
Efficiency: 100%
Downward Ratio: 100%
Upward Ratio: 0%
Horizontal Diffuse Angle(50%): H39
Vertical Diffuse Angle(50%): V39
Luminaire Efficacy Rating (LER): 90.13
Central Intensity: 2328.97 cd
Max. Intensity: 2332.13 cd
Pos of Max. Intensity: H0 V1
S/MH(C0/C180): 0.64
S/MH(C90/C270): 0.64

Picture Of Luminaire





Luminous Intensity Distribution Curve

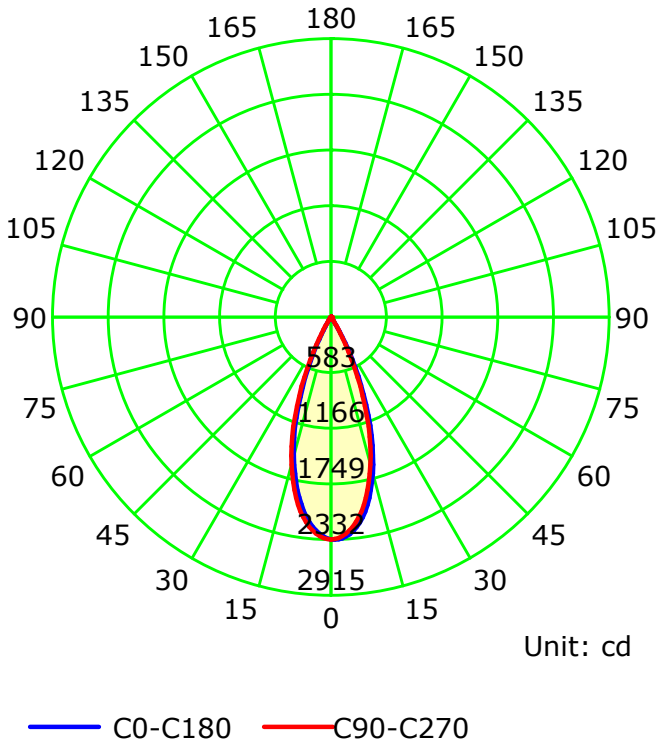

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Luminous Intensity Distribution Curve

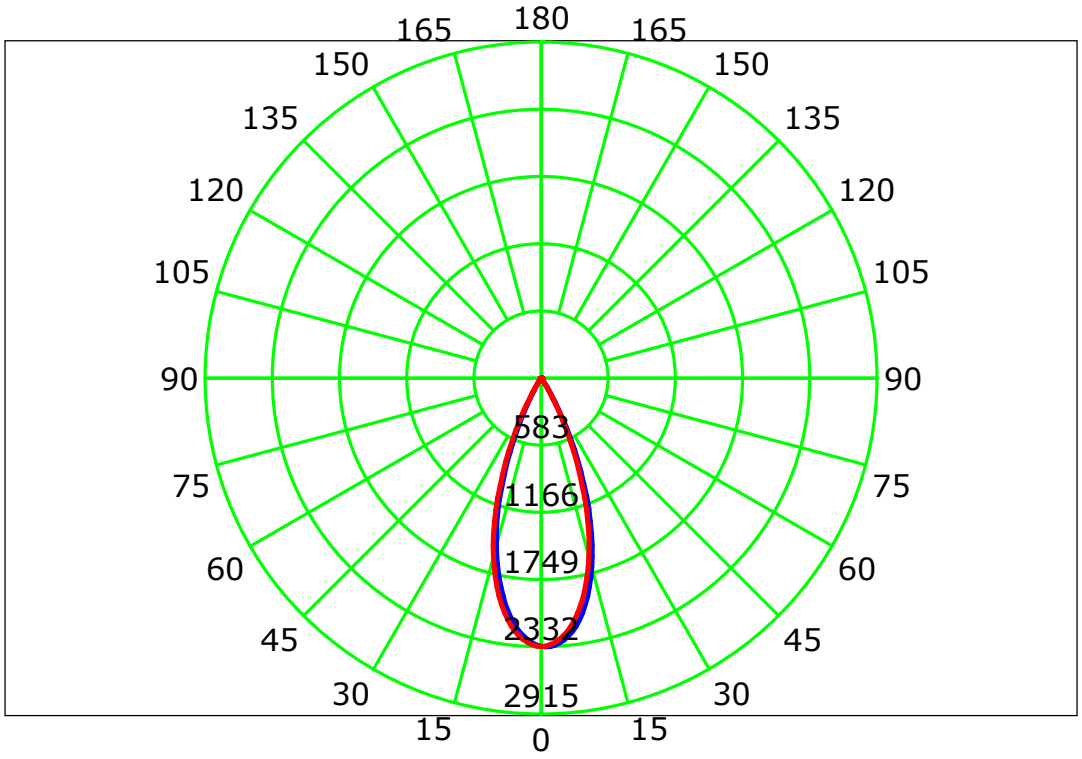


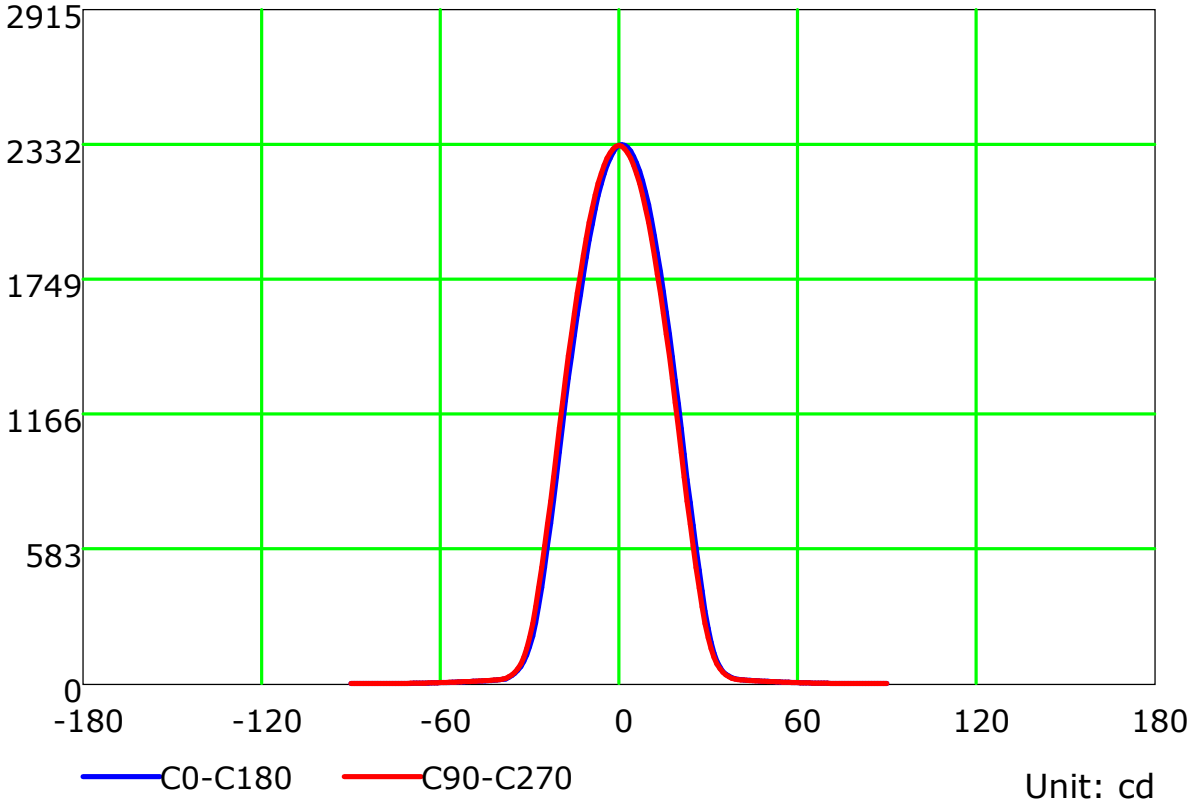

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

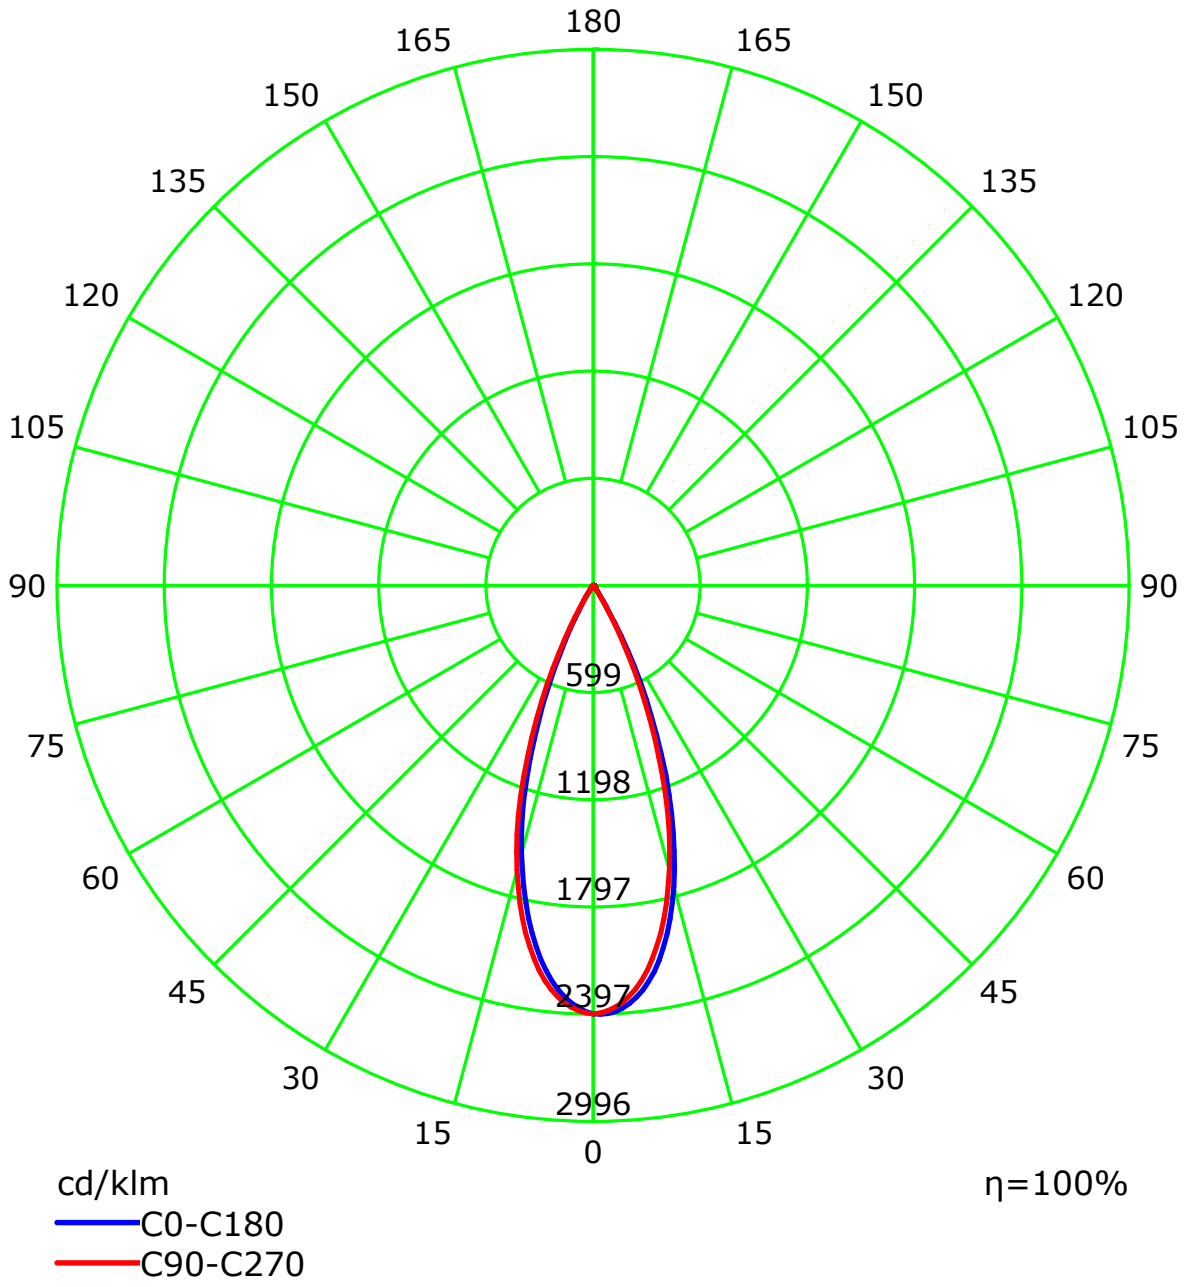

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

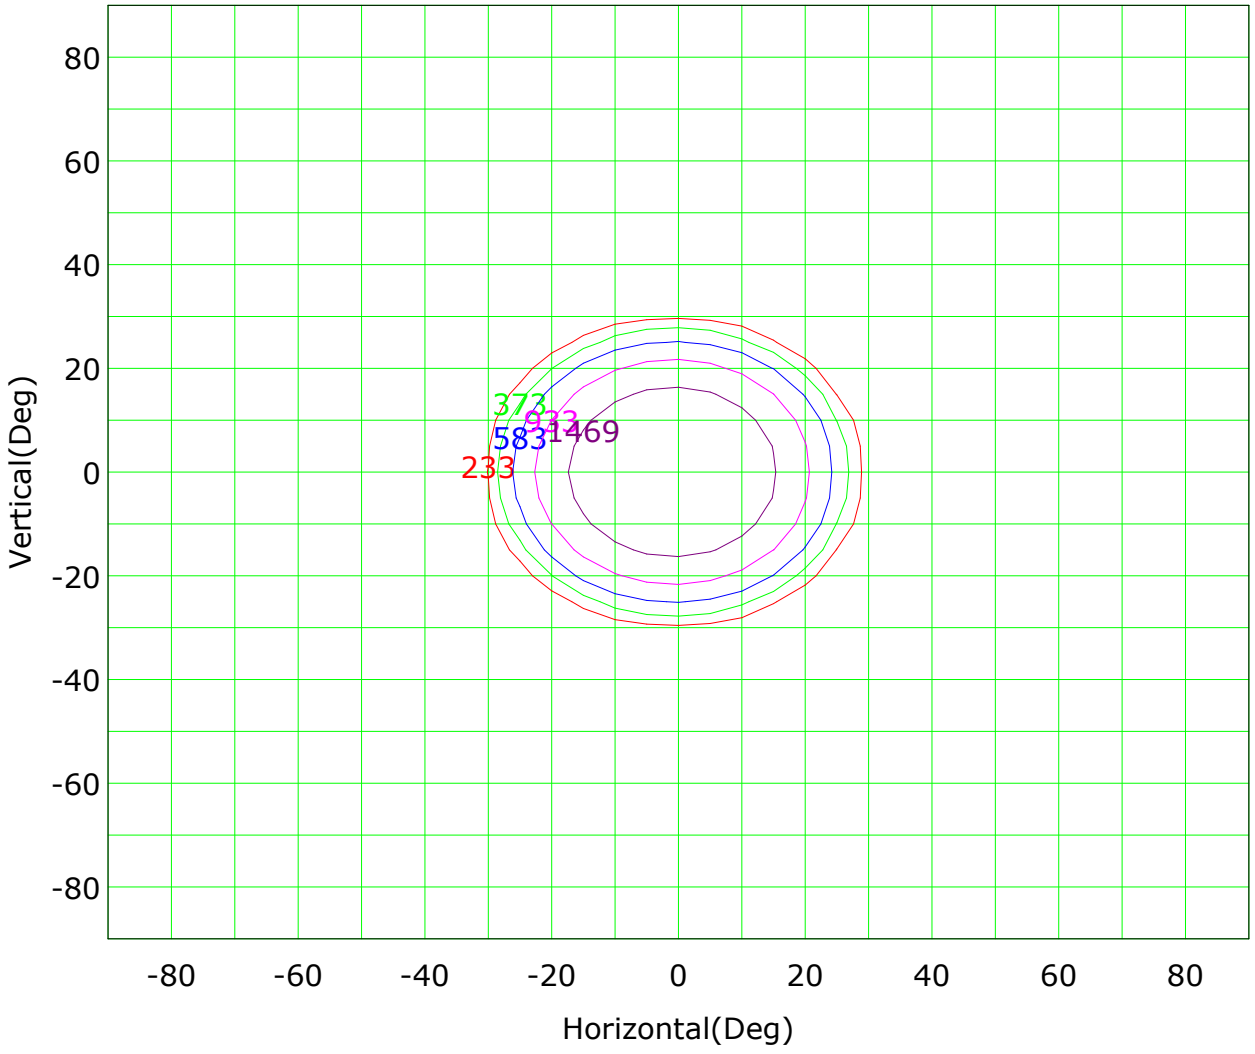


Imax (100%): 2332 cd

(10%): 233 cd
(16%): 373 cd
(25%): 583 cd
(40%): 933 cd
(63%): 1469 cd
(100%): 2332 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

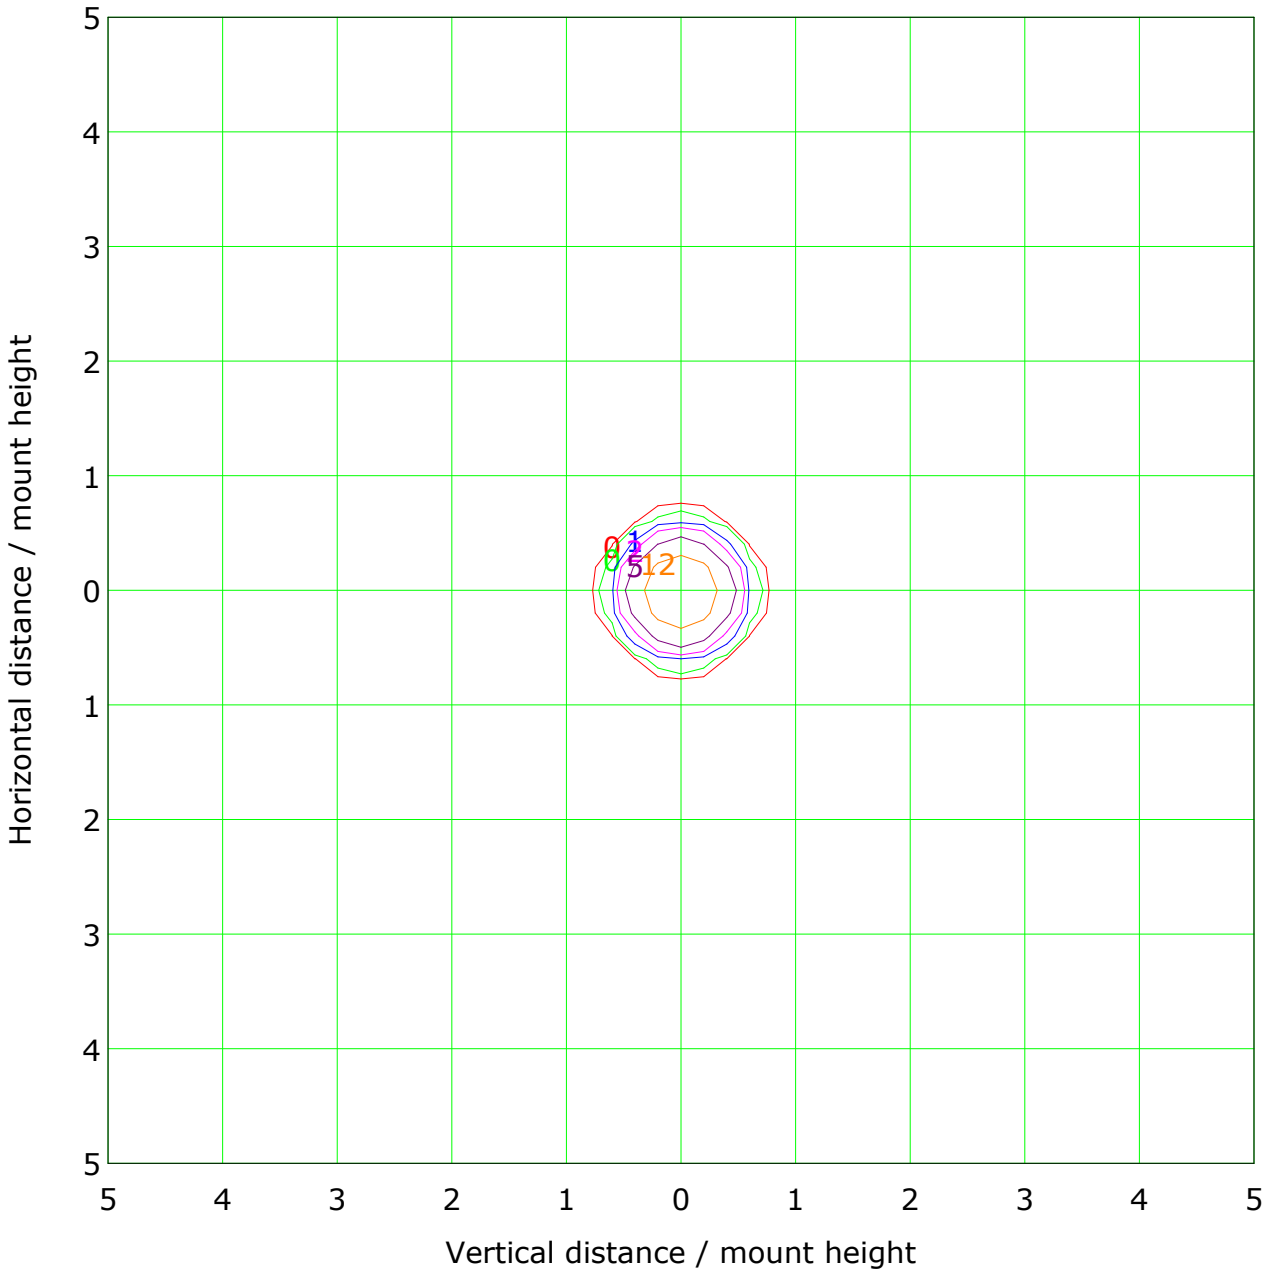


Mounting Height: 10.0m Max Lux(100%): 23.3 lx

(1%): 0.2 lx
(2%): 0.5 lx
(5%): 1.2 lx
(10%): 2.3 lx
(20%): 4.7 lx
(50%): 11.7 lx
(100%): 23.3 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	9315.88	0.35/0.35	0.1	4229.75
1.0	2328.97	0.71/0.71	0.4	1057.44
1.5	1035.10	1.06/1.06	0.9	469.97
2.0	582.24	1.41/1.41	1.6	264.36
2.5	372.64	1.77/1.77	2.5	169.19
3.0	258.77	2.12/2.12	3.5	117.49
4.0	145.56	2.83/2.83	6.3	66.09
5.0	93.16	3.54/3.53	9.8	42.30
15.0	10.35	10.61/10.60	88.5	4.70
20.0	5.82	14.15/14.14	157.4	2.64

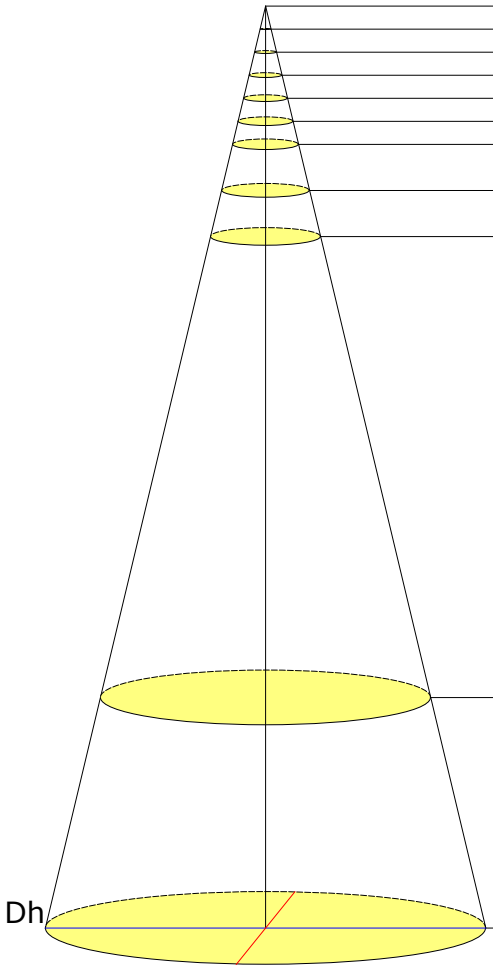


Beam Angle(B): H39.0 V38.9 Field Angle(F): H58.6 V58.9

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

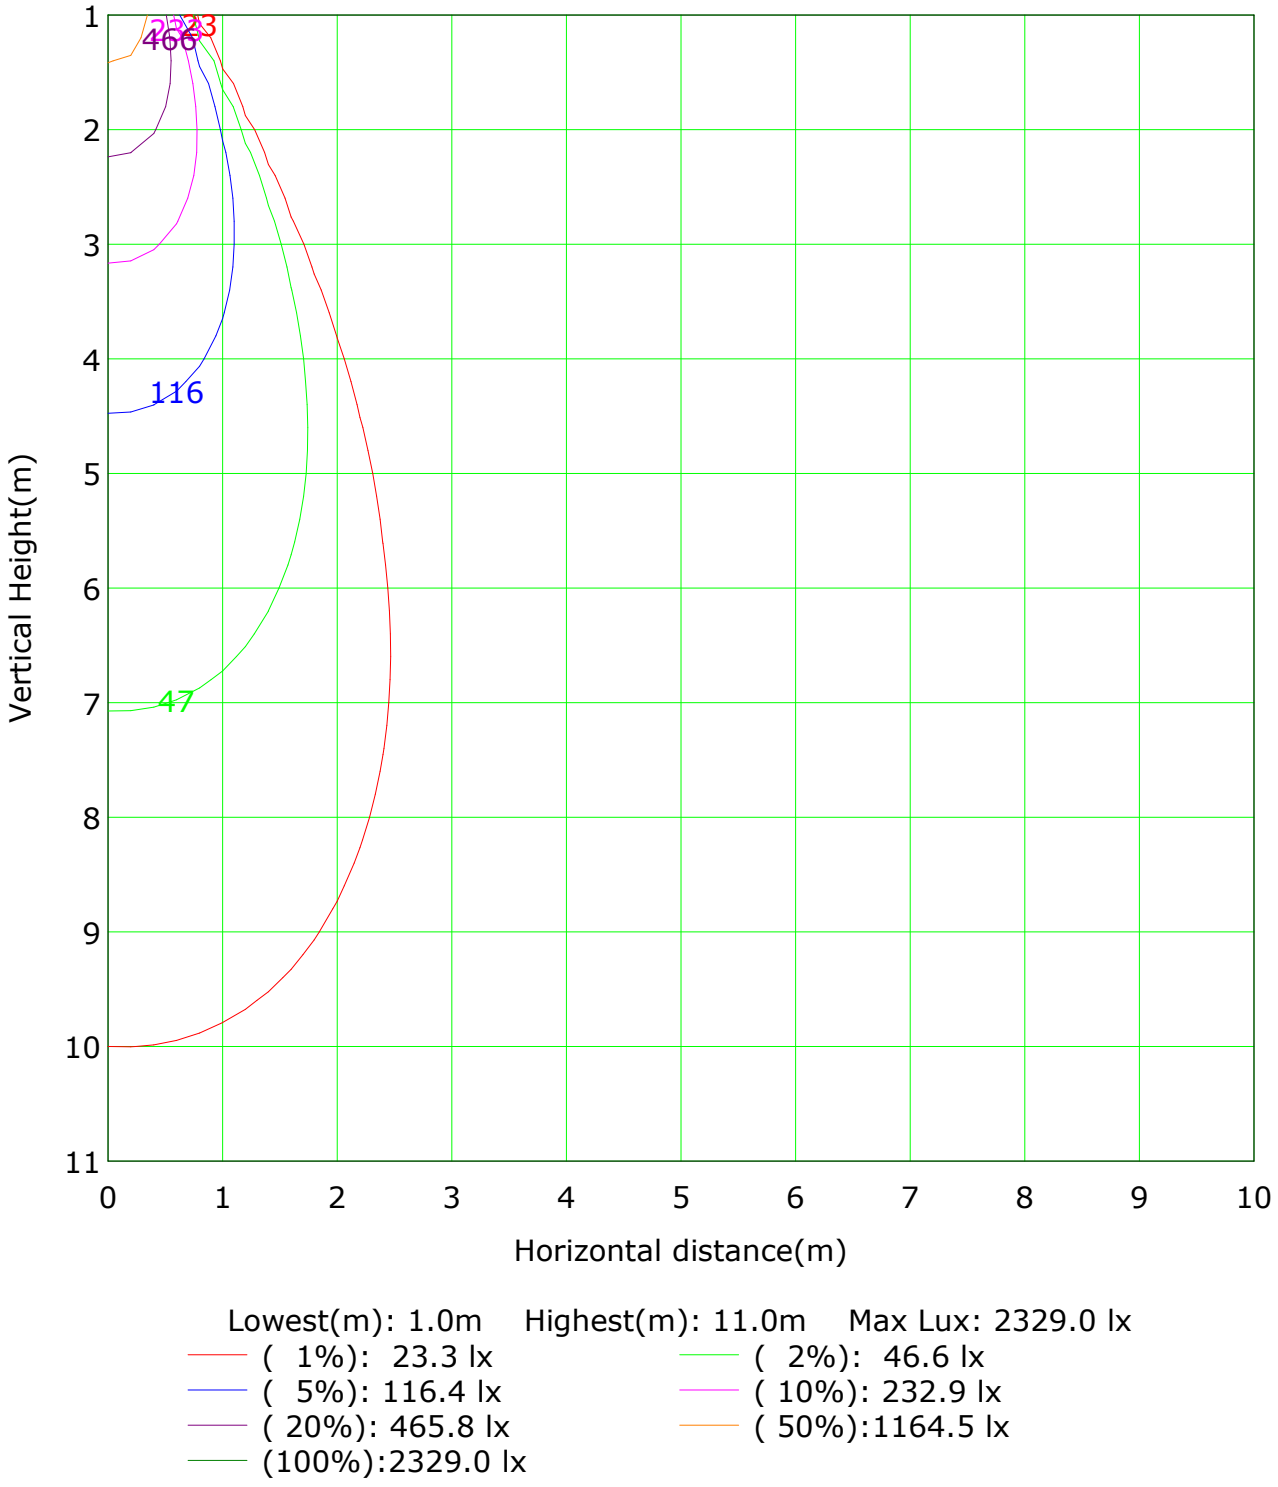

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 2329.0 lx

(1%): 23.3 lx
(2%): 46.6 lx
(5%): 116.4 lx
(10%): 232.9 lx
(20%): 465.8 lx
(50%):1164.5 lx
(100%):2329.0 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table


Unit: lm

Horizontal plane	Vertical plane																									
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0	2.1	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.4	0.8	0.4	0.3	0.2	0.1	0.0	0.0	0.0	0.0	6.2	0.0
-30	0.0	0.0	0.0	0.0	0.1	0.1	0.3	0.4	0.8	1.4	1.4	0.8	0.4	0.3	0.2	0.1	0.0	0.0	0.0	47.2	36.3
-20	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.4	1.0	1.8	8.2	7.3	1.8	1.0	0.4	0.3	0.2	0.1	0.0	157.4	150.3
-10	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.4	1.8	1.9	16.6	17.2	9.3	1.8	0.5	0.3	0.2	0.1	0.0	253.2	246.5
0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.4	1.9	1.9	17.2	45.7	30.1	9.3	2.1	0.4	0.2	0.1	0.0	260.4	253.7
10	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.4	1.0	1.0	9.3	30.1	46.1	64.7	45.7	30.1	9.3	2.1	0.4	174.3	167.6
20	0.0	0.0	0.0	0.0	0.1	0.1	0.3	0.5	0.5	2.1	9.3	17.5	46.1	64.7	62.9	46.1	17.5	9.3	2.1	59.6	50.3
30	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.3	0.4	0.9	1.8	1.8	17.5	46.1	62.9	64.7	46.1	17.5	9.3	7.4	0.0
40	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.3	0.3	0.3	1.8	9.3	30.1	46.1	64.7	62.9	44.6	2.2	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.2	0.2	0.1	0.3	1.8	9.3	30.1	45.7	64.7	62.9	1.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.3	1.8	9.3	30.1	45.7	44.6	0.3	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	1.8	9.3	30.1	45.7	0.1	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	1.8	9.3	30.1	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	1.8	9.3	0.0	0.0
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

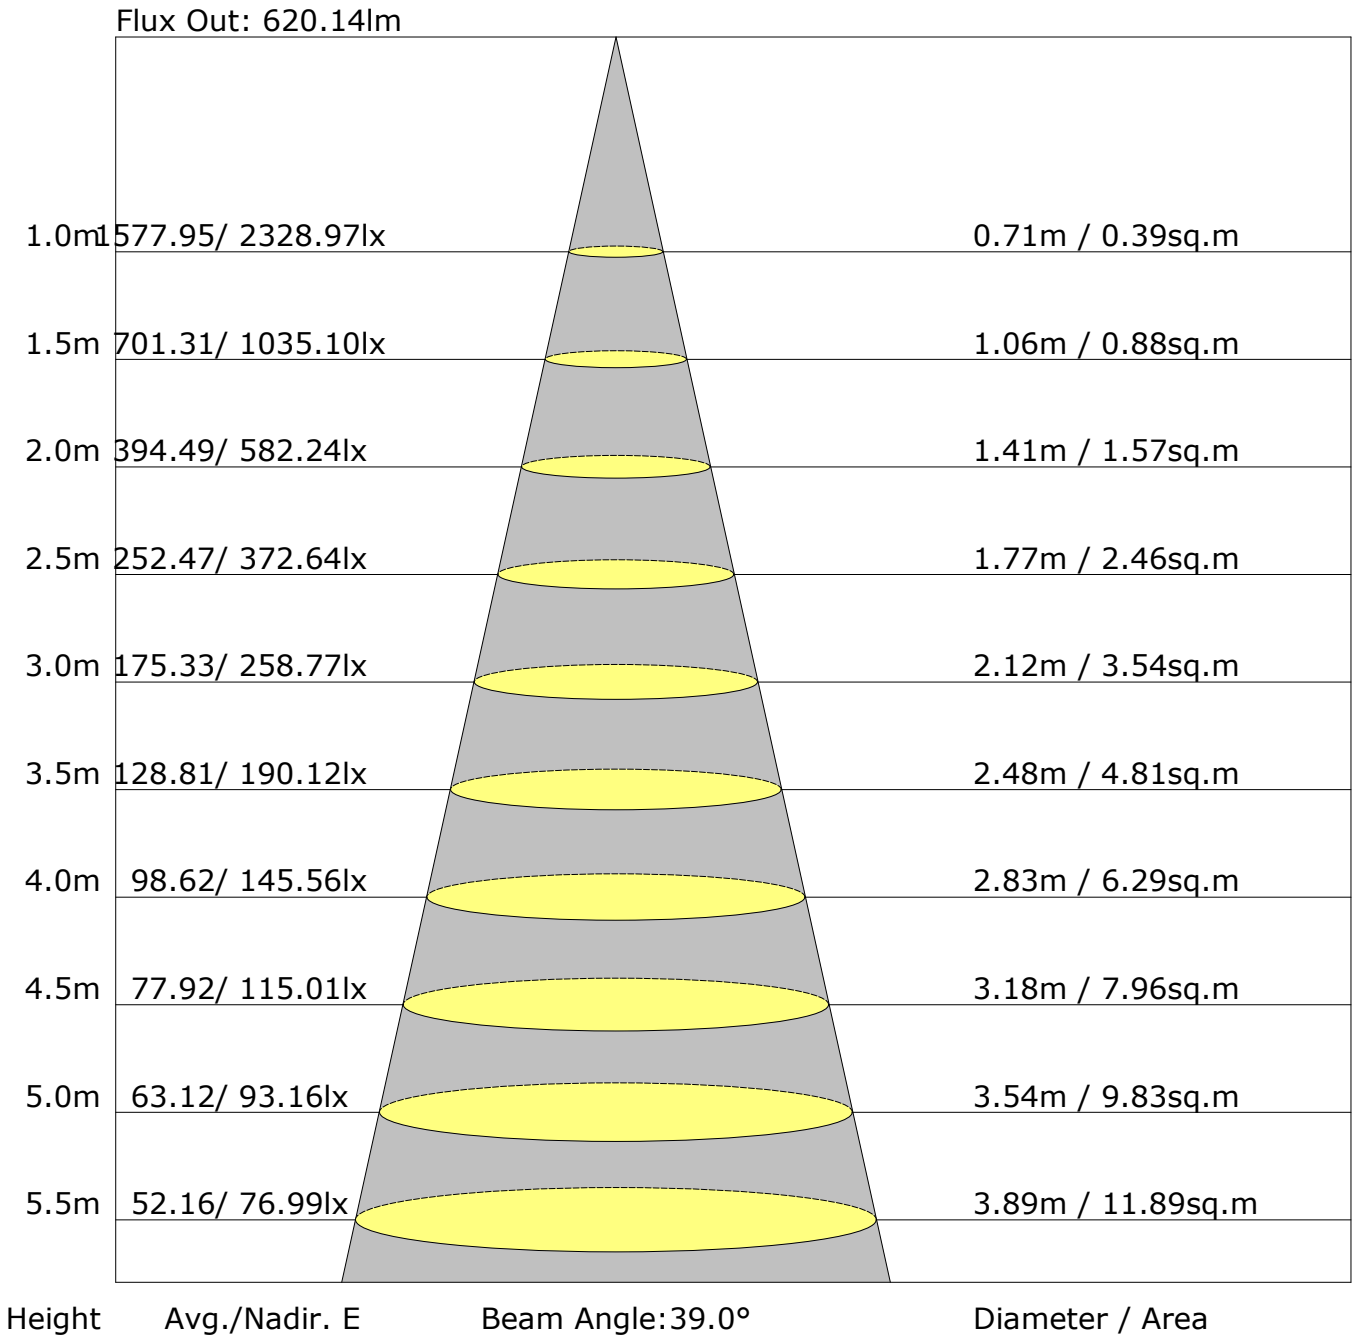

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	11.9	12.5	12.1	12.7	12.9	11.4	12.1	11.6	12.2	12.4
3H	11.9	12.5	12.2	12.7	13.0	11.4	12.0	11.7	12.3	12.5
4H	11.9	12.4	12.2	12.7	13.0	11.4	12.0	11.7	12.2	12.5
6H	11.8	12.3	12.1	12.6	12.9	11.3	11.9	11.6	12.1	12.4
8H	11.8	12.3	12.1	12.6	12.9	11.3	11.8	11.6	12.1	12.4
12H	11.7	12.2	12.1	12.5	12.9	11.2	11.8	11.6	12.1	12.4
X=4H Y=2H	11.8	12.4	12.1	12.6	12.9	11.3	11.9	11.6	12.2	12.4
3H	11.8	12.3	12.2	12.6	13.0	11.4	11.9	11.7	12.2	12.5
4H	11.8	12.3	12.2	12.6	13.0	11.4	11.8	11.7	12.2	12.5
6H	11.8	12.2	12.2	12.5	12.9	11.3	11.7	11.7	12.1	12.5
8H	11.7	12.1	12.2	12.5	12.9	11.3	11.6	11.7	12.0	12.4
12H	11.7	12.0	12.1	12.4	12.9	11.2	11.6	11.7	12.0	12.4
X=8H Y=4H	11.7	12.1	12.2	12.5	12.9	11.3	11.6	11.7	12.0	12.4
6H	11.7	12.0	12.1	12.4	12.9	11.2	11.5	11.7	11.9	12.4
8H	11.7	11.9	12.1	12.4	12.8	11.2	11.5	11.7	11.9	12.4
12H	11.6	11.9	12.1	12.3	12.8	11.2	11.4	11.6	11.9	12.3
X=12H Y=4H	11.7	12.0	12.1	12.4	12.9	11.2	11.6	11.7	12.0	12.4
6H	11.6	11.9	12.1	12.3	12.8	11.2	11.4	11.7	11.9	12.4
8H	11.6	11.8	12.1	12.3	12.8	11.2	11.4	11.6	11.8	12.3
Variations with the observer position at spacings:										
S=1.0H	+5.2/-3.8					+5.0/-3.6				
S=1.5H	+7.9/-5.2					+7.6/-5.0				
S=2.0H	+9.8/-6.8					+9.6/-6.6				

Calculate in accordance with CIE Pub.117. The table is revised with 973lm (8log(F/F0) = -0.1).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

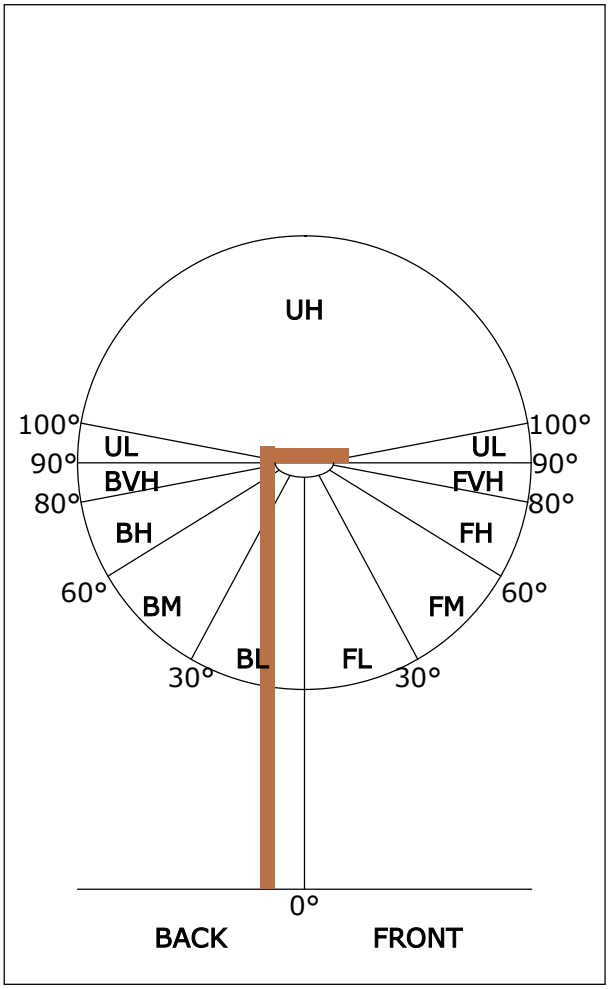

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	505	51.9
FL (0°-30°)	473	48.7
FM (30°-60°)	30	3.1
FH (60°-80°)	2	0.2
FVH (80°-90°)	0	0.0
BACK LIGHT	467	48.1
BL (0°-30°)	439	45.1
BM (30°-60°)	27	2.8
BH (60°-80°)	2	0.2
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2326.8	2.2	2.2	0.23	0.23
1.0-2.0	2319.2	6.7	8.9	0.68	0.91
2.0-3.0	2305.1	11.0	19.9	1.13	2.05
3.0-4.0	2285.0	15.3	35.2	1.57	3.62
4.0-5.0	2258.4	19.4	54.6	2.00	5.62
5.0-6.0	2225.1	23.4	78.0	2.40	8.02
6.0-7.0	2185.4	27.1	105.2	2.79	10.81
7.0-8.0	2138.8	30.6	135.8	3.15	13.96
8.0-9.0	2085.4	33.8	169.6	3.47	17.43
9.0-10.0	2025.8	36.7	206.2	3.77	21.20
10.0-11.0	1959.9	39.2	245.4	4.03	25.23
11.0-12.0	1888.6	41.3	286.7	4.24	29.47
12.0-13.0	1811.9	43.0	329.7	4.42	33.89
13.0-14.0	1730.4	44.3	374.0	4.55	38.44
14.0-15.0	1645.2	45.2	419.2	4.64	43.09
15.0-16.0	1556.6	45.6	464.8	4.69	47.78
16.0-17.0	1464.1	45.6	510.4	4.69	52.46
17.0-18.0	1368.1	45.1	555.5	4.64	57.10
18.0-19.0	1267.2	44.1	599.6	4.53	61.63
19.0-20.0	1160.5	42.5	642.1	4.37	66.00
20.0-21.0	1052.7	40.4	682.5	4.16	70.16
21.0-22.0	946.1	38.0	720.5	3.91	74.07
22.0-23.0	841.0	35.3	755.8	3.63	77.69
23.0-24.0	739.8	32.4	788.2	3.33	81.02
24.0-25.0	642.6	29.2	817.4	3.00	84.02
25.0-26.0	548.3	25.9	843.3	2.66	86.68
26.0-27.0	457.4	22.4	865.7	2.30	88.98
27.0-28.0	372.6	18.9	884.5	1.94	90.92
28.0-29.0	295.9	15.5	900.0	1.59	92.52
29.0-30.0	229.4	12.4	912.4	1.27	93.79
30.0-31.0	175.3	9.8	922.2	1.00	94.79
31.0-32.0	132.6	7.6	929.8	0.78	95.57
32.0-33.0	99.7	5.9	935.6	0.60	96.18
33.0-34.0	74.8	4.5	940.2	0.47	96.64
34.0-35.0	56.3	3.5	943.7	0.36	97.00
35.0-36.0	43.2	2.7	946.4	0.28	97.28

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	33.8	2.2	948.6	0.23	97.51
37.0-38.0	26.6	1.8	950.4	0.18	97.69
38.0-39.0	21.6	1.5	951.9	0.15	97.84
39.0-40.0	18.8	1.3	953.2	0.13	97.98
40.0-41.0	17.0	1.2	954.4	0.12	98.10
41.0-42.0	15.8	1.2	955.5	0.12	98.22
42.0-43.0	14.7	1.1	956.6	0.11	98.33
43.0-44.0	13.9	1.0	957.7	0.11	98.44
44.0-45.0	13.1	1.0	958.7	0.10	98.55
45.0-46.0	12.4	1.0	959.7	0.10	98.65
46.0-47.0	11.7	0.9	960.6	0.10	98.74
47.0-48.0	11.0	0.9	961.5	0.09	98.83
48.0-49.0	10.4	0.9	962.3	0.09	98.92
49.0-50.0	9.8	0.8	963.1	0.08	99.01
50.0-51.0	9.3	0.8	963.9	0.08	99.09
51.0-52.0	8.7	0.7	964.7	0.08	99.16
52.0-53.0	8.1	0.7	965.4	0.07	99.24
53.0-54.0	7.6	0.7	966.1	0.07	99.30
54.0-55.0	6.9	0.6	966.7	0.06	99.37
55.0-56.0	6.4	0.6	967.3	0.06	99.43
56.0-57.0	5.9	0.5	967.8	0.06	99.48
57.0-58.0	5.4	0.5	968.3	0.05	99.53
58.0-59.0	4.8	0.5	968.7	0.05	99.58
59.0-60.0	4.5	0.4	969.2	0.04	99.62
60.0-61.0	4.0	0.4	969.6	0.04	99.66
61.0-62.0	3.6	0.4	969.9	0.04	99.70
62.0-63.0	3.4	0.3	970.2	0.03	99.73
63.0-64.0	3.1	0.3	970.5	0.03	99.77
64.0-65.0	2.7	0.3	970.8	0.03	99.79
65.0-66.0	2.4	0.2	971.1	0.03	99.82
66.0-67.0	2.2	0.2	971.3	0.02	99.84
67.0-68.0	2.0	0.2	971.5	0.02	99.86
68.0-69.0	1.8	0.2	971.7	0.02	99.88
69.0-70.0	1.5	0.2	971.8	0.02	99.90
70.0-71.0	1.4	0.1	972.0	0.01	99.91
71.0-72.0	1.2	0.1	972.1	0.01	99.92

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1.2	0.1	972.2	0.01	99.94
73.0-74.0	1.0	0.1	972.3	0.01	99.95
74.0-75.0	0.9	0.1	972.4	0.01	99.96
75.0-76.0	0.8	0.1	972.5	0.01	99.97
76.0-77.0	0.6	0.1	972.6	0.01	99.97
77.0-78.0	0.5	0.1	972.6	0.01	99.98
78.0-79.0	0.4	0.0	972.7	0.00	99.98
79.0-80.0	0.3	0.0	972.7	0.00	99.99
80.0-81.0	0.3	0.0	972.7	0.00	99.99
81.0-82.0	0.2	0.0	972.7	0.00	99.99
82.0-83.0	0.2	0.0	972.8	0.00	99.99
83.0-84.0	0.2	0.0	972.8	0.00	100.00
84.0-85.0	0.1	0.0	972.8	0.00	100.00
85.0-86.0	0.1	0.0	972.8	0.00	100.00
86.0-87.0	0.0	0.0	972.8	0.00	100.00
87.0-88.0	0.1	0.0	972.8	0.00	100.00
88.0-89.0	0.1	0.0	972.8	0.00	100.00
89.0-90.0	0.0	0.0	972.8	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	2329.0	2329.0								
G1.0	2332.1	2317.1								
G2.0	2329.3	2298.2								
G3.0	2319.8	2273.0								
G4.0	2304.1	2243.1								
G5.0	2280.8	2205.6								
G6.0	2251.9	2162.0								
G7.0	2216.8	2111.0								
G8.0	2174.9	2052.4								
G9.0	2126.4	1988.0								
G10.0	2070.4	1918.2								
G11.0	2006.6	1844.3								
G12.0	1937.4	1765.9								
G13.0	1861.7	1682.5								
G14.0	1781.1	1596.3								
G15.0	1696.1	1507.4								
G16.0	1606.9	1416.0								
G17.0	1511.5	1322.1								
G18.0	1413.4	1225.4								
G19.0	1312.7	1117.2								
G20.0	1209.5	1002.6								
G21.0	1102.9	895.7								
G22.0	992.6	793.3								
G23.0	883.0	695.0								
G24.0	782.5	598.8								
G25.0	684.9	504.3								
G26.0	587.7	416.3								
G27.0	491.6	334.2								
G28.0	400.7	263.8								
G29.0	313.8	205.4								
G30.0	238.9	159.8								
G31.0	179.0	123.4								
G32.0	132.3	95.9								
G33.0	97.0	73.7								
G34.0	71.3	57.0								
G35.0	52.1	44.9								
G36.0	40.8	34.8								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	32.4	27.0								
G38.0	26.3	20.6								
G39.0	21.6	18.0								
G40.0	18.8	16.7								
G41.0	17.1	15.6								
G42.0	15.9	14.7								
G43.0	14.7	13.7								
G44.0	14.1	13.1								
G45.0	13.2	12.2								
G46.0	12.6	11.6								
G47.0	11.9	11.0								
G48.0	11.0	10.4								
G49.0	10.4	9.8								
G50.0	9.8	9.3								
G51.0	9.5	8.6								
G52.0	8.6	8.1								
G53.0	8.3	7.7								
G54.0	7.5	7.1								
G55.0	6.9	6.3								
G56.0	6.3	6.0								
G57.0	5.9	5.4								
G58.0	5.4	4.8								
G59.0	4.8	4.3								
G60.0	4.5	4.2								
G61.0	3.9	3.6								
G62.0	3.6	3.5								
G63.0	3.5	3.2								
G64.0	3.2	2.7								
G65.0	2.7	2.4								
G66.0	2.4	2.3								
G67.0	2.3	2.0								
G68.0	2.0	2.0								
G69.0	1.6	1.5								
G70.0	1.6	1.4								
G71.0	1.4	1.2								
G72.0	1.2	1.2								
G73.0	1.2	1.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	1.0	0.8								
G75.0	1.0	0.8								
G76.0	0.8	0.4								
G77.0	0.8	0.4								
G78.0	0.4	0.4								
G79.0	0.4	0.2								
G80.0	0.4	0.2								
G81.0	0.3	0.2								
G82.0	0.2	0.2								
G83.0	0.3	0.3								
G84.0	0.2	0.0								
G85.0	0.3	0.0								
G86.0	0.2	0.0								
G87.0	0.0	0.0								
G88.0	0.3	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: