中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.: Test Time: 2026-09-11 17:35

Luminaire Property


Luminaire Manufacturer:
Luminaire Description: LITE-55-15D
Luminous Length (mm): -51
Luminous Width (mm): -51
Voltage: 229.7 V
Current: 0.068 A
Power: 15.10 W
Power Factor: 0.961

Photometric Results

CIE Class: Direct
Total Rated Lamp Lumens: 1191.0 lm
Measurement Flux: 1191 lm
Efficiency: 100%
Downward Ratio: 100%
Upward Ratio: 0%
Horizontal Diffuse Angle(50%): H23.2
Vertical Diffuse Angle(50%): V23.2
Luminaire Efficacy Rating (LER): 78.93
Central Intensity: 5908.5 cd
Max. Intensity: 5908.5 cd
Pos of Max. Intensity: H0 V0
S/MH(C0/C180): 0.40
S/MH(C90/C270): 0.40


Picture Of Luminaire


Luminous Intensity Distribution Curve

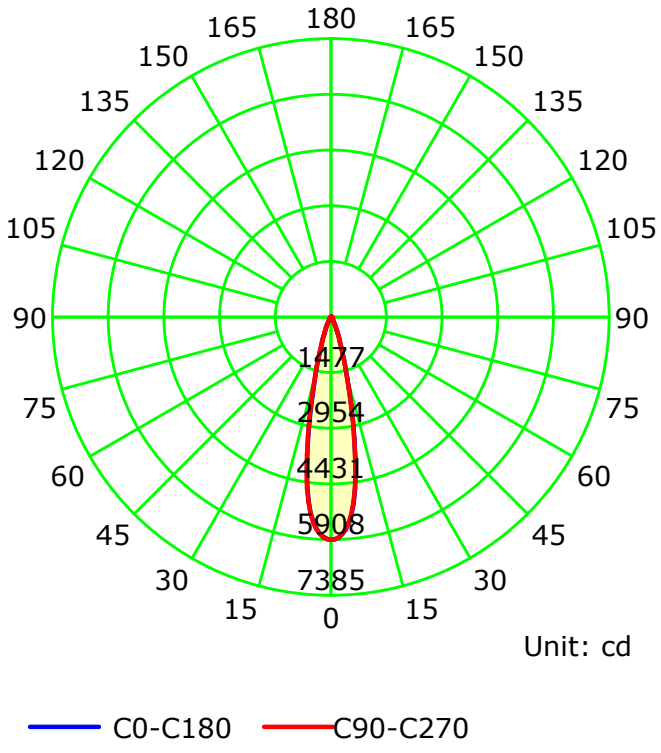

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Luminous Intensity Distribution Curve

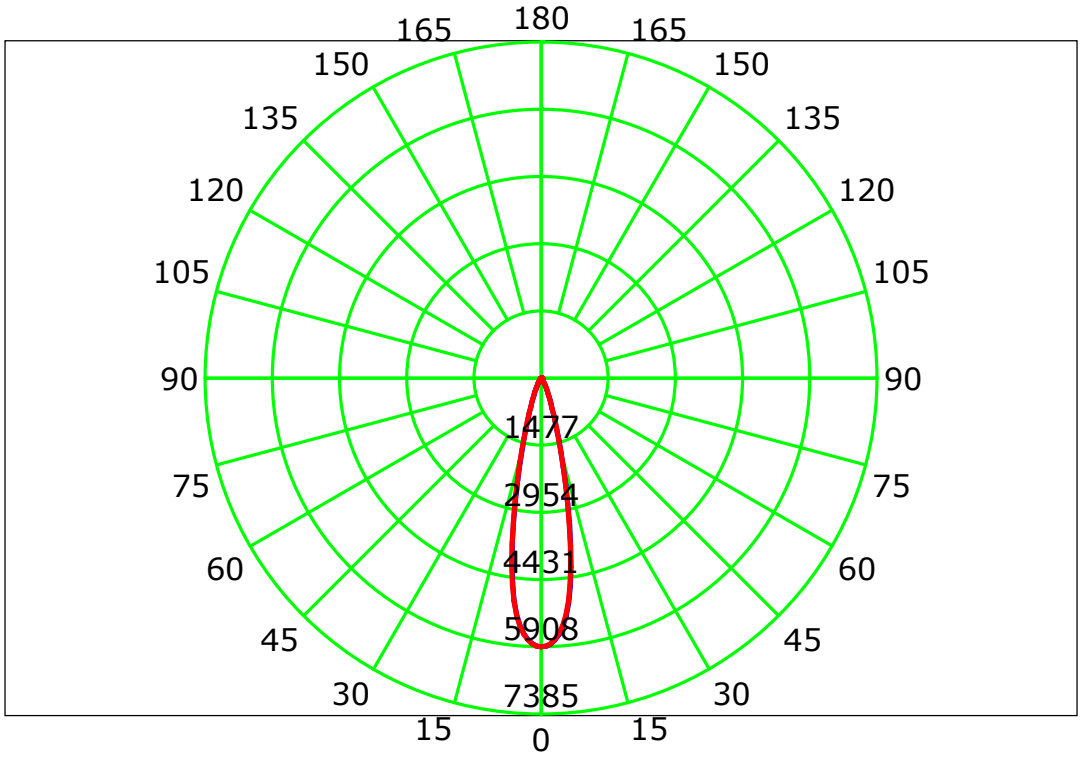


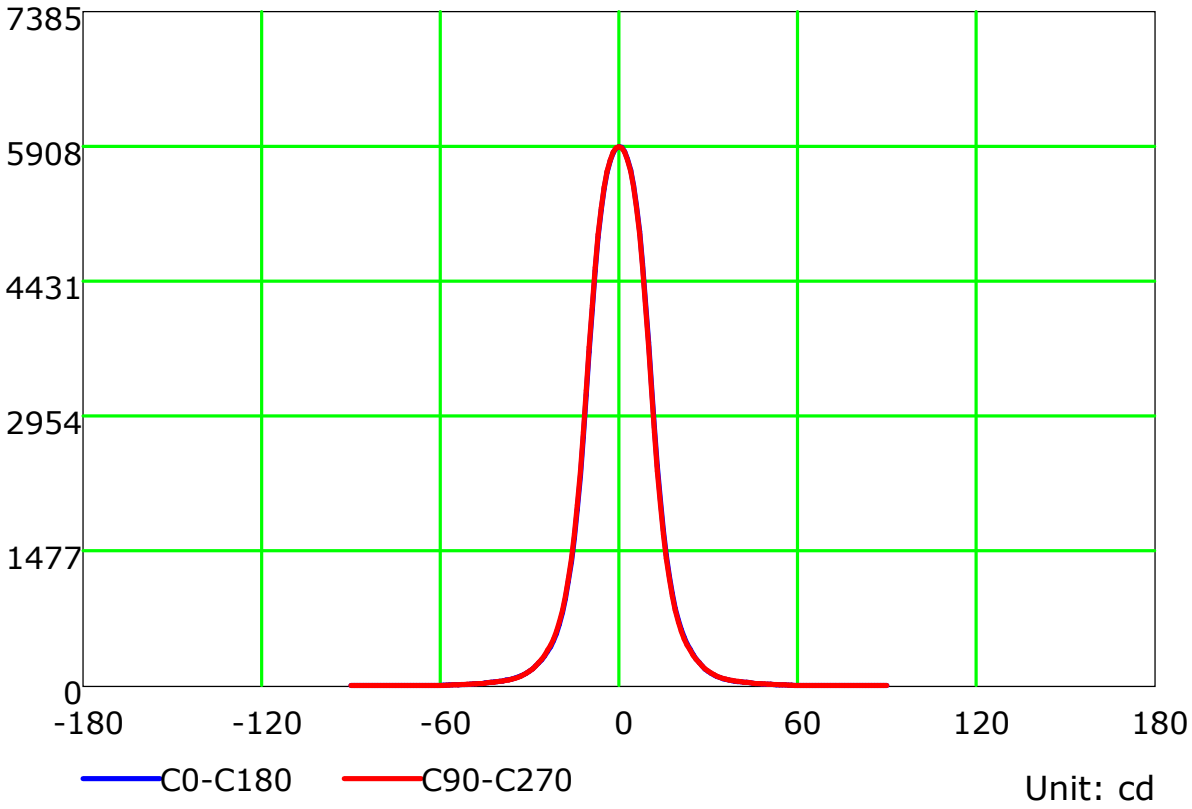

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

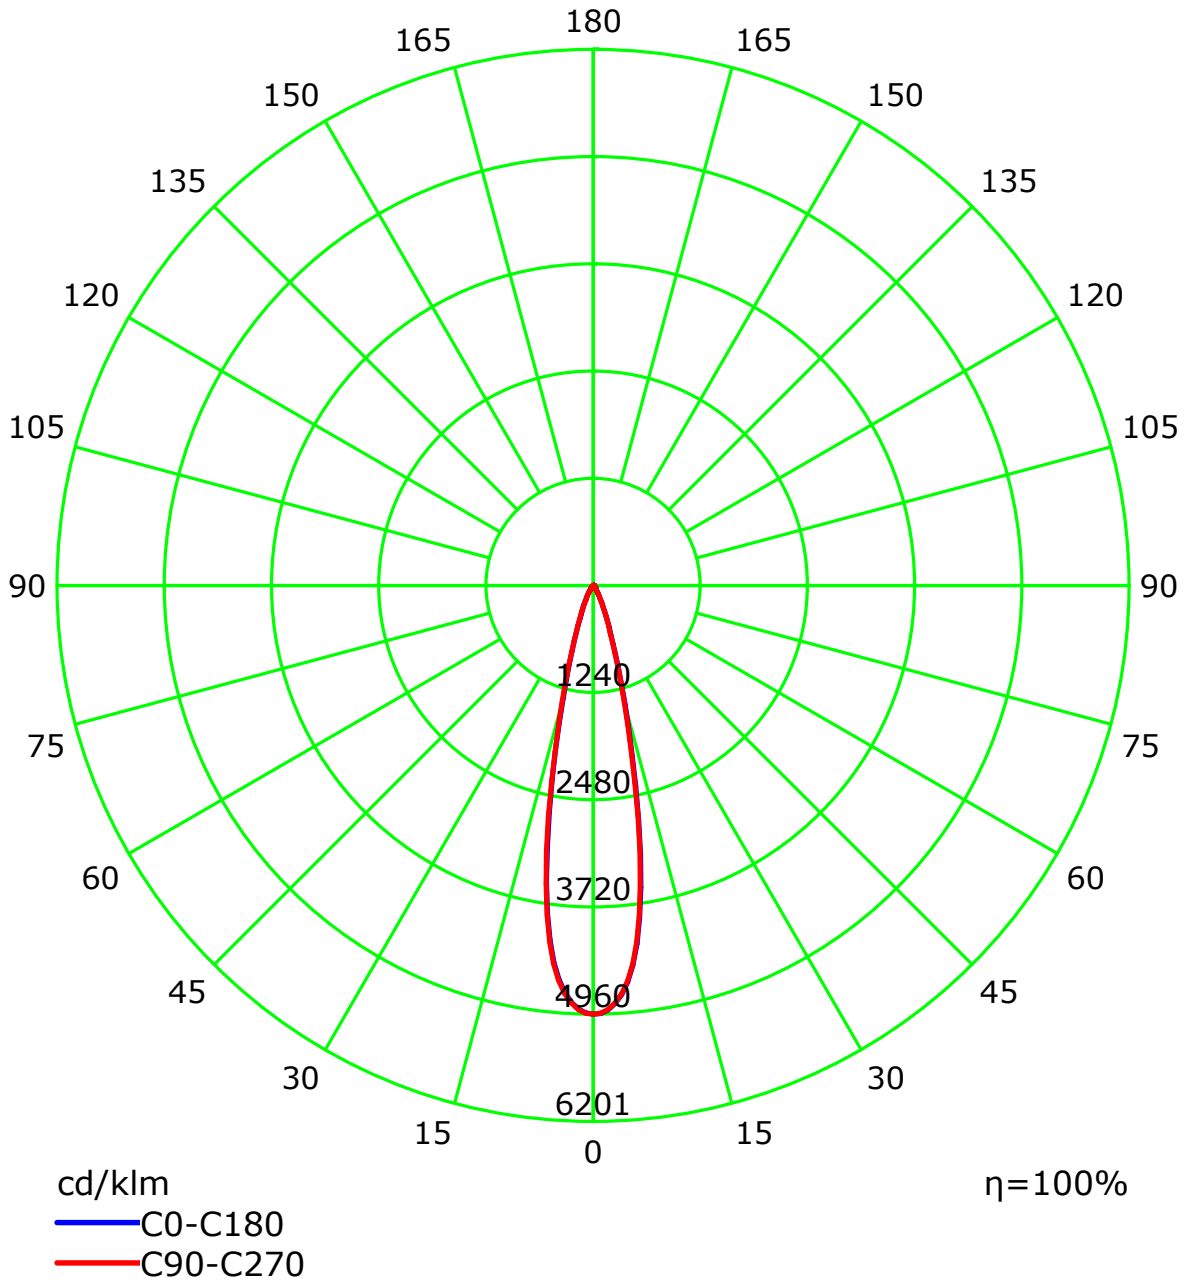

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

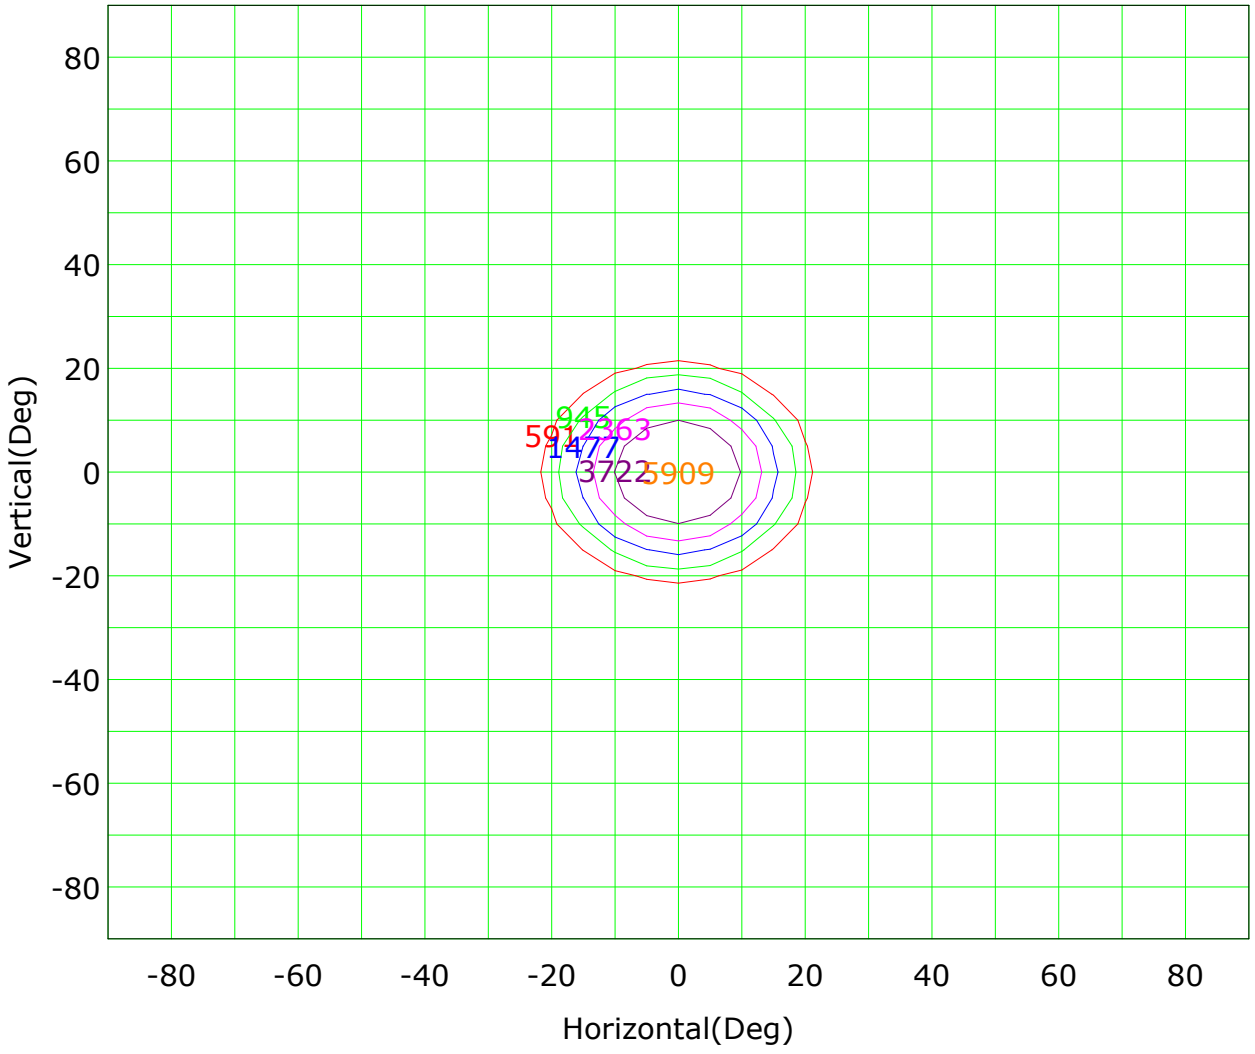


Imax (100%): 5909 cd

(10%): 591 cd
(16%): 945 cd
(25%): 1477 cd
(40%): 2363 cd
(63%): 3722 cd
(100%): 5909 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

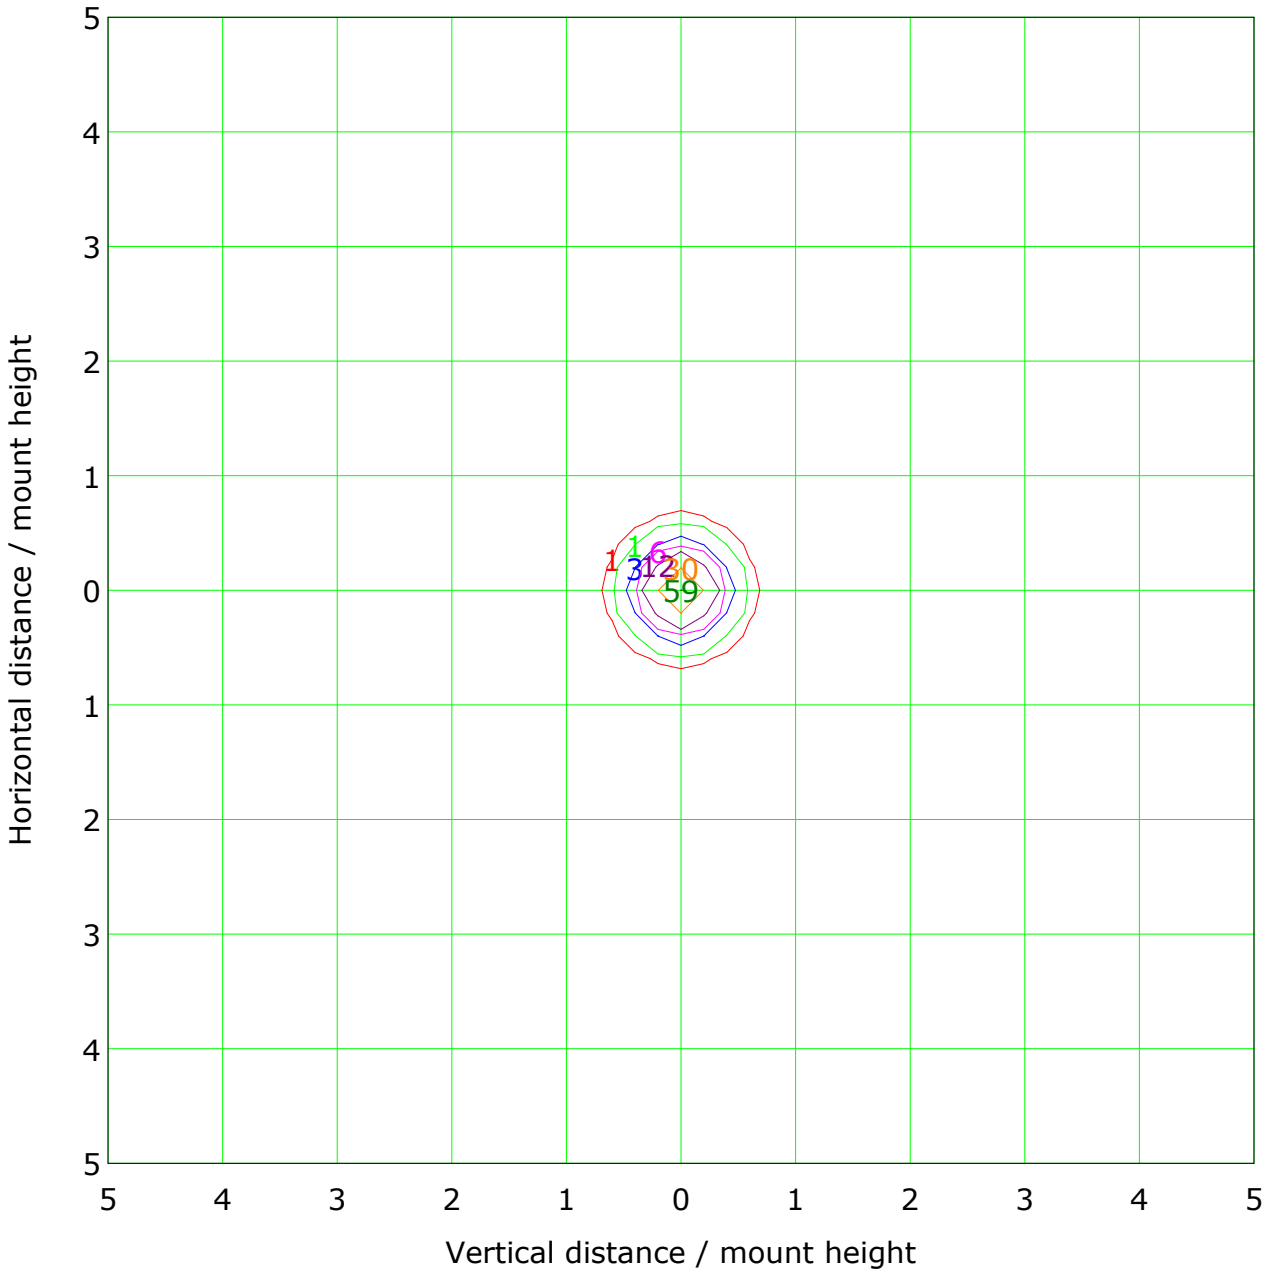


Mounting Height: 10.0m Max Lux(100%): 59.1 lx

(1%): 0.6 lx
(2%): 1.2 lx
(5%): 3.0 lx
(10%): 5.9 lx
(20%): 11.8 lx
(50%): 29.5 lx
(100%): 59.1 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

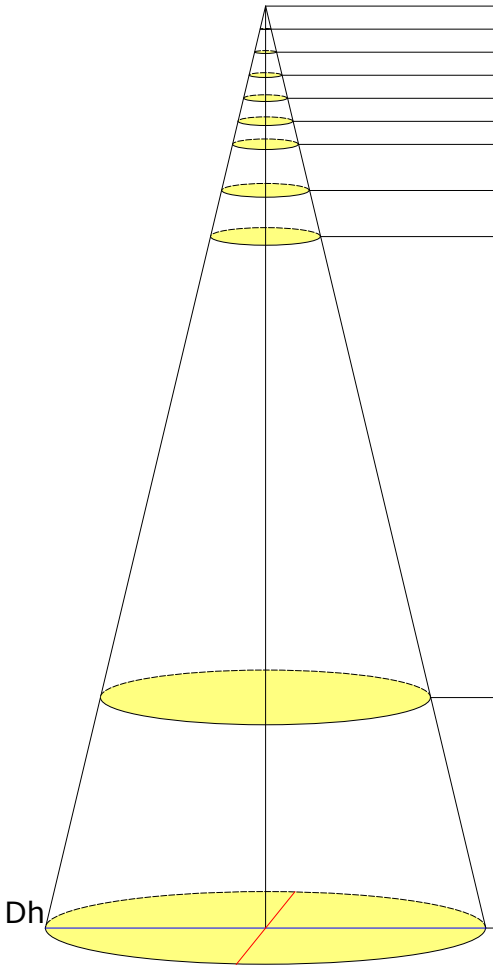


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	23634.00	0.21/0.21	0.0	11417.12
1.0	5908.50	0.41/0.41	0.1	2854.28
1.5	2626.00	0.62/0.62	0.3	1268.57
2.0	1477.13	0.82/0.82	0.5	713.57
2.5	945.36	1.03/1.03	0.8	456.68
3.0	656.50	1.23/1.23	1.2	317.14
4.0	369.28	1.64/1.64	2.1	178.39
5.0	236.34	2.06/2.06	3.3	114.17
15.0	26.26	6.17/6.17	29.9	12.69
20.0	14.77	8.22/8.22	53.1	7.14

Beam Angle(B): H23.2 V23.2 Field Angle(F): H42.1 V42.1

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

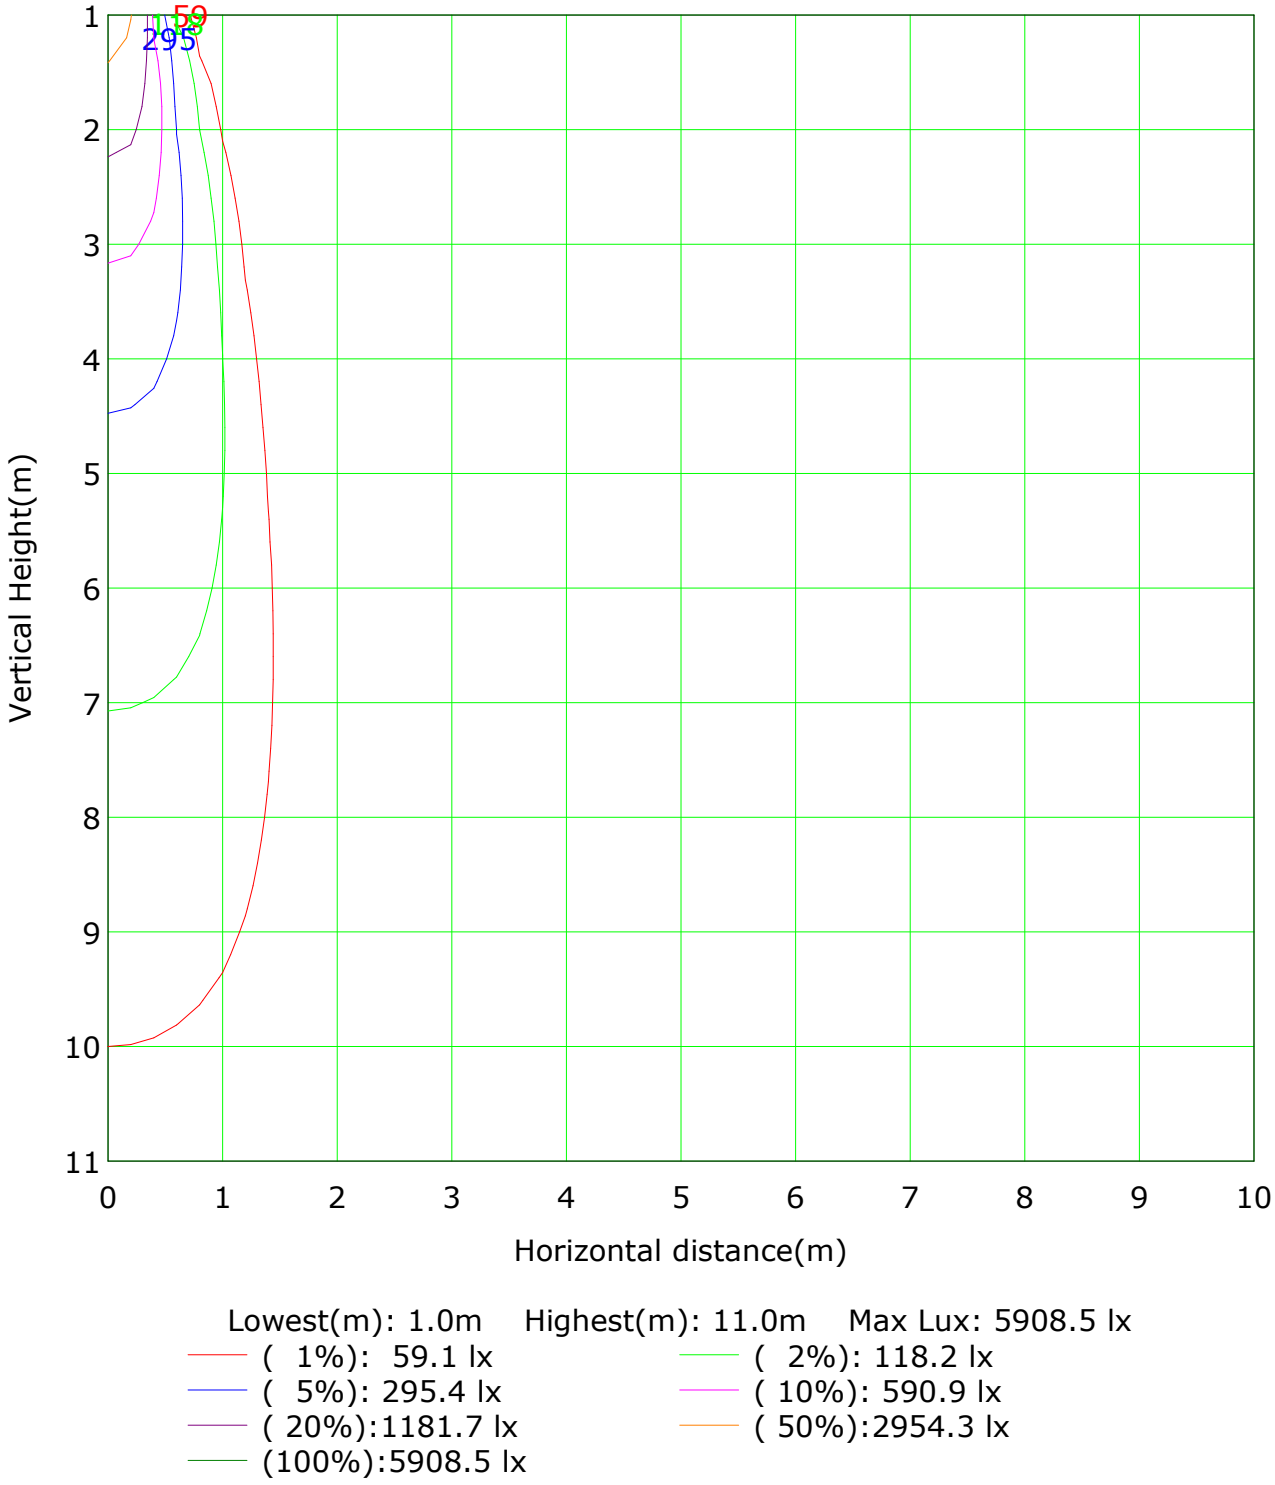

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 5908.5 lx

(1%): 59.1 lx
(2%): 118.2 lx
(5%): 295.4 lx
(10%): 590.9 lx
(20%):1181.7 lx
(50%):2954.3 lx
(100%):5908.5 lx


C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm

Horizontal plane	Vertical plane																							
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	1.4	112.9	367.0	370.0	118.9	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0		972
-80	0.0	0.0	0.0	0.0	0.0	0.0	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	0.0	1190	
-70	0.0	0.0	0.0	0.0	0.0	0.0	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	112.9	367.0	370.0	118.9	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	0.0	1190	
-40	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
-30	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
-20	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
-10	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
0	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
10	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
20	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
30	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
40	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
50	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
60	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
70	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
80	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
90	0.0	0.0	0.0	0.0	0.0	0.0	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	1190	
Flux(T)	0.0	0.0	0.0	0.8	3.6	11.1	37.5	145.2	393.0	396.2	149.9	38.1	10.6	3.4	0.7	0.0	0.0	0.0	0.0		
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	1.4	112.9	367.0	370.0	118.9	2.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	972	

The Average Illuminance Effective Figure

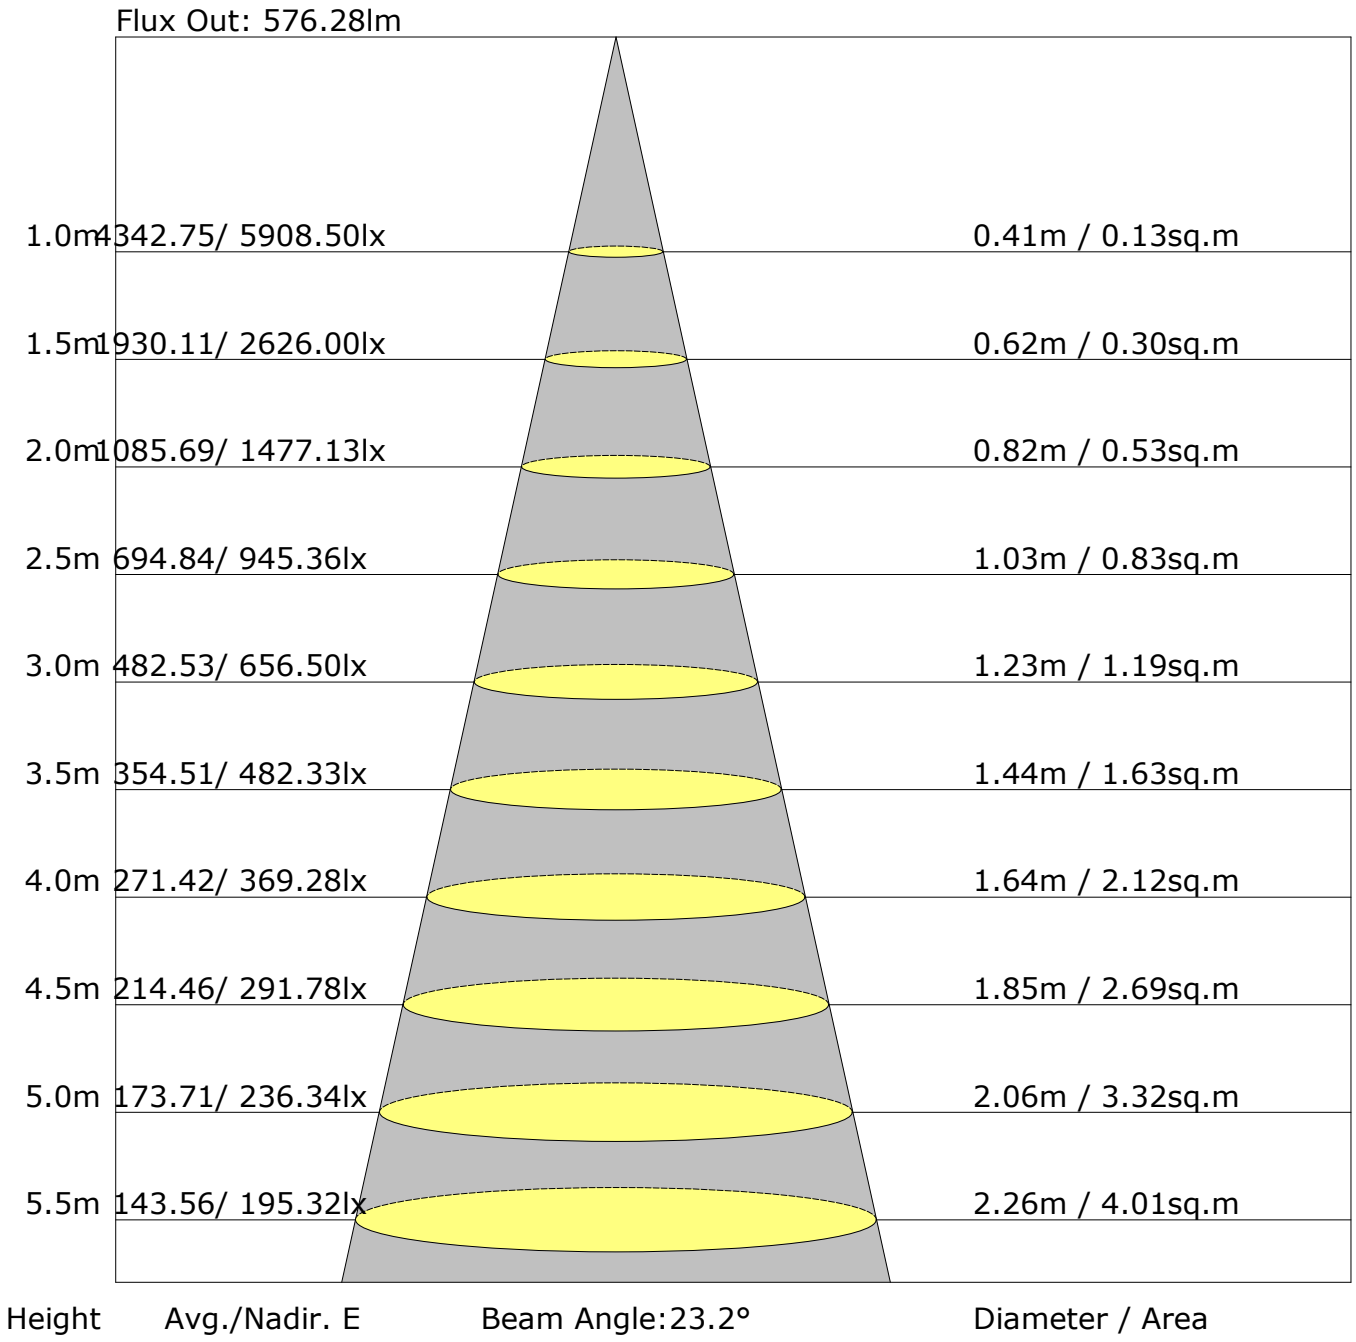

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	12.9	13.5	13.2	13.7	13.9	13.0	13.6	13.3	13.8	14.0
3H	12.8	13.3	13.1	13.6	13.8	12.9	13.4	13.2	13.7	13.9
4H	12.7	13.2	13.0	13.5	13.7	12.8	13.3	13.1	13.6	13.8
6H	12.6	13.1	13.0	13.4	13.7	12.7	13.2	13.1	13.5	13.8
8H	12.6	13.1	12.9	13.4	13.7	12.7	13.2	13.0	13.5	13.8
12H	12.6	13.0	12.9	13.3	13.6	12.7	13.1	13.0	13.4	13.7
X=4H Y=2H	12.8	13.3	13.1	13.5	13.8	12.9	13.4	13.2	13.6	13.9
3H	12.6	13.0	12.9	13.4	13.7	12.7	13.1	13.0	13.4	13.8
4H	12.5	12.9	12.9	13.2	13.6	12.6	13.0	13.0	13.3	13.7
6H	12.4	12.8	12.8	13.1	13.5	12.5	12.9	12.9	13.2	13.6
8H	12.4	12.7	12.8	13.1	13.5	12.5	12.8	12.9	13.2	13.6
12H	12.3	12.6	12.8	13.0	13.5	12.4	12.7	12.9	13.1	13.5
X=8H Y=4H	12.4	12.7	12.8	13.1	13.5	12.5	12.8	12.9	13.2	13.6
6H	12.3	12.5	12.7	13.0	13.4	12.4	12.6	12.8	13.1	13.5
8H	12.2	12.5	12.7	12.9	13.4	12.3	12.6	12.8	13.0	13.5
12H	12.2	12.4	12.7	12.8	13.3	12.3	12.5	12.8	12.9	13.4
X=12H Y=4H	12.3	12.6	12.8	13.0	13.5	12.4	12.7	12.9	13.1	13.5
6H	12.2	12.5	12.7	12.9	13.4	12.3	12.6	12.8	13.0	13.5
8H	12.2	12.4	12.7	12.8	13.3	12.3	12.5	12.8	12.9	13.4
Variations with the observer position at spacings:										
S=1.0H	+3.8/-6.4					+3.8/-6.4				
S=1.5H	+6.4/-1.$					+6.4/-1.$				
S=2.0H	+8.4/-1.$					+8.4/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 1191lm (8log(F/F0) = 0.6).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

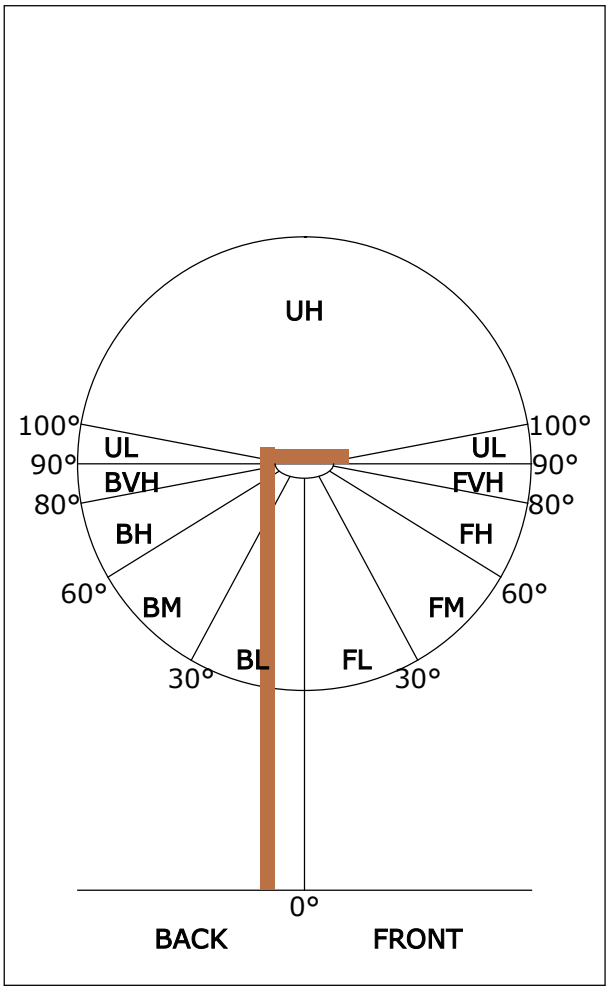

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	599	50.3
FL (0°-30°)	558	46.9
FM (30°-60°)	41	3.5
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	592	49.7
BL (0°-30°)	549	46.1
BM (30°-60°)	42	3.5
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	5901.3	5.6	5.6	0.47	0.47
1.0-2.0	5870.1	16.9	22.5	1.41	1.89
2.0-3.0	5803.3	27.8	50.3	2.33	4.22
3.0-4.0	5699.3	38.2	88.4	3.20	7.42
4.0-5.0	5551.2	47.8	136.2	4.01	11.43
5.0-6.0	5351.4	56.2	192.4	4.72	16.16
6.0-7.0	5091.7	63.2	255.6	5.31	21.46
7.0-8.0	4765.3	68.2	323.8	5.73	27.19
8.0-9.0	4376.3	70.9	394.8	5.96	33.15
9.0-10.0	3938.0	71.3	466.0	5.98	39.13
10.0-11.0	3472.1	69.4	535.4	5.83	44.96
11.0-12.0	3006.3	65.7	601.2	5.52	50.47
12.0-13.0	2564.5	60.9	662.0	5.11	55.58
13.0-14.0	2164.6	55.4	717.4	4.65	60.24
14.0-15.0	1818.6	49.9	767.4	4.19	64.43
15.0-16.0	1527.3	44.8	812.1	3.76	68.19
16.0-17.0	1281.1	39.9	852.0	3.35	71.54
17.0-18.0	1074.2	35.4	887.5	2.97	74.51
18.0-19.0	902.7	31.4	918.9	2.64	77.15
19.0-20.0	760.2	27.8	946.7	2.34	79.49
20.0-21.0	644.5	24.8	971.4	2.08	81.56
21.0-22.0	552.2	22.2	993.6	1.86	83.43
22.0-23.0	476.8	20.0	1013.6	1.68	85.11
23.0-24.0	414.2	18.1	1031.8	1.52	86.63
24.0-25.0	359.6	16.4	1048.1	1.37	88.00
25.0-26.0	311.0	14.7	1062.8	1.23	89.23
26.0-27.0	269.1	13.2	1076.0	1.11	90.34
27.0-28.0	232.2	11.8	1087.7	0.99	91.33
28.0-29.0	199.4	10.4	1098.2	0.88	92.20
29.0-30.0	171.5	9.3	1107.4	0.78	92.98
30.0-31.0	148.1	8.2	1115.7	0.69	93.67
31.0-32.0	128.5	7.4	1123.0	0.62	94.29
32.0-33.0	111.9	6.6	1129.6	0.55	94.84
33.0-34.0	97.6	5.9	1135.5	0.50	95.34
34.0-35.0	84.8	5.3	1140.8	0.44	95.78
35.0-36.0	74.6	4.8	1145.5	0.40	96.18

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	66.7	4.4	1149.9	0.37	96.55
37.0-38.0	59.9	4.0	1153.9	0.34	96.88
38.0-39.0	53.5	3.7	1157.6	0.31	97.19
39.0-40.0	48.2	3.4	1160.9	0.28	97.47
40.0-41.0	44.5	3.2	1164.1	0.27	97.74
41.0-42.0	40.0	2.9	1167.0	0.24	97.98
42.0-43.0	36.9	2.7	1169.7	0.23	98.21
43.0-44.0	34.3	2.6	1172.3	0.22	98.43
44.0-45.0	29.8	2.3	1174.6	0.19	98.62
45.0-46.0	25.6	2.0	1176.6	0.17	98.79
46.0-47.0	23.4	1.9	1178.5	0.16	98.94
47.0-48.0	21.5	1.7	1180.2	0.15	99.09
48.0-49.0	19.2	1.6	1181.8	0.13	99.22
49.0-50.0	17.0	1.4	1183.2	0.12	99.34
50.0-51.0	15.1	1.3	1184.5	0.11	99.45
51.0-52.0	13.6	1.2	1185.6	0.10	99.55
52.0-53.0	11.7	1.0	1186.7	0.09	99.63
53.0-54.0	9.8	0.9	1187.5	0.07	99.70
54.0-55.0	9.4	0.8	1188.4	0.07	99.78
55.0-56.0	8.7	0.8	1189.1	0.07	99.84
56.0-57.0	6.8	0.6	1189.8	0.05	99.89
57.0-58.0	5.3	0.5	1190.2	0.04	99.93
58.0-59.0	3.8	0.4	1190.6	0.03	99.96
59.0-60.0	2.6	0.2	1190.9	0.02	99.98
60.0-61.0	1.5	0.1	1191.0	0.01	100.00
61.0-62.0	0.4	0.0	1191.0	0.00	100.00
62.0-63.0	0.0	0.0	1191.0	0.00	100.00
63.0-64.0	0.0	0.0	1191.0	0.00	100.00
64.0-65.0	0.0	0.0	1191.0	0.00	100.00
65.0-66.0	0.0	0.0	1191.0	0.00	100.00
66.0-67.0	0.0	0.0	1191.0	0.00	100.00
67.0-68.0	0.0	0.0	1191.0	0.00	100.00
68.0-69.0	0.0	0.0	1191.0	0.00	100.00
69.0-70.0	0.0	0.0	1191.0	0.00	100.00
70.0-71.0	0.0	0.0	1191.0	0.00	100.00
71.0-72.0	0.0	0.0	1191.0	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	1191.0	0.00	100.00
73.0-74.0	0.0	0.0	1191.0	0.00	100.00
74.0-75.0	0.0	0.0	1191.0	0.00	100.00
75.0-76.0	0.0	0.0	1191.0	0.00	100.00
76.0-77.0	0.0	0.0	1191.0	0.00	100.00
77.0-78.0	0.0	0.0	1191.0	0.00	100.00
78.0-79.0	0.0	0.0	1191.0	0.00	100.00
79.0-80.0	0.0	0.0	1191.0	0.00	100.00
80.0-81.0	0.0	0.0	1191.0	0.00	100.00
81.0-82.0	0.0	0.0	1191.0	0.00	100.00
82.0-83.0	0.0	0.0	1191.0	0.00	100.00
83.0-84.0	0.0	0.0	1191.0	0.00	100.00
84.0-85.0	0.0	0.0	1191.0	0.00	100.00
85.0-86.0	0.0	0.0	1191.0	0.00	100.00
86.0-87.0	0.0	0.0	1191.0	0.00	100.00
87.0-88.0	0.0	0.0	1191.0	0.00	100.00
88.0-89.0	0.0	0.0	1191.0	0.00	100.00
89.0-90.0	0.0	0.0	1191.0	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	5908.5	5908.5								
G1.0	5899.5	5888.9								
G2.0	5854.2	5837.6								
G3.0	5769.8	5751.7								
G4.0	5652.2	5623.5								
G5.0	5481.8	5447.1								
G6.0	5260.2	5216.5								
G7.0	4975.3	4915.0								
G8.0	4624.0	4547.1								
G9.0	4212.4	4121.9								
G10.0	3761.6	3656.1								
G11.0	3288.2	3182.7								
G12.0	2831.4	2722.8								
G13.0	2409.2	2294.6								
G14.0	2027.8	1926.8								
G15.0	1703.7	1616.2								
G16.0	1433.8	1355.4								
G17.0	1194.1	1141.3								
G18.0	1007.1	954.3								
G19.0	848.8	800.6								
G20.0	719.2	672.4								
G21.0	616.6	569.9								
G22.0	530.7	491.5								
G23.0	458.3	426.7								
G24.0	396.5	375.4								
G25.0	340.7	325.6								
G26.0	294.0	283.4								
G27.0	253.3	245.8								
G28.0	214.1	215.6								
G29.0	182.4	185.4								
G30.0	156.8	161.3								
G31.0	135.7	138.7								
G32.0	119.1	120.6								
G33.0	101.0	107.0								
G34.0	88.9	93.5								
G35.0	75.4	81.4								
G36.0	69.3	72.4								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	60.3	64.8								
G38.0	54.3	60.3								
G39.0	48.2	51.3								
G40.0	45.2	48.2								
G41.0	42.2	42.2								
G42.0	36.2	39.2								
G43.0	36.2	36.2								
G44.0	33.2	31.7								
G45.0	25.6	28.6								
G46.0	24.1	24.1								
G47.0	22.6	22.6								
G48.0	19.6	21.1								
G49.0	16.6	19.6								
G50.0	15.1	16.6								
G51.0	15.1	13.6								
G52.0	12.1	13.6								
G53.0	9.1	12.1								
G54.0	9.1	9.1								
G55.0	9.1	10.6								
G56.0	7.5	7.5								
G57.0	4.5	7.5								
G58.0	4.5	4.5								
G59.0	1.5	4.5								
G60.0	3.0	1.5								
G61.0	0.0	1.5								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: