Report No.: Test Time: 2026-09-11 16:37

Luminaire Property


Luminaire Manufacturer:
Luminaire Description: LITE-55
Luminous Length (mm): -51
Luminous Width (mm): -51
Voltage: 225.7 V
Current: 0.070 A
Power: 15.20 W
Power Factor: 0.964

Photometric Results

CIE Class: Direct
Total Rated Lamp Lumens: 1256.5 lm
Measurement Flux: 1256.5 lm
Efficiency: 100%
Downward Ratio: 100%
Upward Ratio: 0%
Horizontal Diffuse Angle(50%): H25.2
Vertical Diffuse Angle(50%): V25.2
Luminaire Efficacy Rating (LER): 82.72
Central Intensity: 5700.44 cd
Max. Intensity: 5726.07 cd
Pos of Max. Intensity: H180 V1
S/MH(C0/C180): 0.43
S/MH(C90/C270): 0.43


Picture Of Luminaire


Luminous Intensity Distribution Curve

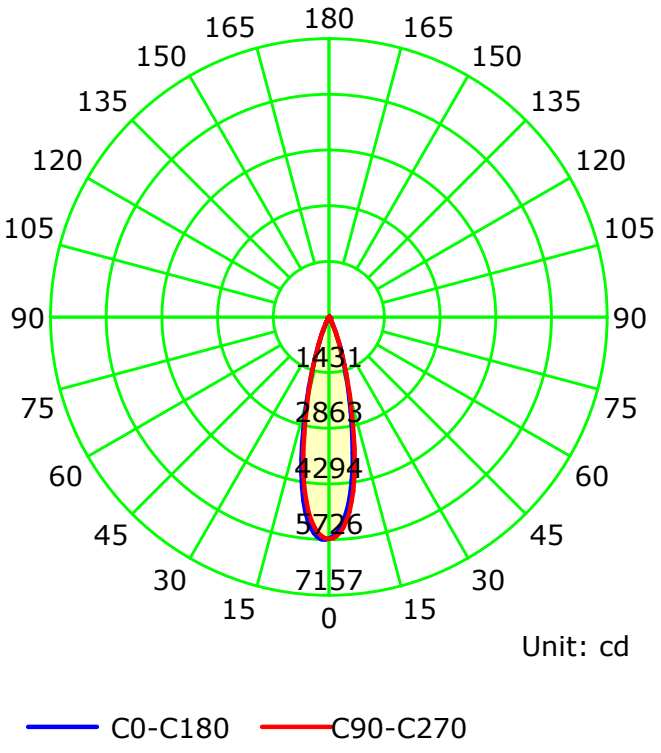

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Luminous Intensity Distribution Curve

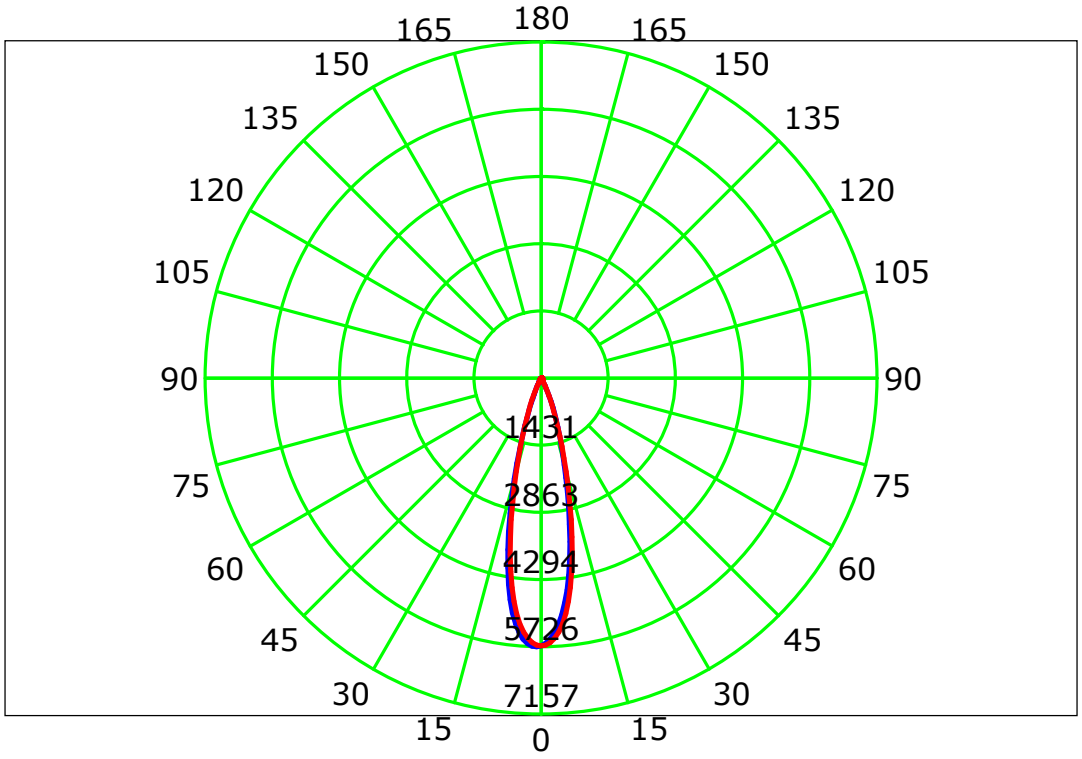


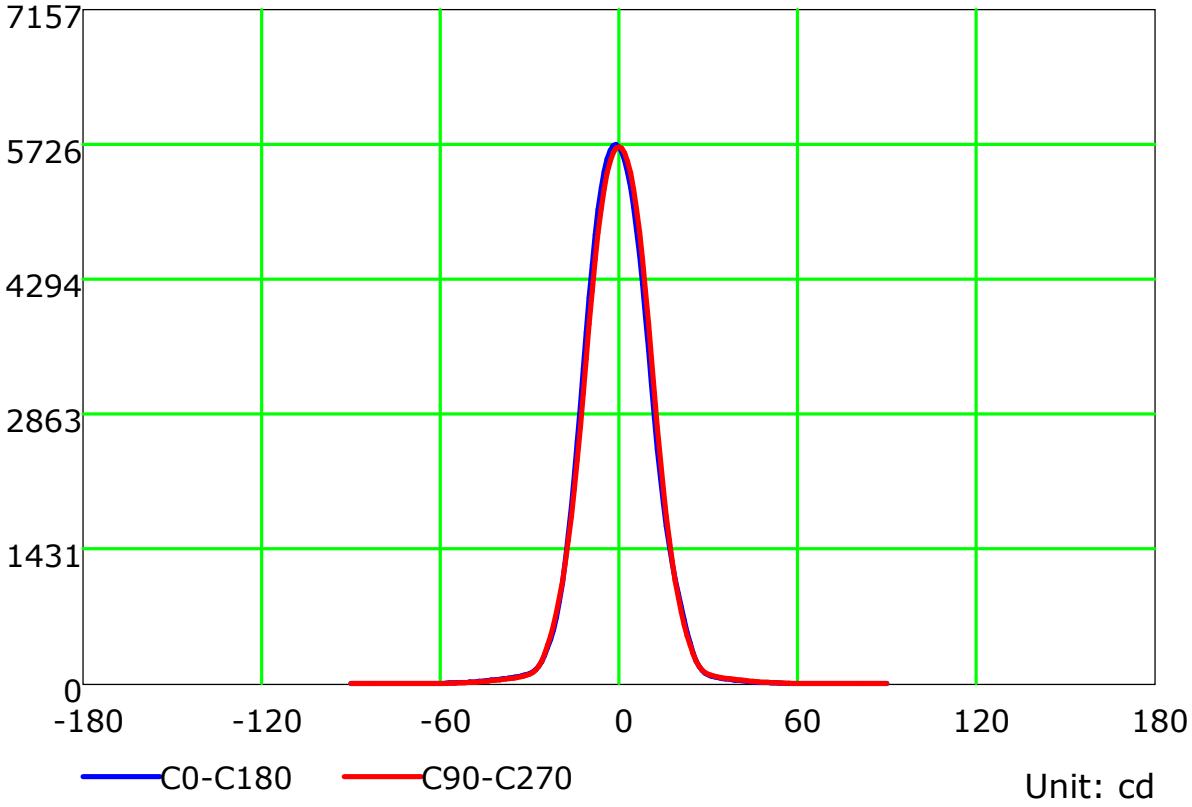

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

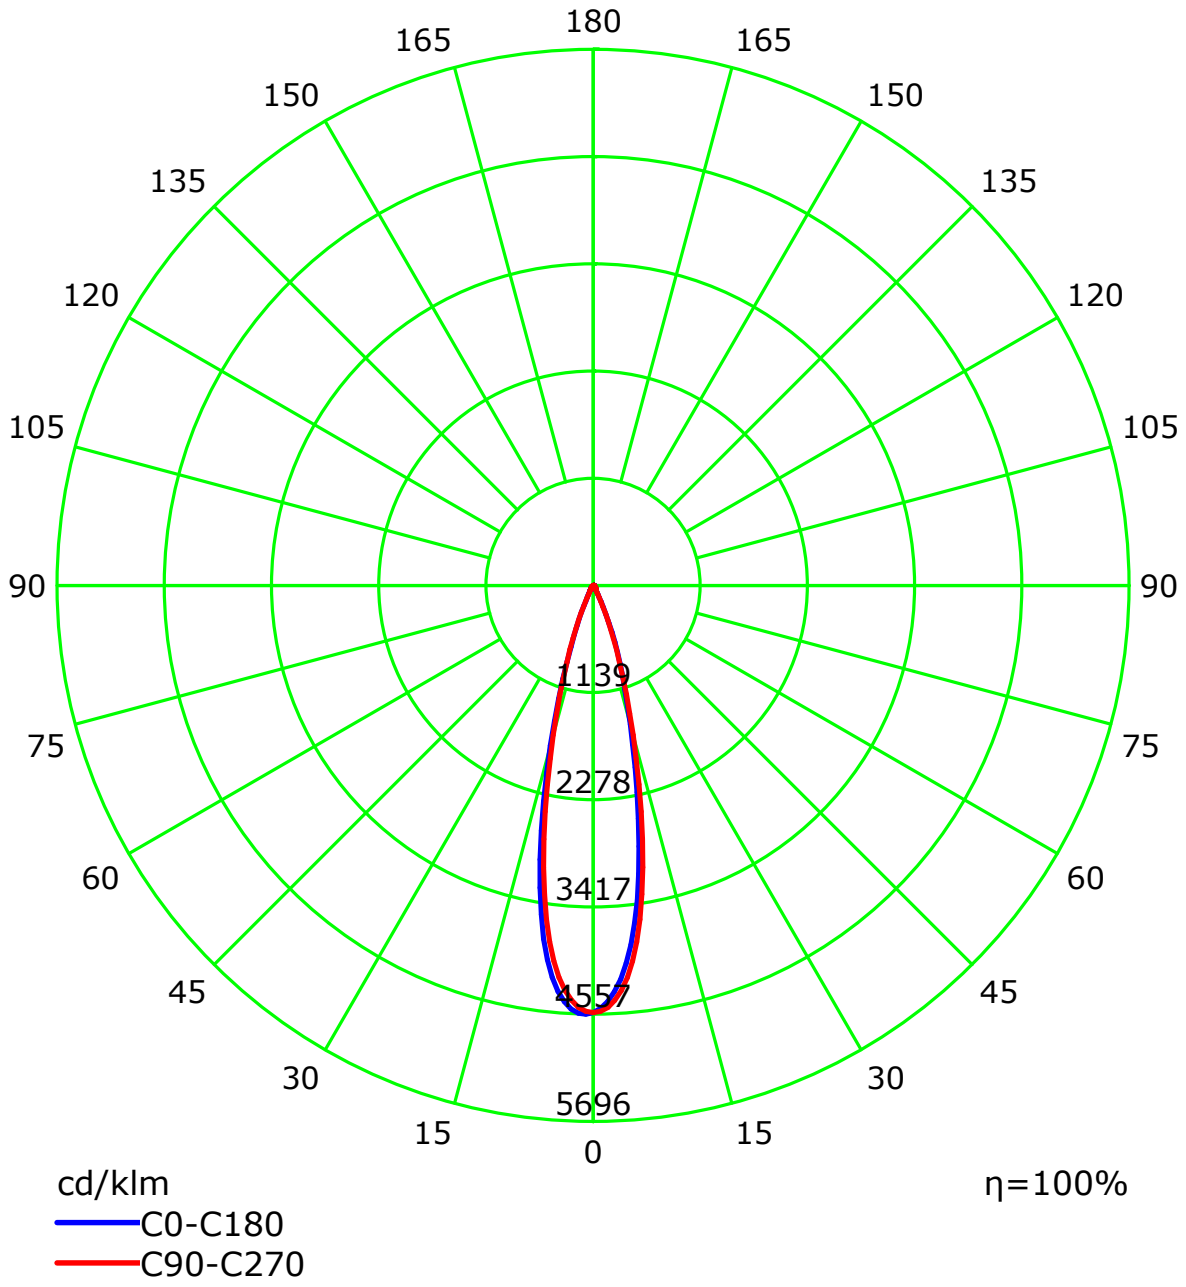

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

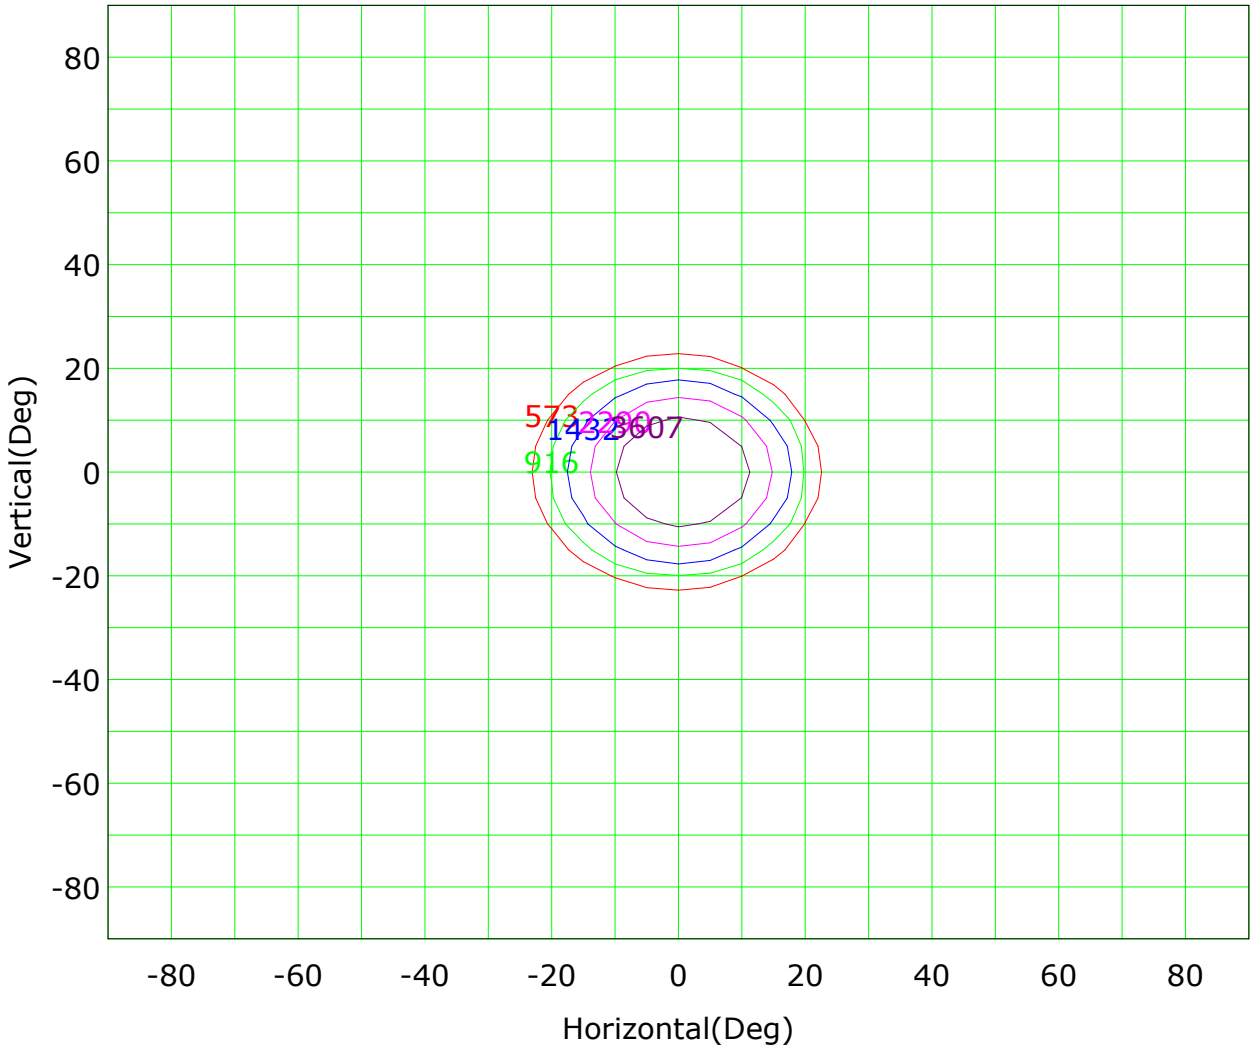


Imax (100%): 5726 cd

(10%): 573 cd
(16%): 916 cd
(25%): 1432 cd
(40%): 2290 cd
(63%): 3607 cd
(100%): 5726 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

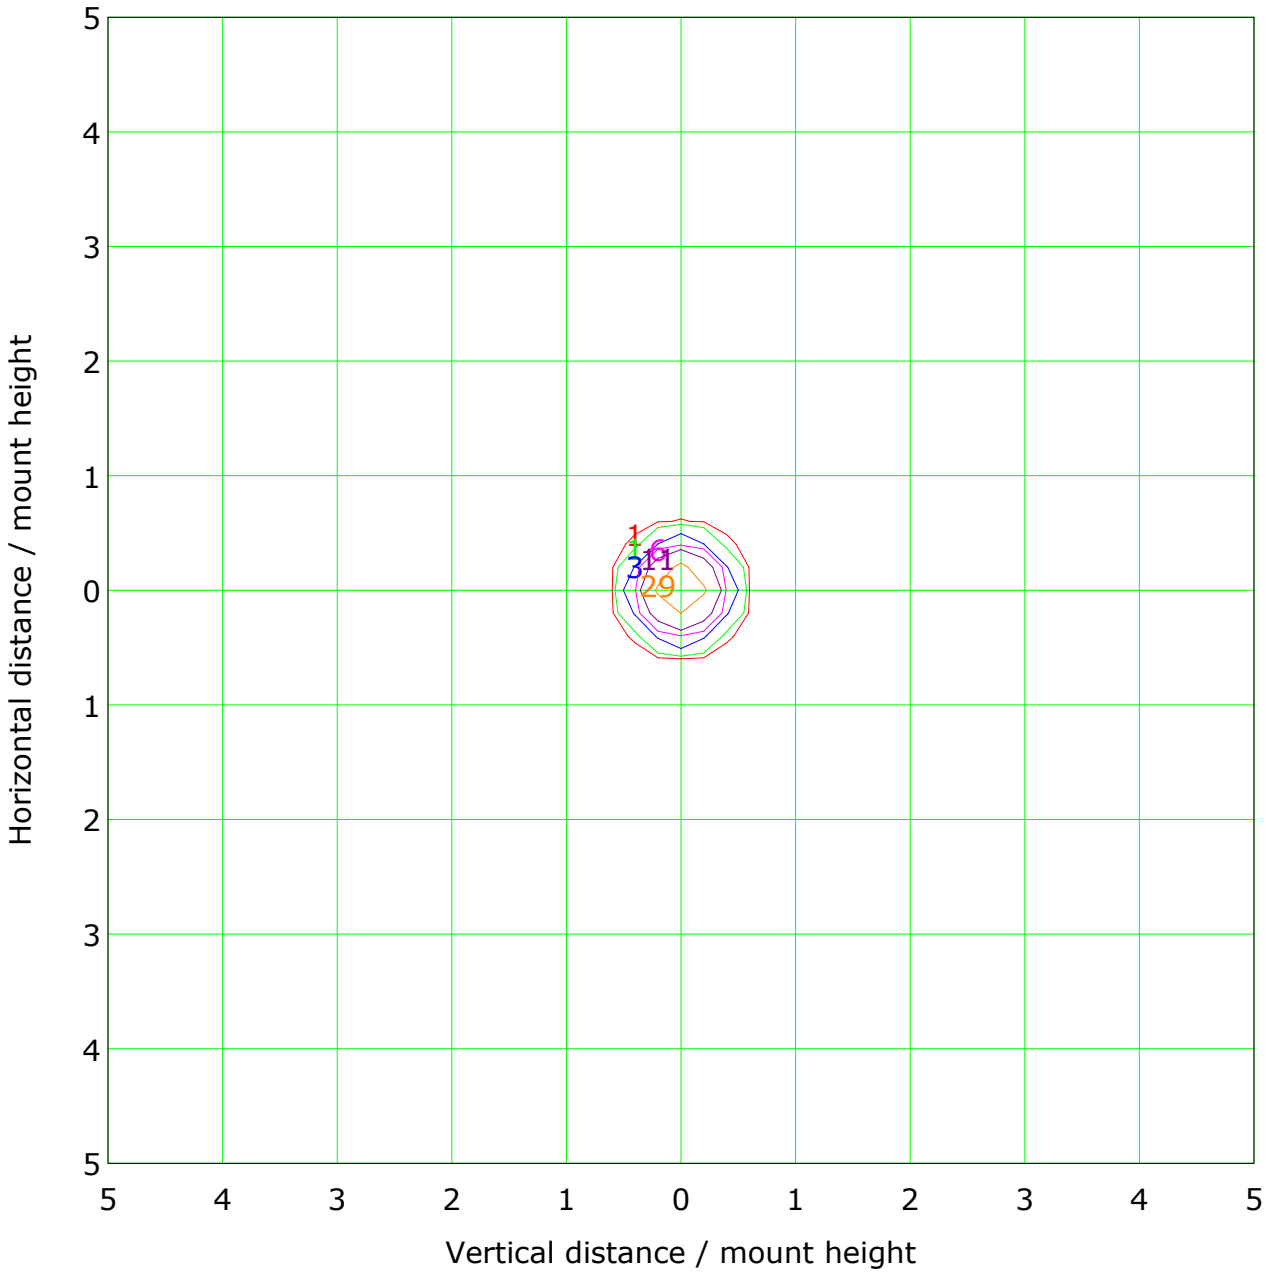


Mounting Height: 10.0m Max Lux(100%): 57.2 lx

(1%): 0.6 lx	(2%): 1.1 lx
(5%): 2.9 lx	(10%): 5.7 lx
(20%): 11.4 lx	(50%): 28.6 lx
(100%): 57.2 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Illuminance at a Distance

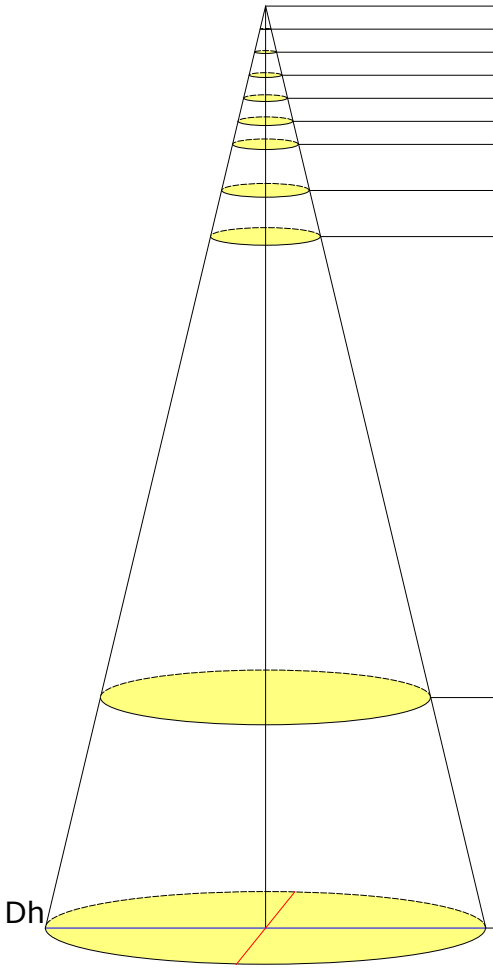


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	22801.76	0.22/0.22	0.0	11000.56
1.0	5700.44	0.45/0.45	0.2	2750.14
1.5	2533.53	0.67/0.67	0.4	1222.28
2.0	1425.11	0.89/0.90	0.6	687.53
2.5	912.07	1.11/1.12	1.0	440.02
3.0	633.38	1.34/1.35	1.4	305.57
4.0	356.28	1.78/1.80	2.5	171.88
5.0	228.02	2.23/2.24	3.9	110.01
15.0	25.34	6.69/6.73	35.2	12.22
20.0	14.25	8.92/8.98	62.6	6.88

Beam Angle(B): H25.1 V25.3 Field Angle(F): H44.8 V44.9

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

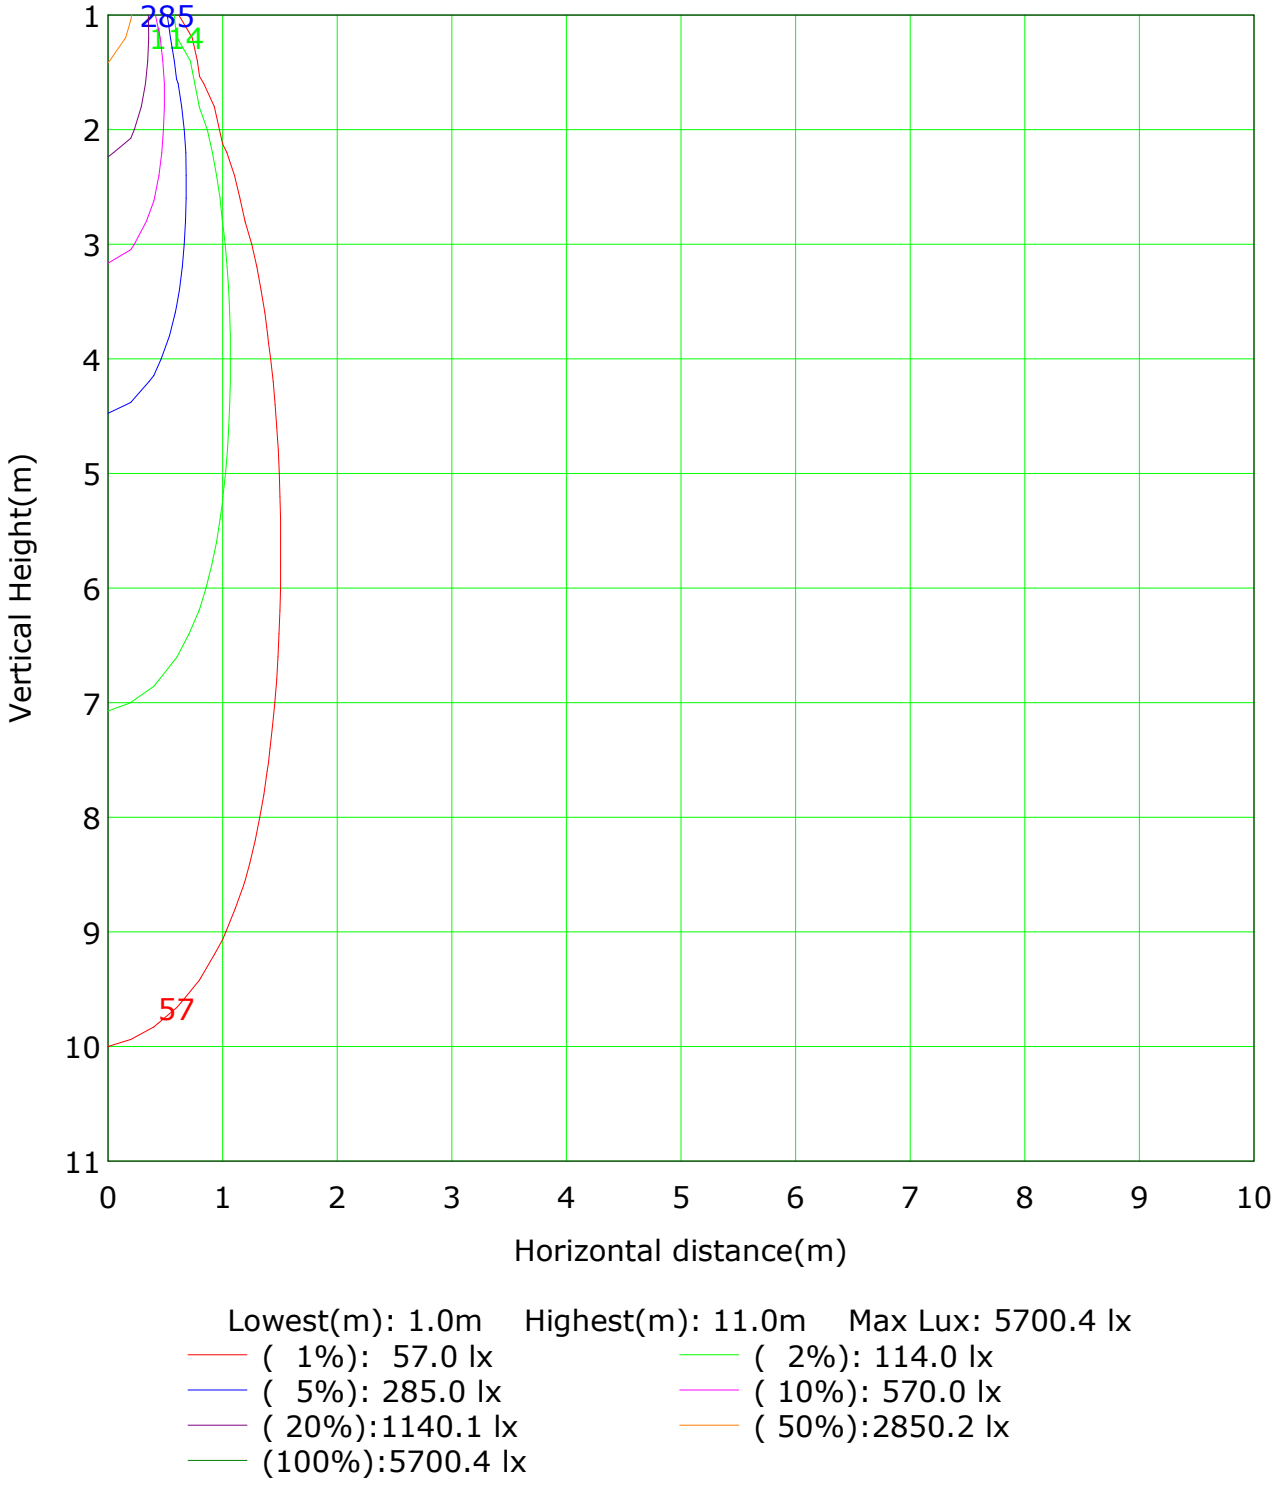

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 5700.4 lx

(1%): 57.0 lx
(2%): 114.0 lx
(5%): 285.0 lx
(10%): 570.0 lx
(20%):1140.1 lx
(50%):2850.2 lx
(100%):5700.4 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.3	0.5	0.6	0.6	0.5	0.3	0.2	0.0	0.0	0.0	0.0	0.0	3.5	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.2	0.5	1.0	1.4	1.7	1.7	1.4	1.0	0.5	0.2	0.0	0.0	0.0	0.0	9.6	0.0
-30	0.0	0.0	0.0	0.0	0.1	0.4	1.0	1.9	4.4	8.9	8.9	4.4	1.9	1.0	0.4	0.1	0.0	0.0	0.0	33.4	5.4
-20	0.0	0.0	0.0	0.0	0.2	0.6	1.5	4.6	23.4	57.9	57.9	23.4	4.6	1.5	0.6	0.2	0.0	0.0	0.0	176.5	153.6
-10	0.0	0.0	0.0	0.0	0.2	0.8	1.9	10.0	57.6	138.8	138.8	57.6	10.0	1.9	0.8	0.2	0.0	0.0	0.0	418.5	399.2
0	0.0	0.0	0.0	0.0	0.2	0.7	1.9	10.1	56.3	131.8	131.8	56.3	10.1	1.9	0.7	0.2	0.0	0.0	0.0	402.0	383.4
10	0.0	0.0	0.0	0.0	0.1	0.6	1.4	4.6	23.9	53.0	53.0	23.9	4.6	1.4	0.6	0.1	0.0	0.0	0.0	167.0	146.4
20	0.0	0.0	0.0	0.0	0.1	0.3	0.9	1.7	4.3	9.7	9.7	4.3	1.7	0.9	0.3	0.1	0.0	0.0	0.0	33.9	8.8
30	0.0	0.0	0.0	0.0	0.0	0.1	0.4	0.8	1.1	1.4	1.4	1.1	0.8	0.4	0.1	0.0	0.0	0.0	0.0	7.7	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.2	0.4	0.4	0.4	0.4	0.2	0.1	0.0	0.0	0.0	0.0	0.0	2.4	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1256	1097
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 638.86lm

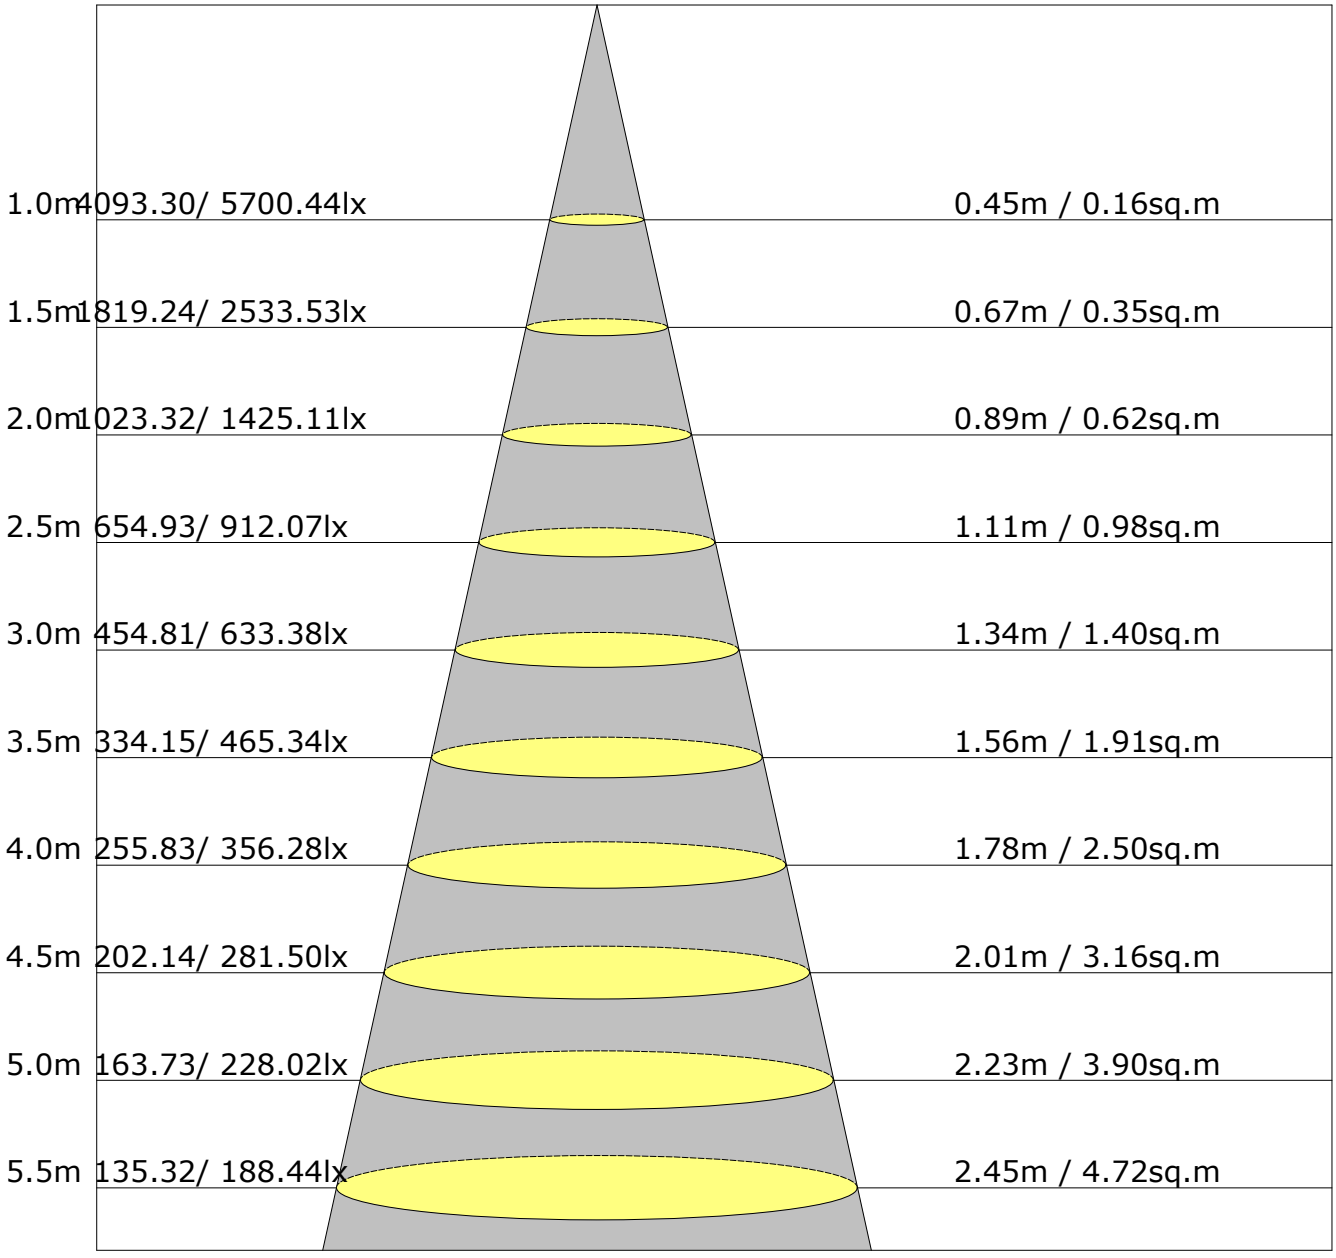

Height Avg./Nadir. E Beam Angle:25.1° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	10.3	10.9	10.5	11.1	11.3	10.9	11.5	11.2	11.7	11.9
3H	10.2	10.7	10.4	10.9	11.2	10.8	11.3	11.1	11.6	11.8
4H	10.1	10.6	10.4	10.9	11.1	10.7	11.2	11.0	11.5	11.7
6H	10.0	10.5	10.3	10.8	11.1	10.6	11.1	11.0	11.4	11.7
8H	10.0	10.4	10.3	10.7	11.0	10.6	11.1	10.9	11.4	11.6
12H	9.9	10.4	10.3	10.7	11.0	10.6	11.0	10.9	11.3	11.6
X=4H Y=2H	10.1	10.6	10.4	10.9	11.1	10.7	11.3	11.0	11.5	11.8
3H	10.0	10.4	10.3	10.7	11.0	10.6	11.0	10.9	11.3	11.6
4H	9.9	10.3	10.3	10.6	11.0	10.5	10.9	10.9	11.2	11.6
6H	9.8	10.1	10.2	10.5	10.9	10.4	10.8	10.8	11.1	11.5
8H	9.7	10.1	10.2	10.5	10.9	10.4	10.7	10.8	11.1	11.5
12H	9.7	10.0	10.1	10.4	10.8	10.3	10.6	10.7	11.0	11.4
X=8H Y=4H	9.7	10.1	10.2	10.5	10.9	10.4	10.7	10.8	11.1	11.5
6H	9.6	9.9	10.1	10.3	10.8	10.3	10.5	10.7	10.9	11.4
8H	9.6	9.8	10.1	10.3	10.7	10.2	10.4	10.7	10.9	11.4
12H	9.5	9.7	10.0	10.2	10.7	10.2	10.4	10.6	10.8	11.3
X=12H Y=4H	9.7	10.0	10.1	10.4	10.8	10.3	10.6	10.7	11.0	11.4
6H	9.6	9.8	10.1	10.3	10.7	10.2	10.4	10.7	10.9	11.4
8H	9.5	9.7	10.0	10.2	10.7	10.2	10.4	10.6	10.8	11.3
Variations with the observer position at spacings:										
S=1.0H	+3.1/-8.6					+3.0/-6.3				
S=1.5H	+5.7/-1.$					+5.7/-1.$				
S=2.0H	+7.7/-1.$					+7.7/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 1257lm (8log(F/F0) = 0.8).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

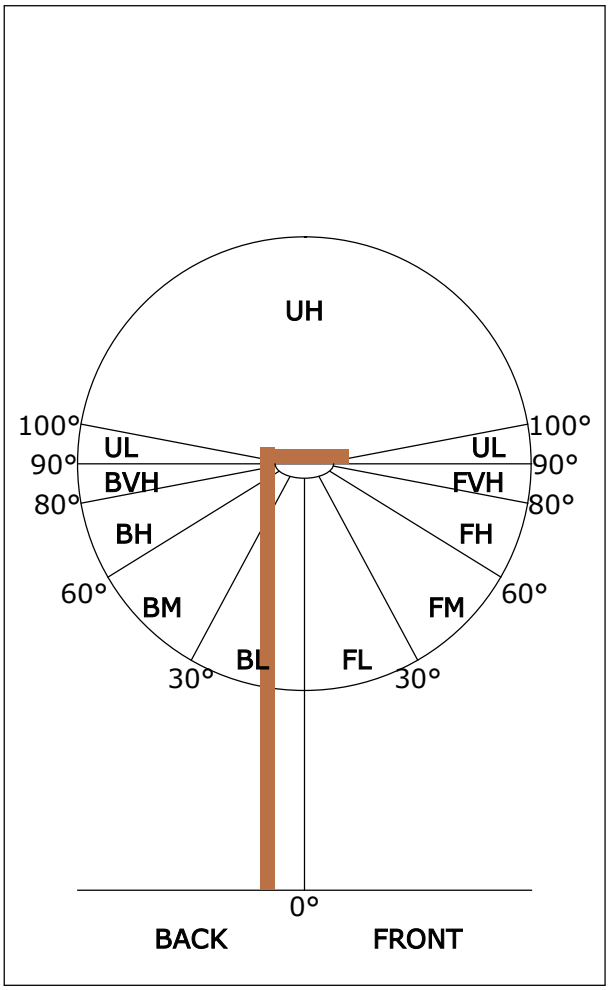

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	614	48.9
FL (0°-30°)	584	46.5
FM (30°-60°)	30	2.4
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	643	51.1
BL (0°-30°)	608	48.4
BM (30°-60°)	35	2.8
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	5693.3	5.4	5.4	0.43	0.43
1.0-2.0	5661.2	16.3	21.7	1.29	1.73
2.0-3.0	5592.6	26.8	48.5	2.13	3.86
3.0-4.0	5484.8	36.7	85.2	2.92	6.78
4.0-5.0	5336.3	45.9	131.1	3.65	10.43
5.0-6.0	5147.5	54.1	185.2	4.31	14.74
6.0-7.0	4917.6	61.0	246.2	4.86	19.60
7.0-8.0	4648.5	66.5	312.8	5.30	24.89
8.0-9.0	4339.0	70.3	383.1	5.60	30.49
9.0-10.0	3996.4	72.3	455.4	5.76	36.25
10.0-11.0	3635.0	72.6	528.1	5.78	42.03
11.0-12.0	3267.8	71.4	599.5	5.69	47.71
12.0-13.0	2904.9	68.9	668.5	5.49	53.20
13.0-14.0	2552.1	65.3	733.8	5.20	58.40
14.0-15.0	2223.8	61.1	794.9	4.86	63.26
15.0-16.0	1923.8	56.4	851.2	4.49	67.75
16.0-17.0	1650.1	51.4	902.6	4.09	71.84
17.0-18.0	1407.4	46.4	949.0	3.69	75.53
18.0-19.0	1190.7	41.4	990.5	3.30	78.83
19.0-20.0	999.6	36.6	1027.1	2.91	81.74
20.0-21.0	835.6	32.1	1059.1	2.55	84.29
21.0-22.0	692.0	27.8	1087.0	2.21	86.51
22.0-23.0	566.5	23.8	1110.7	1.89	88.40
23.0-24.0	456.8	20.0	1130.7	1.59	89.99
24.0-25.0	359.2	16.3	1147.0	1.30	91.29
25.0-26.0	275.9	13.0	1160.1	1.04	92.32
26.0-27.0	210.7	10.3	1170.4	0.82	93.14
27.0-28.0	163.2	8.3	1178.6	0.66	93.80
28.0-29.0	130.8	6.8	1185.5	0.54	94.35
29.0-30.0	109.7	5.9	1191.4	0.47	94.82
30.0-31.0	95.4	5.3	1196.7	0.42	95.24
31.0-32.0	84.8	4.9	1201.6	0.39	95.63
32.0-33.0	77.3	4.6	1206.1	0.36	95.99
33.0-34.0	70.5	4.3	1210.4	0.34	96.33
34.0-35.0	63.7	4.0	1214.4	0.31	96.64
35.0-36.0	58.0	3.7	1218.0	0.29	96.94

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	54.6	3.6	1221.6	0.28	97.22
37.0-38.0	50.9	3.4	1225.0	0.27	97.49
38.0-39.0	46.4	3.2	1228.2	0.25	97.74
39.0-40.0	42.6	3.0	1231.1	0.24	97.98
40.0-41.0	39.6	2.8	1234.0	0.22	98.20
41.0-42.0	36.6	2.7	1236.6	0.21	98.42
42.0-43.0	33.2	2.5	1239.1	0.20	98.61
43.0-44.0	29.4	2.2	1241.3	0.18	98.79
44.0-45.0	26.0	2.0	1243.3	0.16	98.95
45.0-46.0	23.4	1.8	1245.1	0.15	99.09
46.0-47.0	20.4	1.6	1246.7	0.13	99.22
47.0-48.0	17.3	1.4	1248.1	0.11	99.33
48.0-49.0	15.1	1.2	1249.4	0.10	99.43
49.0-50.0	14.3	1.2	1250.6	0.10	99.53
50.0-51.0	12.8	1.1	1251.7	0.09	99.61
51.0-52.0	10.6	0.9	1252.6	0.07	99.69
52.0-53.0	9.8	0.9	1253.4	0.07	99.75
53.0-54.0	8.7	0.8	1254.2	0.06	99.81
54.0-55.0	7.2	0.6	1254.8	0.05	99.86
55.0-56.0	5.7	0.5	1255.3	0.04	99.91
56.0-57.0	4.5	0.4	1255.7	0.03	99.94
57.0-58.0	3.8	0.3	1256.1	0.03	99.97
58.0-59.0	1.9	0.2	1256.3	0.01	99.98
59.0-60.0	0.8	0.1	1256.3	0.01	99.99
60.0-61.0	1.1	0.1	1256.5	0.01	99.99
61.0-62.0	0.8	0.1	1256.5	0.01	100.00
62.0-63.0	0.0	0.0	1256.5	0.00	100.00
63.0-64.0	0.0	0.0	1256.5	0.00	100.00
64.0-65.0	0.0	0.0	1256.5	0.00	100.00
65.0-66.0	0.0	0.0	1256.5	0.00	100.00
66.0-67.0	0.0	0.0	1256.5	0.00	100.00
67.0-68.0	0.0	0.0	1256.5	0.00	100.00
68.0-69.0	0.0	0.0	1256.5	0.00	100.00
69.0-70.0	0.0	0.0	1256.5	0.00	100.00
70.0-71.0	0.0	0.0	1256.5	0.00	100.00
71.0-72.0	0.0	0.0	1256.5	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	1256.5	0.00	100.00
73.0-74.0	0.0	0.0	1256.5	0.00	100.00
74.0-75.0	0.0	0.0	1256.5	0.00	100.00
75.0-76.0	0.0	0.0	1256.5	0.00	100.00
76.0-77.0	0.0	0.0	1256.5	0.00	100.00
77.0-78.0	0.0	0.0	1256.5	0.00	100.00
78.0-79.0	0.0	0.0	1256.5	0.00	100.00
79.0-80.0	0.0	0.0	1256.5	0.00	100.00
80.0-81.0	0.0	0.0	1256.5	0.00	100.00
81.0-82.0	0.0	0.0	1256.5	0.00	100.00
82.0-83.0	0.0	0.0	1256.5	0.00	100.00
83.0-84.0	0.0	0.0	1256.5	0.00	100.00
84.0-85.0	0.0	0.0	1256.5	0.00	100.00
85.0-86.0	0.0	0.0	1256.5	0.00	100.00
86.0-87.0	0.0	0.0	1256.5	0.00	100.00
87.0-88.0	0.0	0.0	1256.5	0.00	100.00
88.0-89.0	0.0	0.0	1256.5	0.00	100.00
89.0-90.0	0.0	0.0	1256.5	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	5700.4	5700.4								
G1.0	5646.2	5726.1								
G2.0	5558.7	5714.0								
G3.0	5433.6	5664.3								
G4.0	5269.3	5572.3								
G5.0	5064.2	5439.6								
G6.0	4824.5	5261.7								
G7.0	4547.1	5037.1								
G8.0	4244.0	4765.7								
G9.0	3900.3	4446.1								
G10.0	3540.0	4099.3								
G11.0	3172.1	3728.4								
G12.0	2823.8	3347.0								
G13.0	2492.1	2956.5								
G14.0	2187.6	2572.1								
G15.0	1919.2	2216.3								
G16.0	1672.0	1887.6								
G17.0	1457.9	1583.0								
G18.0	1274.0	1314.7								
G19.0	1105.1	1068.9								
G20.0	952.8	871.4								
G21.0	814.1	704.1								
G22.0	676.9	572.9								
G23.0	545.8	470.4								
G24.0	429.7	381.4								
G25.0	325.6	300.0								
G26.0	244.2	233.7								
G27.0	182.4	182.4								
G28.0	140.2	147.8								
G29.0	110.1	125.1								
G30.0	95.0	108.6								
G31.0	81.4	96.5								
G32.0	72.4	88.9								
G33.0	66.3	81.4								
G34.0	60.3	73.9								
G35.0	51.3	69.3								
G36.0	48.2	63.3								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	48.2	58.8								
G38.0	42.2	54.3								
G39.0	36.2	52.8								
G40.0	34.7	46.7								
G41.0	33.2	43.7								
G42.0	30.1	39.2								
G43.0	25.6	37.7								
G44.0	22.6	31.7								
G45.0	19.6	30.1								
G46.0	16.6	27.1								
G47.0	13.6	24.1								
G48.0	12.1	19.6								
G49.0	12.1	16.6								
G50.0	10.6	18.1								
G51.0	9.1	13.6								
G52.0	7.5	12.1								
G53.0	7.5	12.1								
G54.0	4.5	10.6								
G55.0	6.0	7.5								
G56.0	1.5	7.5								
G57.0	1.5	7.5								
G58.0	1.5	4.5								
G59.0	0.0	1.5								
G60.0	0.0	1.5								
G61.0	0.0	3.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: