

Report No.:

Test Time: 2026-09-30 19:19

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 32.10112 36D

Luminous Length (mm): -60

Voltage: 230.7 V

Power: 20.00 W

Lamp Description: BLX V10C 3000K

Luminous Width (mm): -60

Current: 0.092 A

Power Factor: 0.939

Photometric Results

CIE Class: Direct

Measurement Flux: 2233.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H41

Vertical Diffuse Angle(50%): V41

Luminaire Efficacy Rating (LER): 111.74

Max. Intensity: 3846.13 cd

S/MH(C0/C180): 0.68

Total Rated Lamp Lumens: 2233.8 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 3846.13 cd


Pos of Max. Intensity: H0 V0

S/MH(C90/C270): 0.68

Picture Of Luminaire



Luminous Intensity Distribution Curve

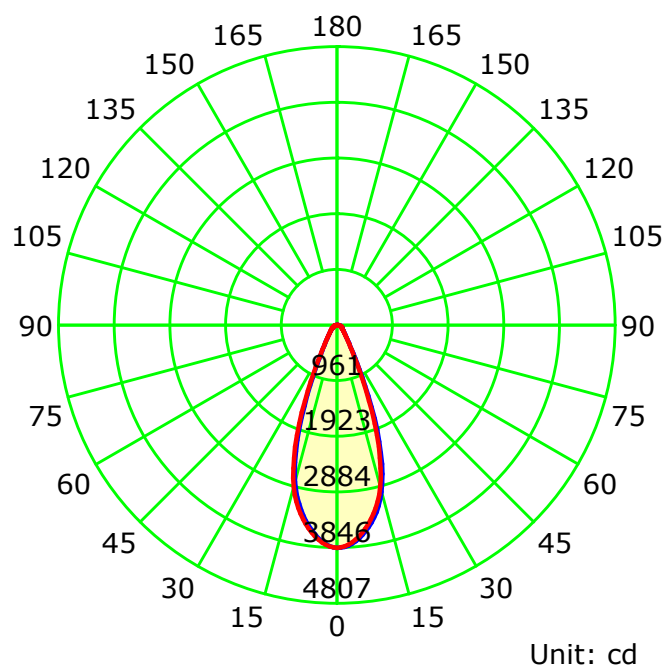

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

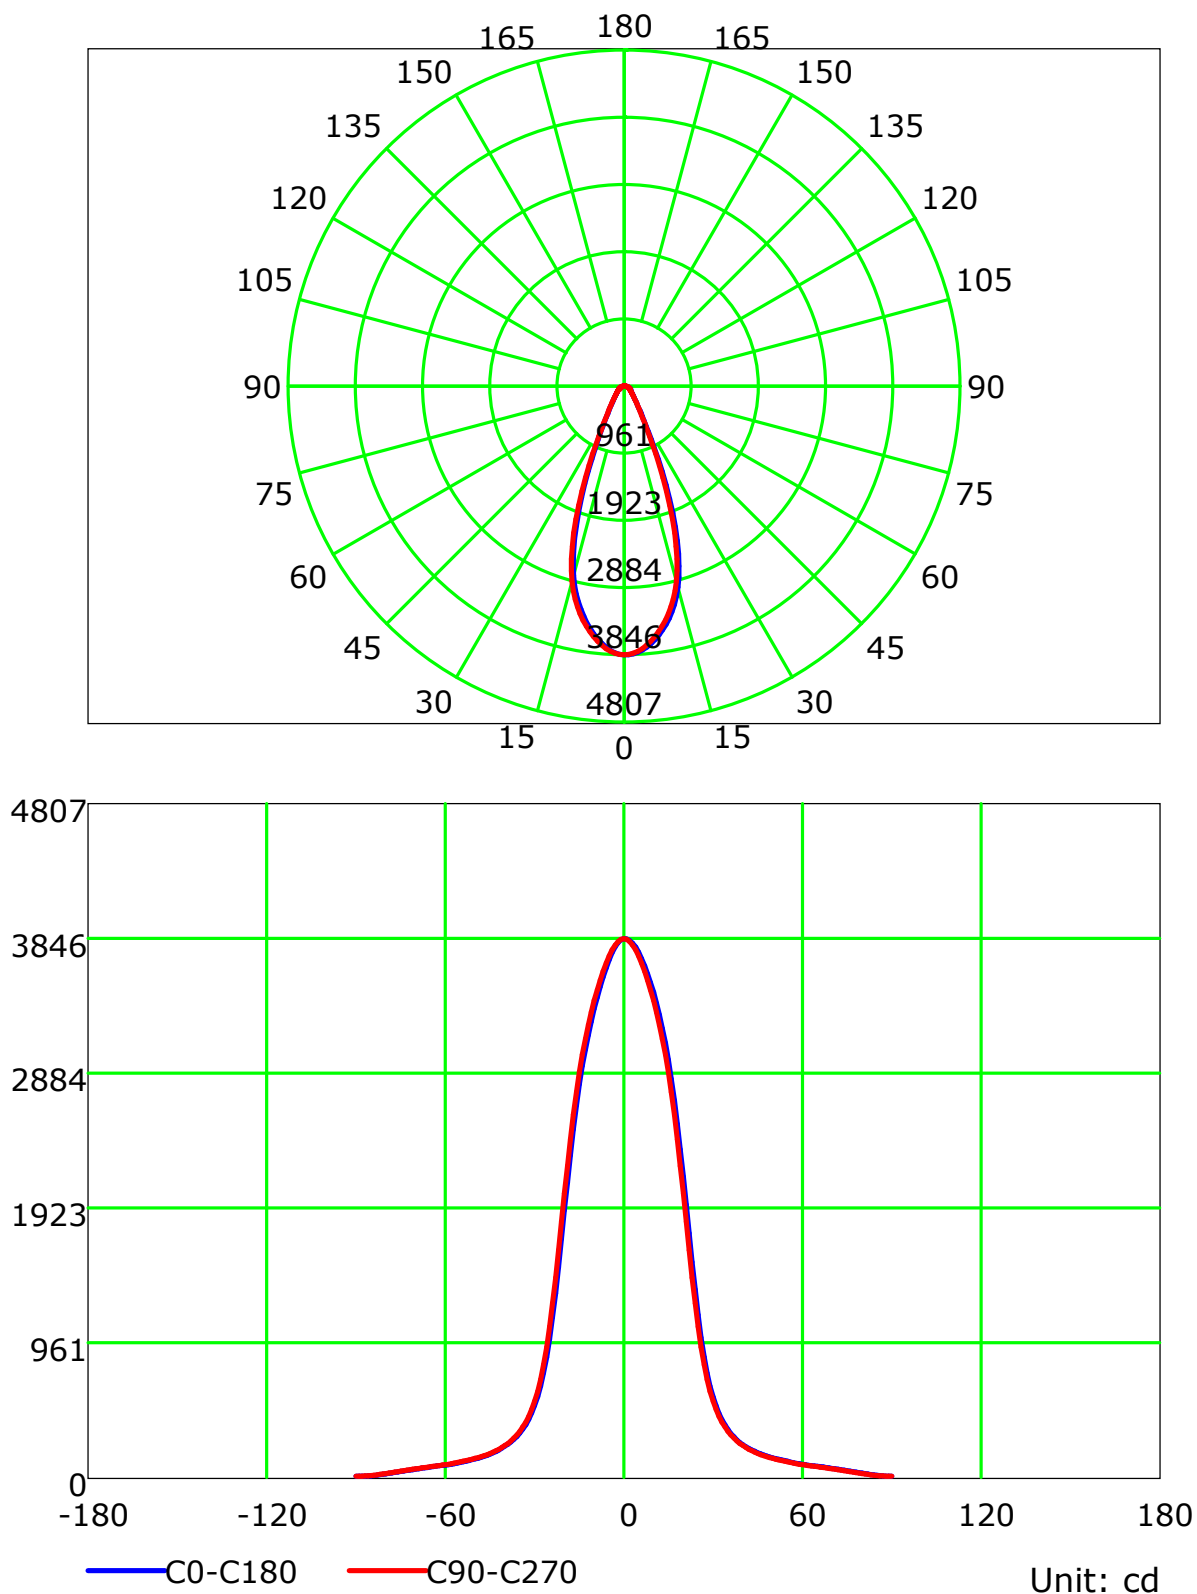

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

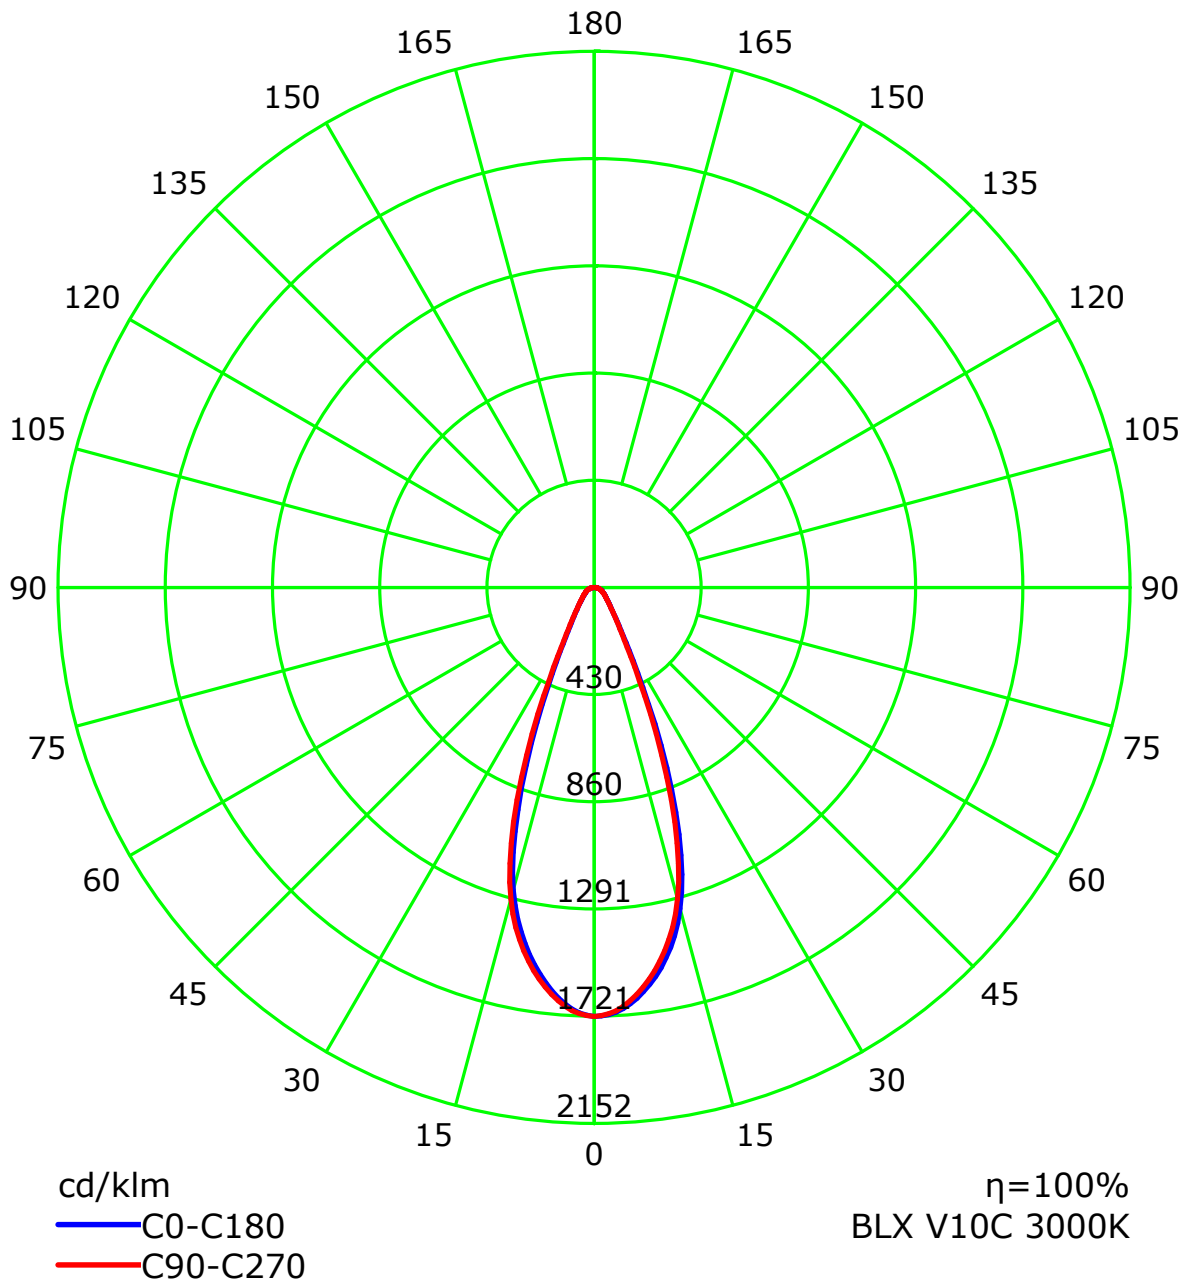

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

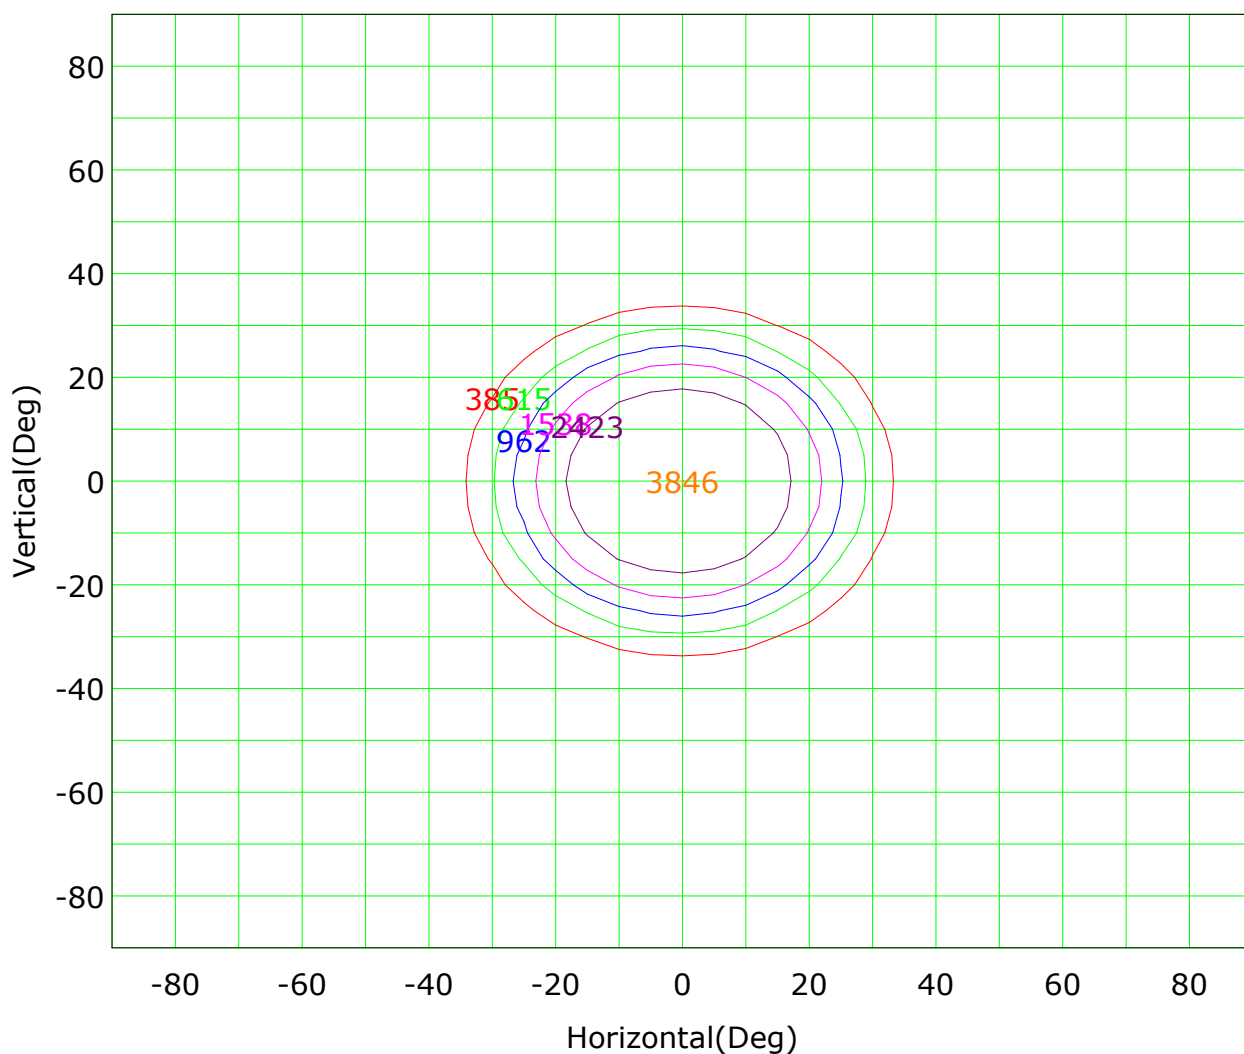


Imax (100%): 3846 cd

— (10%): 385 cd	— (16%): 615 cd
— (25%): 962 cd	— (40%): 1538 cd
— (63%): 2423 cd	— (100%): 3846 cd

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

IsoLux Plot

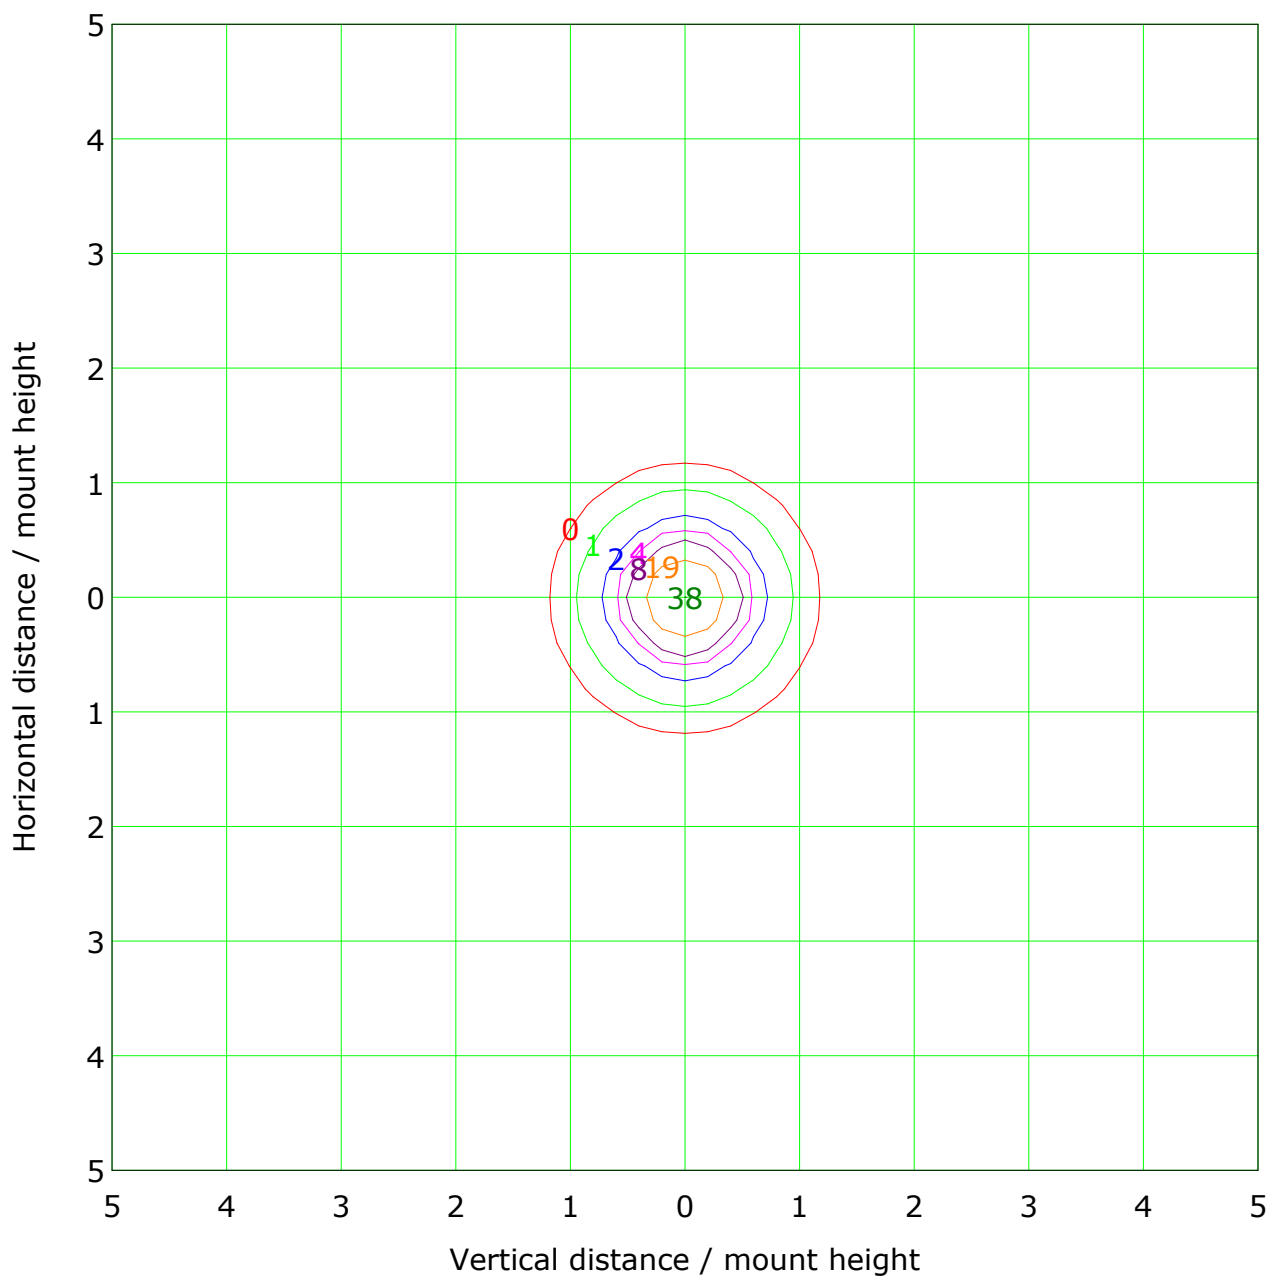


Mounting Height: 10.0m Max Lux(100%): 38.5 lx

(1%): 0.4 lx	(2%): 0.8 lx
(5%): 1.9 lx	(10%): 3.8 lx
(20%): 7.7 lx	(50%): 19.2 lx
(100%): 38.5 lx	


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Illuminance at a Distance

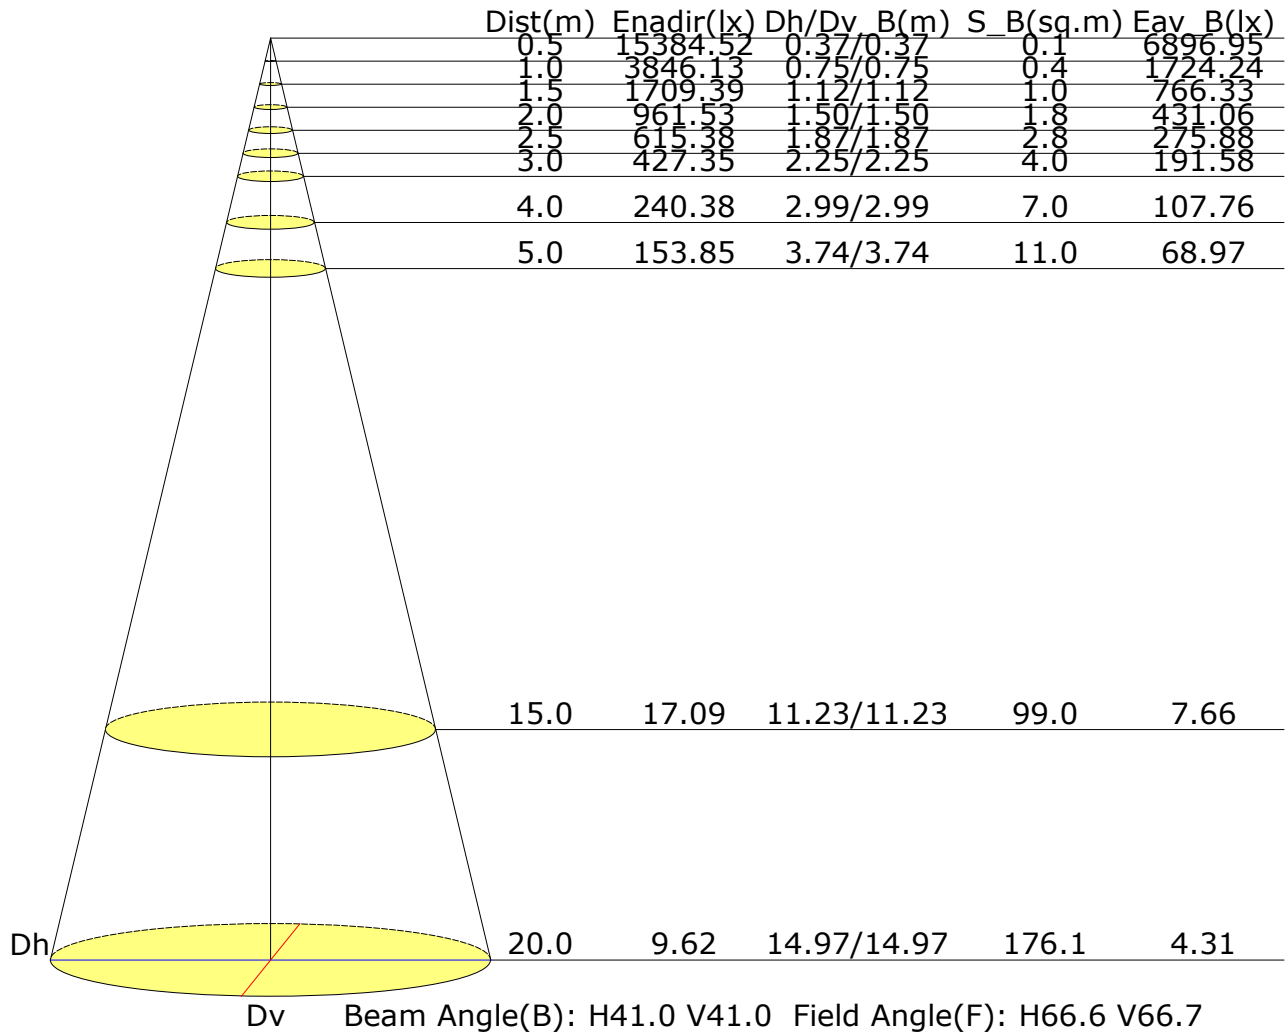

Vertical IsoLux Plot

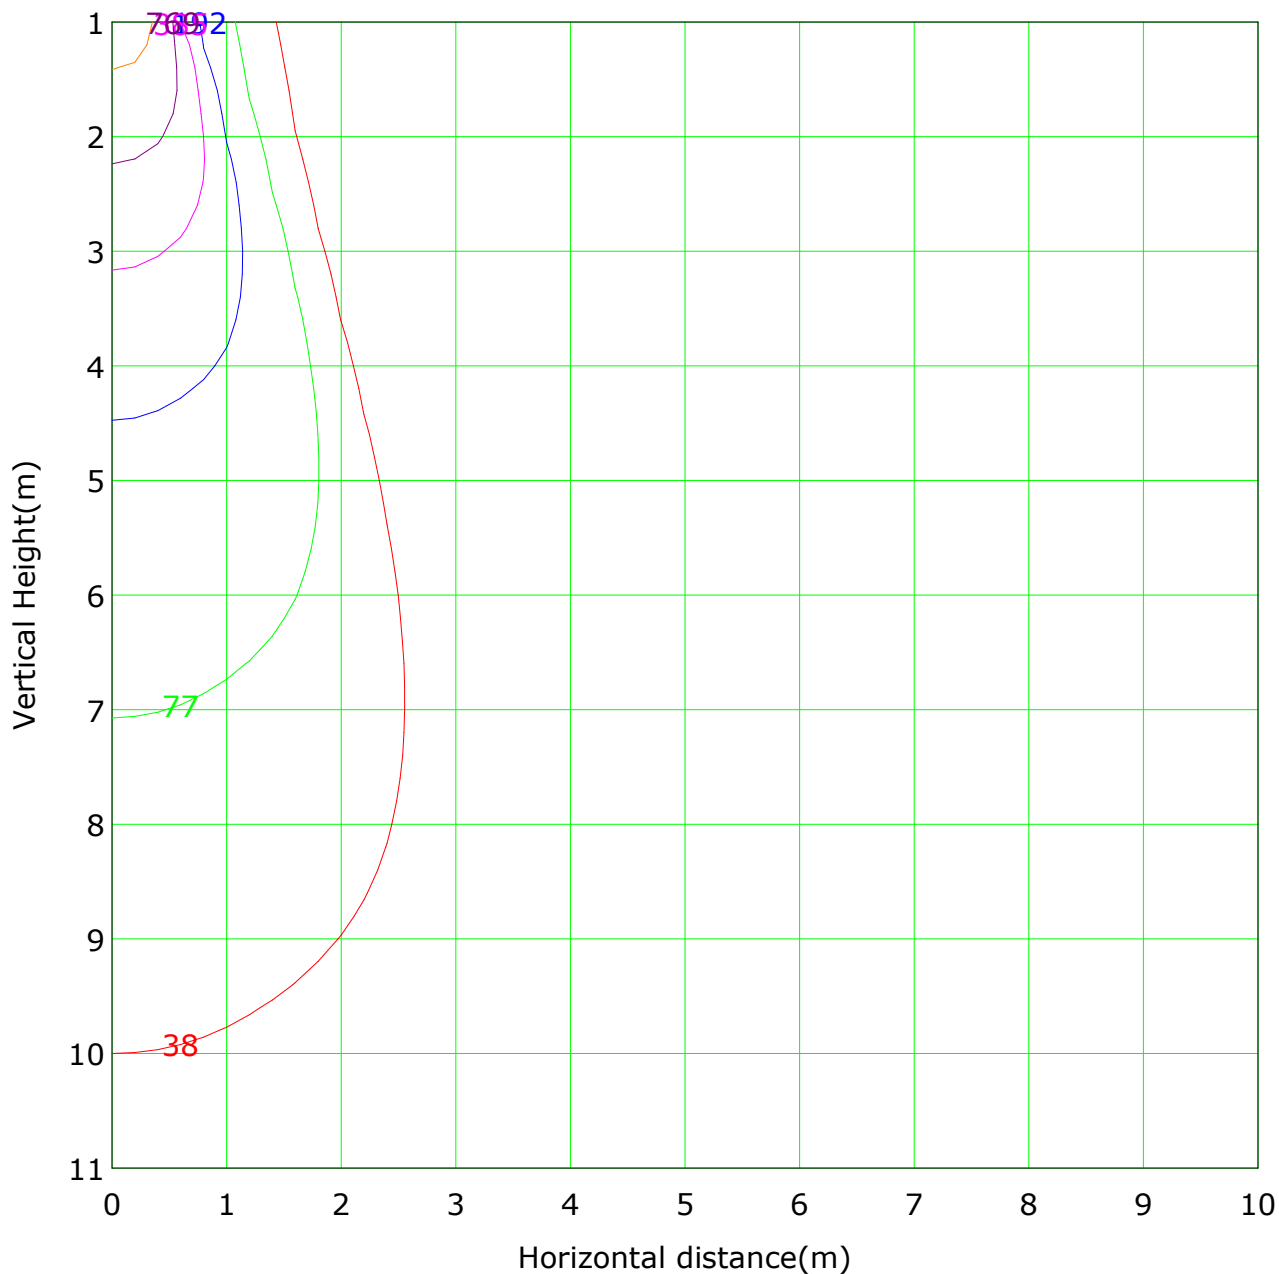


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3846.1 lx
 (1%): 38.5 lx (2%): 76.9 lx
 (5%): 192.3 lx (10%): 384.6 lx
 (20%): 769.2 lx (50%): 1923.1 lx
 (100%): 3846.1 lx

C Plane (°): 0.0-180.0: 180.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: CHL-6E
 Distance: 3.010 m
 Humidity:
 Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

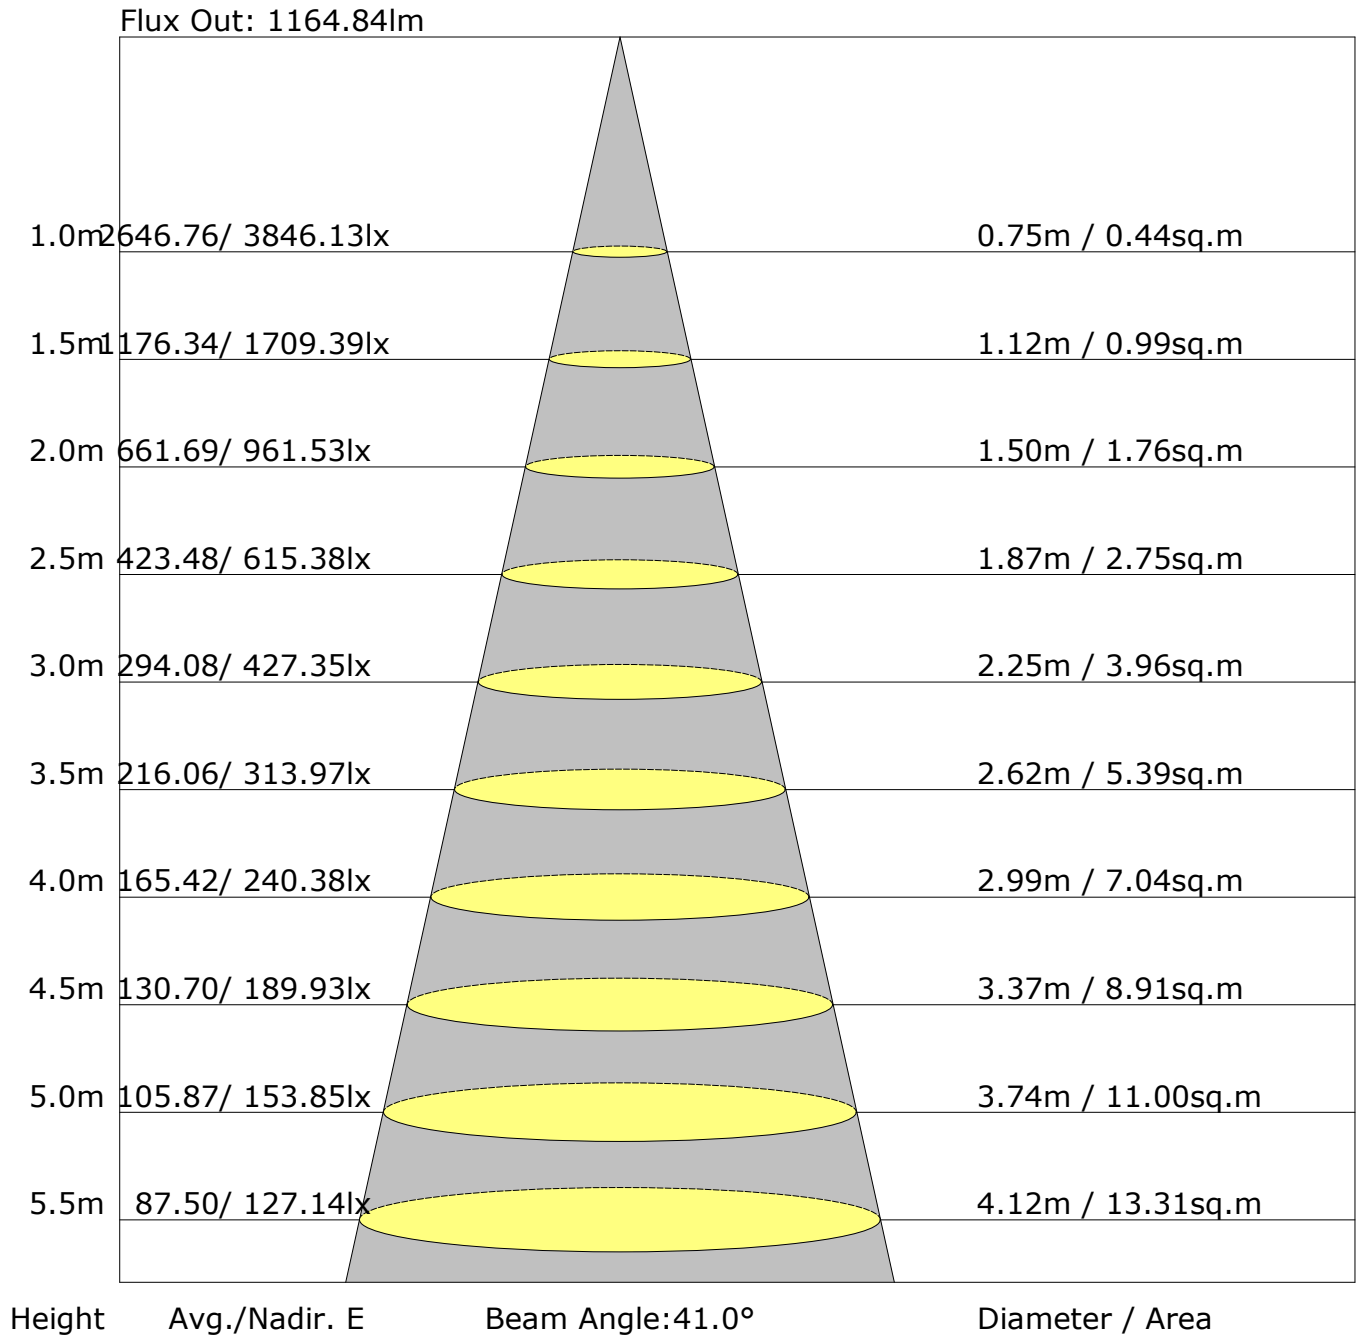

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	23.9	24.8	24.1	25.0	25.2	23.7	24.6	24.0	24.8	25.0
3H	25.4	26.2	25.6	26.4	26.7	25.2	26.0	25.5	26.2	26.5
4H	26.1	26.8	26.4	27.1	27.4	25.9	26.6	26.2	26.9	27.2
6H	26.6	27.4	27.0	27.6	27.9	26.4	27.1	26.7	27.4	27.7
8H	26.9	27.5	27.2	27.8	28.2	26.6	27.3	26.9	27.6	27.9
12H	27.0	27.7	27.4	28.0	28.3	26.7	27.4	27.1	27.7	28.0
X=4H Y=2H	24.4	25.2	24.7	25.5	25.7	24.3	25.1	24.6	25.4	25.6
3H	26.2	26.8	26.5	27.1	27.5	26.0	26.7	26.4	27.0	27.3
4H	27.0	27.6	27.4	27.9	28.3	26.8	27.4	27.2	27.8	28.1
6H	27.7	28.3	28.1	28.6	29.0	27.5	28.0	27.9	28.4	28.8
8H	28.0	28.5	28.4	28.9	29.3	27.8	28.2	28.2	28.6	29.0
12H	28.2	28.7	28.7	29.1	29.5	28.0	28.4	28.4	28.8	29.2
X=8H Y=4H	27.3	27.8	27.8	28.2	28.6	27.2	27.7	27.6	28.1	28.5
6H	28.2	28.6	28.7	29.0	29.5	28.0	28.4	28.5	28.8	29.3
8H	28.6	28.9	29.1	29.4	29.9	28.3	28.7	28.8	29.1	29.6
12H	28.9	29.2	29.4	29.7	30.2	28.7	29.0	29.1	29.4	29.9
X=12H Y=4H	27.4	27.8	27.8	28.2	28.6	27.2	27.6	27.7	28.1	28.5
6H	28.3	28.6	28.8	29.1	29.5	28.1	28.4	28.6	28.9	29.4
8H	28.7	29.0	29.2	29.5	30.0	28.5	28.8	29.0	29.3	29.8
Variations with the observer position at spacings:										
S=1.0H	+0.3/-0.3					+0.3/-0.3				
S=1.5H	+0.6/-0.6					+0.6/-0.6				
S=2.0H	+1.1/-0.9					+1.1/-0.9				

Calculate in accordance with CIE Pub.117. The table is revised with 2234Im ($8\log(F/F_0) = 2.8$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	1139	51.0
	FL (0°-30°)	835	37.4
	FM (30°-60°)	230	10.3
	FH (60°-80°)	64	2.9
	FVH (80°-90°)	9	0.4
	BACK LIGHT	1095	49.0
	BL (0°-30°)	802	35.9
	BM (30°-60°)	222	9.9
	BH (60°-80°)	62	2.8
	BVH (80°-90°)	9	0.4
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3843.4	3.7	3.7	0.16	0.16
1.0-2.0	3833.0	11.0	14.7	0.49	0.66
2.0-3.0	3812.7	18.2	32.9	0.82	1.47
3.0-4.0	3782.5	25.3	58.2	1.13	2.61
4.0-5.0	3743.1	32.2	90.4	1.44	4.05
5.0-6.0	3696.0	38.8	129.3	1.74	5.79
6.0-7.0	3641.0	45.2	174.5	2.02	7.81
7.0-8.0	3579.4	51.2	225.7	2.29	10.10
8.0-9.0	3513.3	56.9	282.7	2.55	12.65
9.0-10.0	3441.2	62.3	345.0	2.79	15.44
10.0-11.0	3361.1	67.2	412.1	3.01	18.45
11.0-12.0	3274.1	71.6	483.7	3.20	21.65
12.0-13.0	3179.6	75.5	559.2	3.38	25.03
13.0-14.0	3074.6	78.7	637.9	3.52	28.56
14.0-15.0	2956.7	81.2	719.1	3.63	32.19
15.0-16.0	2822.6	82.7	801.8	3.70	35.89
16.0-17.0	2669.7	83.1	884.9	3.72	39.62
17.0-18.0	2500.3	82.4	967.4	3.69	43.31
18.0-19.0	2318.0	80.7	1048.0	3.61	46.92
19.0-20.0	2125.5	77.8	1125.8	3.48	50.40
20.0-21.0	1926.1	74.0	1199.8	3.31	53.71
21.0-22.0	1724.5	69.3	1269.1	3.10	56.81
22.0-23.0	1525.2	64.0	1333.1	2.87	59.68
23.0-24.0	1334.9	58.4	1391.5	2.61	62.29
24.0-25.0	1159.6	52.7	1444.2	2.36	64.65
25.0-26.0	1002.7	47.3	1491.6	2.12	66.77
26.0-27.0	867.1	42.4	1534.0	1.90	68.67
27.0-28.0	752.7	38.1	1572.1	1.71	70.38
28.0-29.0	657.9	34.4	1606.5	1.54	71.92
29.0-30.0	580.0	31.3	1637.9	1.40	73.32
30.0-31.0	516.0	28.7	1666.6	1.29	74.61
31.0-32.0	462.0	26.5	1693.1	1.18	75.79
32.0-33.0	416.7	24.6	1717.6	1.10	76.89
33.0-34.0	378.6	22.9	1740.5	1.03	77.92
34.0-35.0	345.8	21.5	1762.0	0.96	78.88
35.0-36.0	317.5	20.2	1782.2	0.91	79.78

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	293.0	19.1	1801.3	0.86	80.64
37.0-38.0	271.8	18.1	1819.5	0.81	81.45
38.0-39.0	253.1	17.3	1836.7	0.77	82.22
39.0-40.0	236.6	16.5	1853.2	0.74	82.96
40.0-41.0	222.0	15.8	1869.1	0.71	83.67
41.0-42.0	209.1	15.2	1884.3	0.68	84.35
42.0-43.0	197.7	14.6	1898.9	0.66	85.01
43.0-44.0	187.1	14.1	1913.0	0.63	85.64
44.0-45.0	177.3	13.6	1926.6	0.61	86.25
45.0-46.0	168.2	13.2	1939.8	0.59	86.84
46.0-47.0	159.9	12.7	1952.5	0.57	87.41
47.0-48.0	152.5	12.3	1964.8	0.55	87.96
48.0-49.0	146.0	12.0	1976.8	0.54	88.50
49.0-50.0	140.1	11.7	1988.5	0.52	89.02
50.0-51.0	134.7	11.4	1999.9	0.51	89.53
51.0-52.0	129.6	11.1	2011.0	0.50	90.03
52.0-53.0	124.7	10.9	2021.9	0.49	90.51
53.0-54.0	119.9	10.6	2032.5	0.47	90.99
54.0-55.0	115.0	10.3	2042.7	0.46	91.44
55.0-56.0	110.0	9.9	2052.7	0.44	91.89
56.0-57.0	105.2	9.6	2062.3	0.43	92.32
57.0-58.0	101.0	9.3	2071.6	0.42	92.74
58.0-59.0	97.2	9.1	2080.7	0.41	93.15
59.0-60.0	93.7	8.9	2089.6	0.40	93.54
60.0-61.0	90.7	8.7	2098.2	0.39	93.93
61.0-62.0	88.1	8.5	2106.7	0.38	94.31
62.0-63.0	85.4	8.3	2115.0	0.37	94.68
63.0-64.0	82.5	8.1	2123.1	0.36	95.04
64.0-65.0	79.6	7.9	2131.0	0.35	95.40
65.0-66.0	76.7	7.7	2138.6	0.34	95.74
66.0-67.0	73.9	7.4	2146.1	0.33	96.07
67.0-68.0	70.9	7.2	2153.2	0.32	96.39
68.0-69.0	67.7	6.9	2160.2	0.31	96.70
69.0-70.0	64.5	6.6	2166.8	0.30	97.00
70.0-71.0	61.4	6.3	2173.1	0.28	97.28
71.0-72.0	58.1	6.0	2179.2	0.27	97.55

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	3846.1	3846.1								
G1.0	3843.3	3837.9								
G2.0	3832.2	3818.5								
G3.0	3812.9	3787.3								
G4.0	3784.7	3744.9								
G5.0	3747.9	3694.6								
G6.0	3704.3	3637.1								
G7.0	3650.5	3572.0								
G8.0	3593.6	3501.6								
G9.0	3531.3	3426.9								
G10.0	3462.8	3343.8								
G11.0	3384.4	3253.4								
G12.0	3300.4	3158.0								
G13.0	3205.8	3054.3								
G14.0	3100.5	2937.9								
G15.0	2980.9	2807.6								
G16.0	2845.0	2657.0								
G17.0	2692.2	2484.7								
G18.0	2523.4	2300.9								
G19.0	2341.1	2106.8								
G20.0	2145.5	1908.6								
G21.0	1946.0	1704.2								
G22.0	1743.9	1503.8								
G23.0	1537.3	1316.0								
G24.0	1341.1	1145.4								
G25.0	1160.7	991.1								
G26.0	999.3	859.8								
G27.0	860.5	748.8								
G28.0	746.3	655.4								
G29.0	651.5	578.3								
G30.0	575.2	515.1								
G31.0	512.1	461.4								
G32.0	458.4	416.0								
G33.0	413.5	378.8								
G34.0	376.1	345.9								
G35.0	343.2	318.1								
G36.0	314.7	294.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	290.1	273.1								
G38.0	268.8	255.1								
G39.0	250.0	238.4								
G40.0	234.1	223.9								
G41.0	219.9	210.2								
G42.0	208.4	198.0								
G43.0	198.2	186.0								
G44.0	188.3	176.0								
G45.0	178.1	166.8								
G46.0	169.4	158.6								
G47.0	160.6	151.0								
G48.0	153.3	144.9								
G49.0	146.8	138.9								
G50.0	141.3	133.3								
G51.0	135.9	128.2								
G52.0	131.2	123.0								
G53.0	127.2	117.6								
G54.0	122.4	112.6								
G55.0	117.1	107.8								
G56.0	111.7	103.3								
G57.0	106.8	99.2								
G58.0	102.6	95.5								
G59.0	98.6	92.0								
G60.0	95.2	88.9								
G61.0	91.7	86.9								
G62.0	88.6	85.0								
G63.0	85.6	82.3								
G64.0	83.0	79.0								
G65.0	80.6	75.7								
G66.0	78.1	72.5								
G67.0	75.4	69.7								
G68.0	72.1	66.5								
G69.0	68.8	63.4								
G70.0	65.9	60.1								
G71.0	62.8	56.8								
G72.0	59.6	53.3								
G73.0	56.5	50.3								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

Unit: cd

[illegible]

Inspector: