Report No.: Test Time: 2026-05-06 17:06

Luminaire Property


Luminaire Manufacturer:
Luminaire Description: 61.02303 4000K
Luminous Length (mm): -49
Luminous Width (mm): -49
Voltage: 231.7 V
Current: 0.088 A
Power: 9.90 W
Power Factor: 0.486

Photometric Results

CIE Class: Direct
Total Rated Lamp Lumens: 879.9 lm
Measurement Flux: 879.9 lm
Efficiency: 100%
Downward Ratio: 100%
Upward Ratio: 0%
Horizontal Diffuse Angle(50%): H30.8
Vertical Diffuse Angle(50%): V30.8
Luminaire Efficacy Rating (LER): 88.93
Central Intensity: 3427.99 cd
Max. Intensity: 3427.99 cd
Pos of Max. Intensity: H0 V0
S/MH(C0/C180): 0.52
S/MH(C90/C270): 0.52


Picture Of Luminaire


Luminous Intensity Distribution Curve

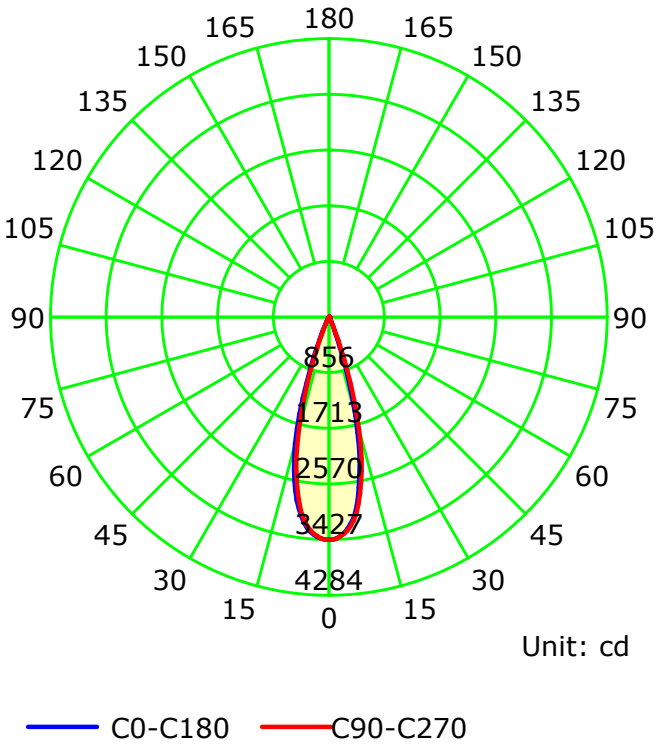

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Luminous Intensity Distribution Curve

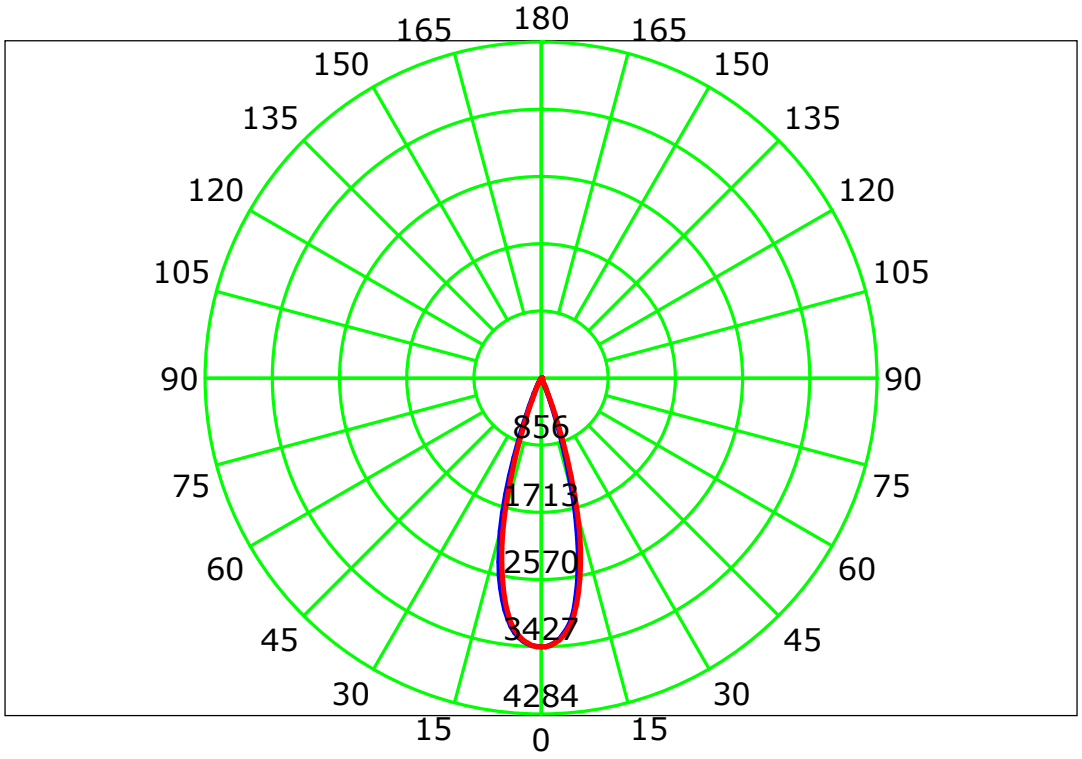


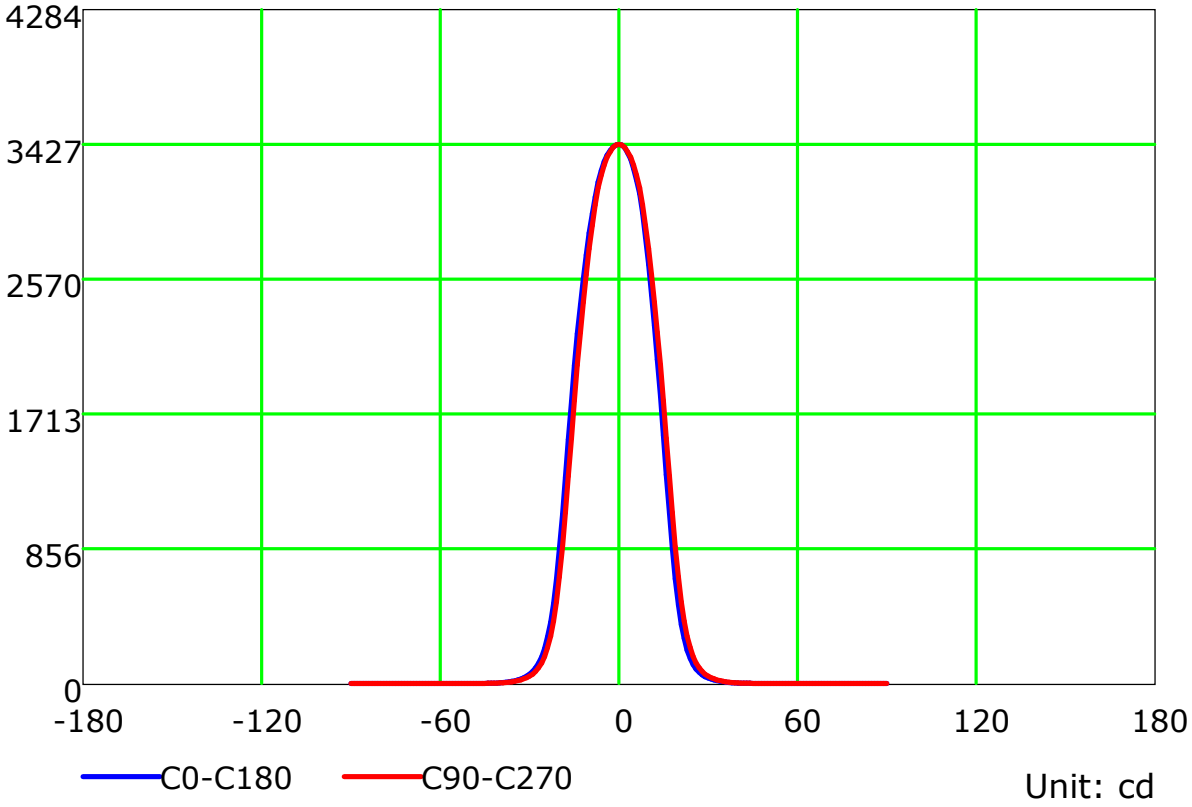

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

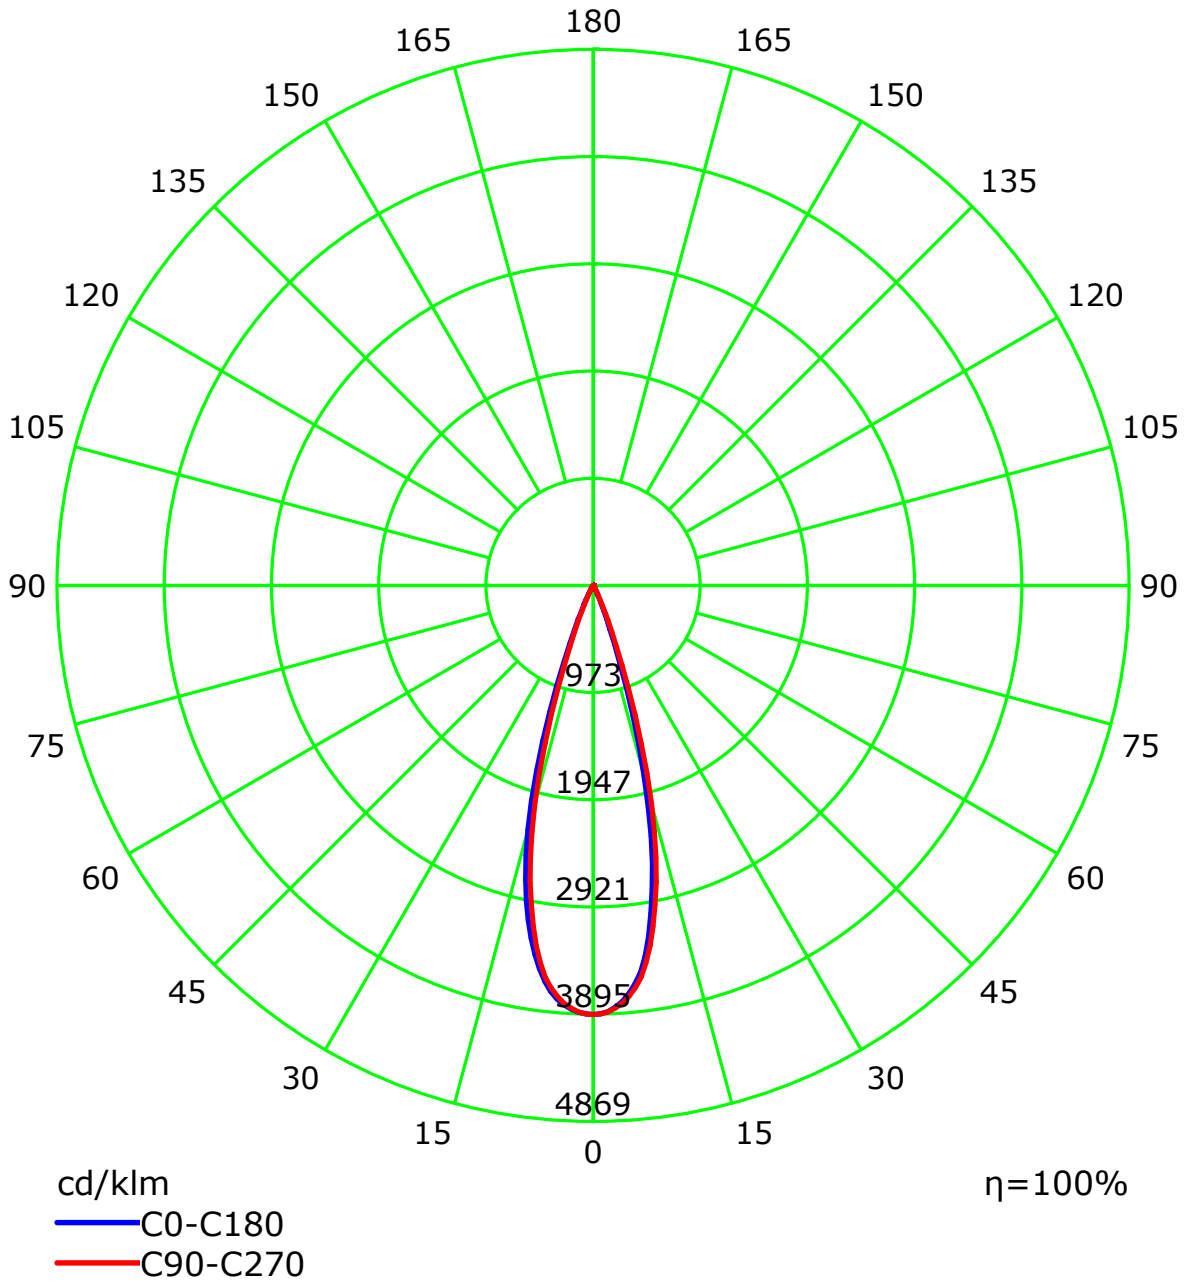

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

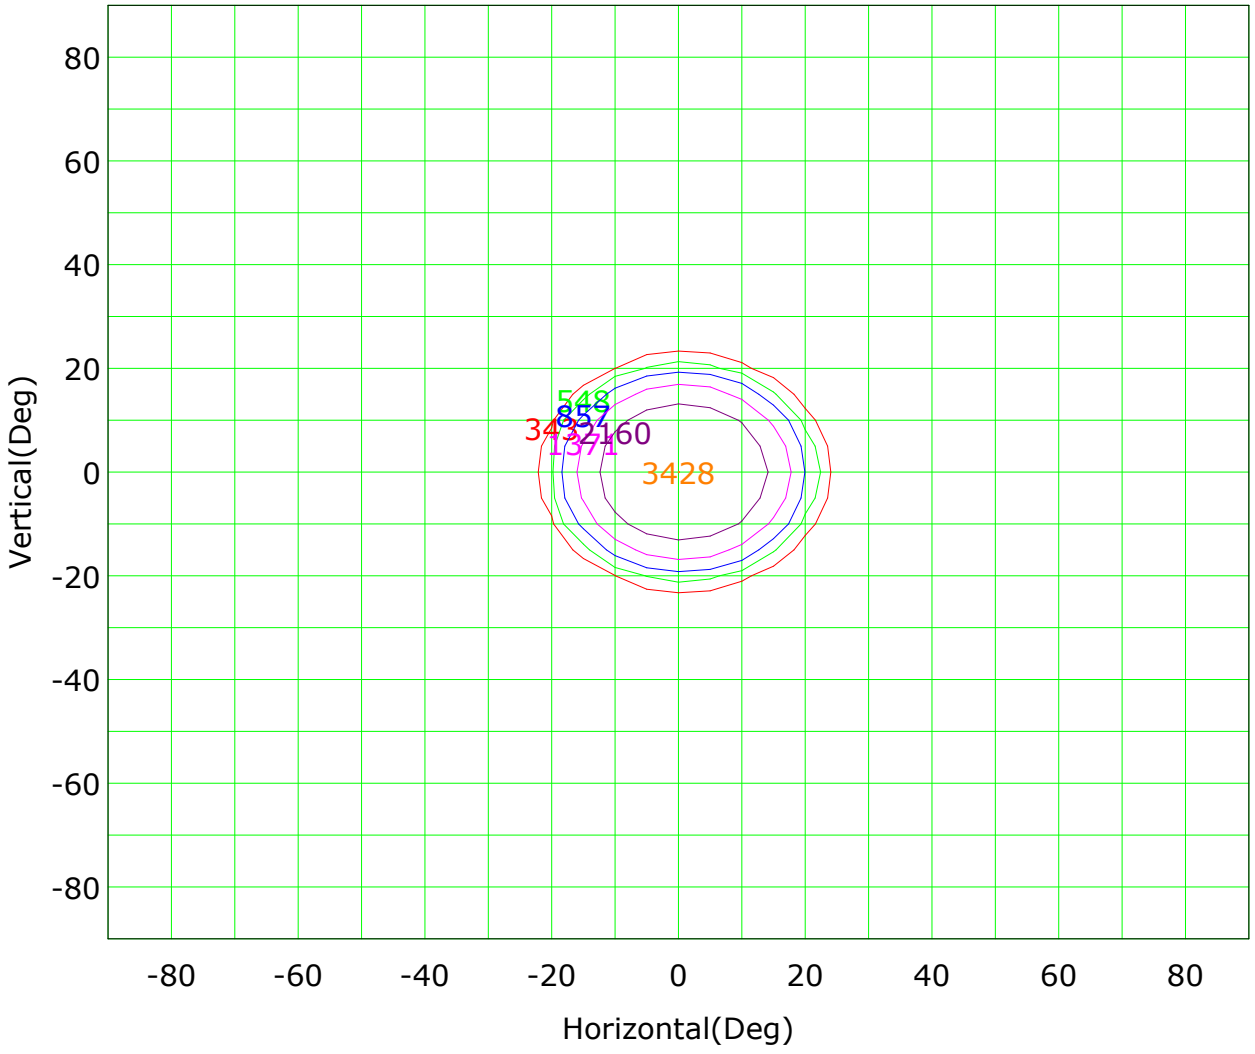


Imax (100%): 3428 cd

(10%): 343 cd
(16%): 548 cd
(25%): 857 cd
(40%): 1371 cd
(63%): 2160 cd
(100%): 3428 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

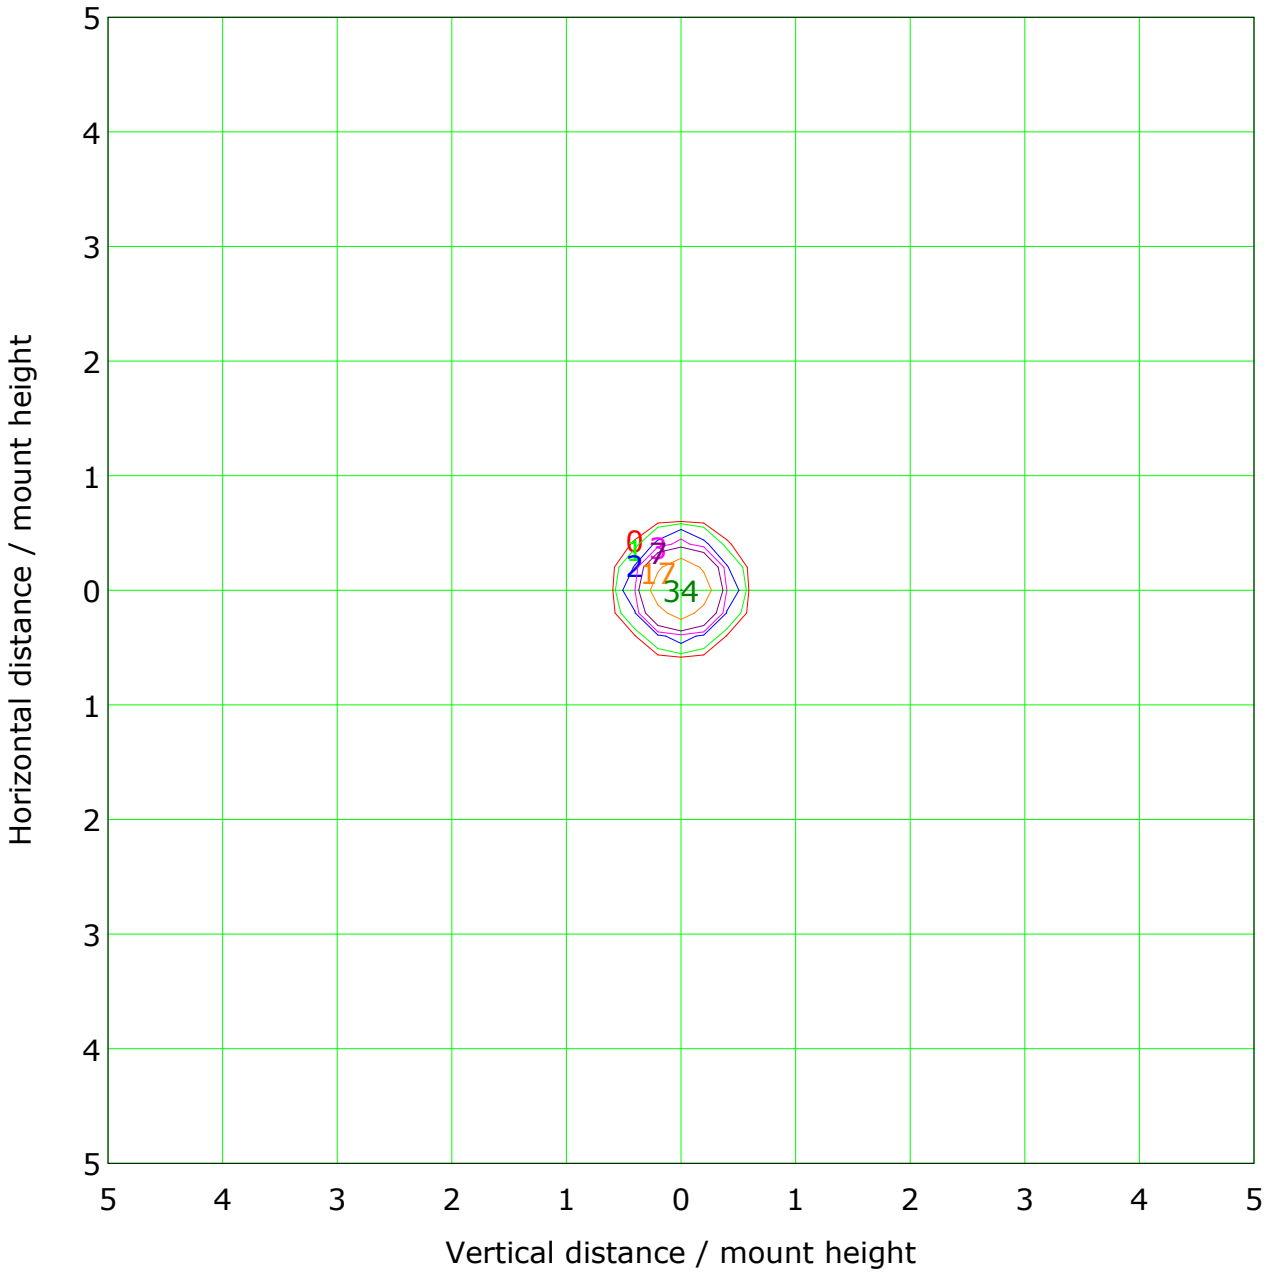


Mounting Height: 10.0m Max Lux(100%): 34.3 lx

(1%): 0.3 lx
(2%): 0.7 lx
(5%): 1.7 lx
(10%): 3.4 lx
(20%): 6.9 lx
(50%): 17.1 lx
(100%): 34.3 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

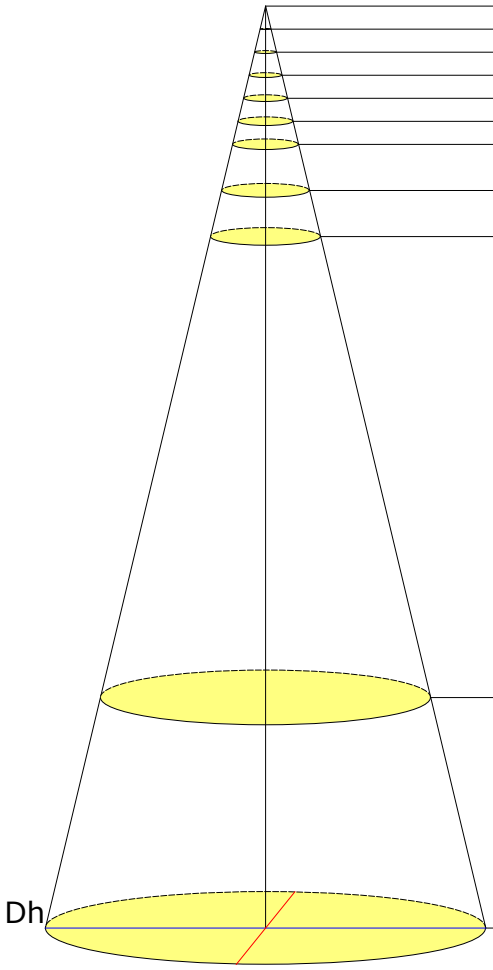


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	13711.96	0.28/0.27	0.1	6468.79
1.0	3427.99	0.55/0.55	0.2	1617.20
1.5	1523.55	0.83/0.82	0.5	718.75
2.0	857.00	1.10/1.10	1.0	404.30
2.5	548.48	1.38/1.37	1.5	258.75
3.0	380.89	1.65/1.65	2.1	179.69
4.0	214.25	2.20/2.20	3.8	101.07
5.0	137.12	2.75/2.75	6.0	64.69
15.0	15.24	8.26/8.24	53.6	7.19
20.0	8.57	11.01/10.99	95.3	4.04

Beam Angle(B): H30.8 V30.7 Field Angle(F): H44.9 V45.1

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

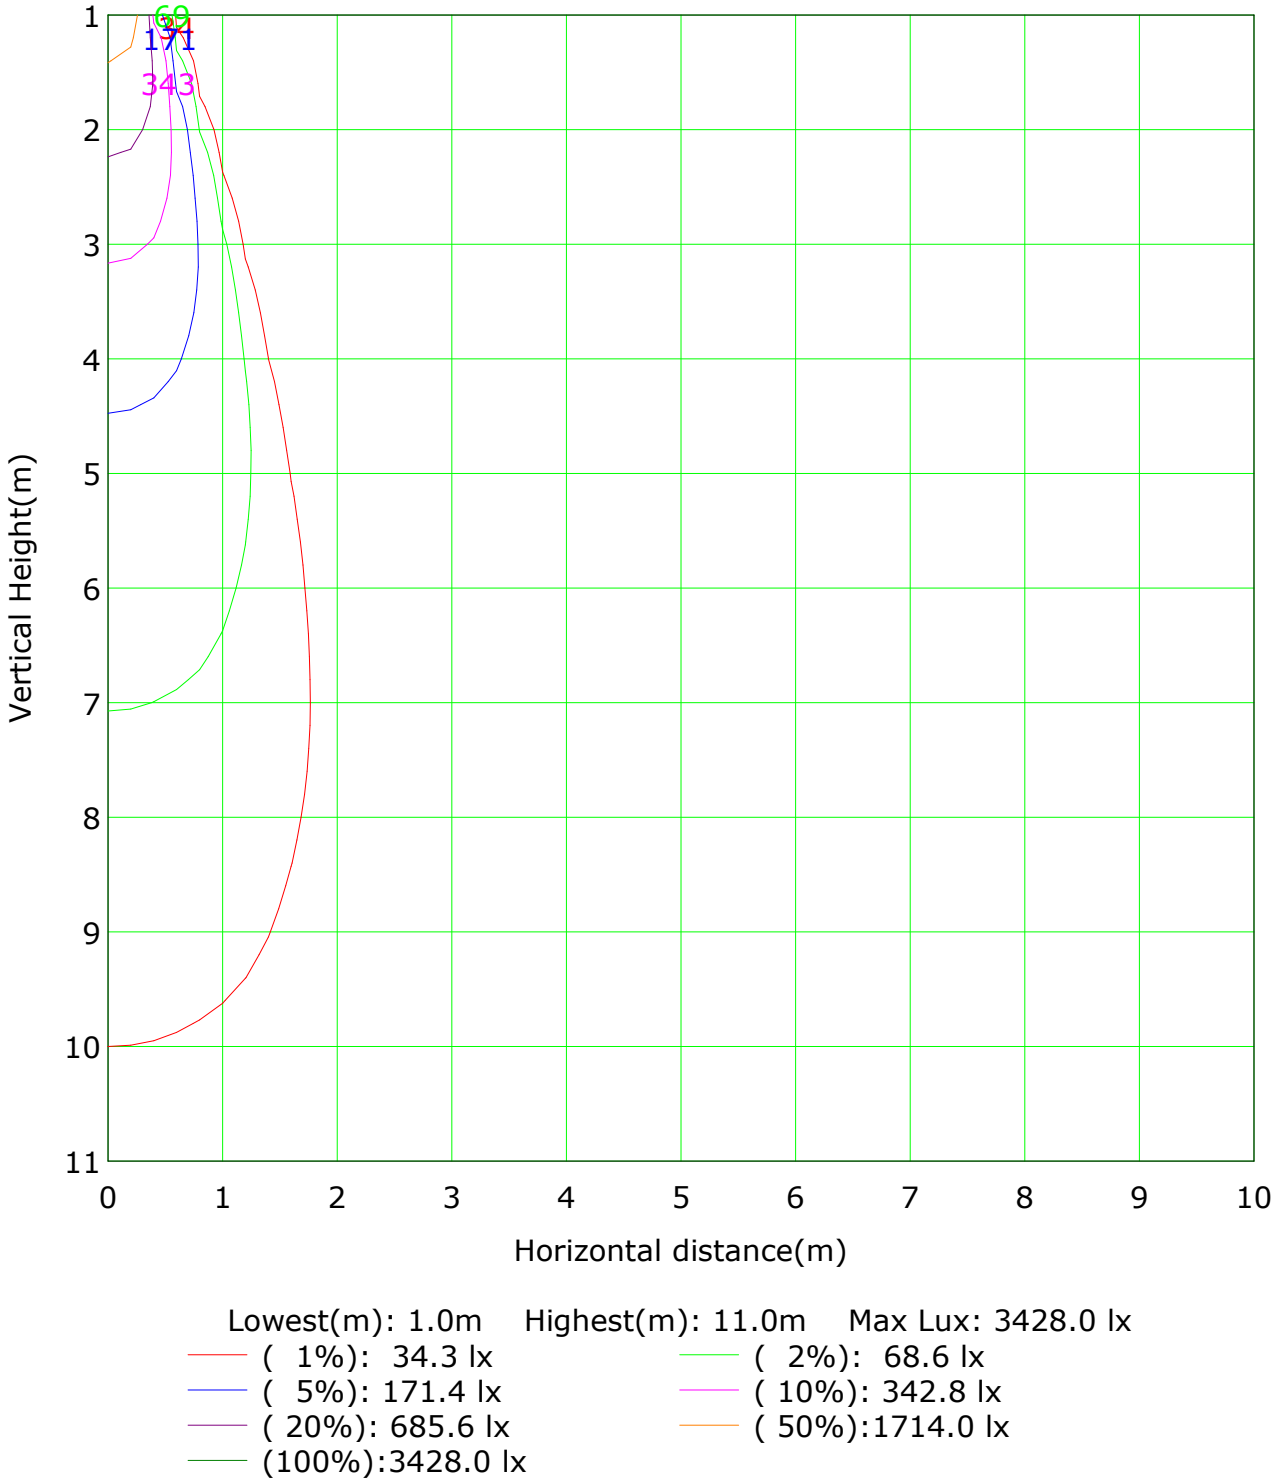

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3428.0 lx

(1%): 34.3 lx
(2%): 68.6 lx
(5%): 171.4 lx
(10%): 342.8 lx
(20%): 685.6 lx
(50%):1714.0 lx
(100%):3428.0 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.9	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.8	7.7
-20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	145.6	135.7
-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	293.6	285.7
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	284.0	275.6
10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	118.1	107.9
20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	13.2	1.6
30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	879	814
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 589.25lm

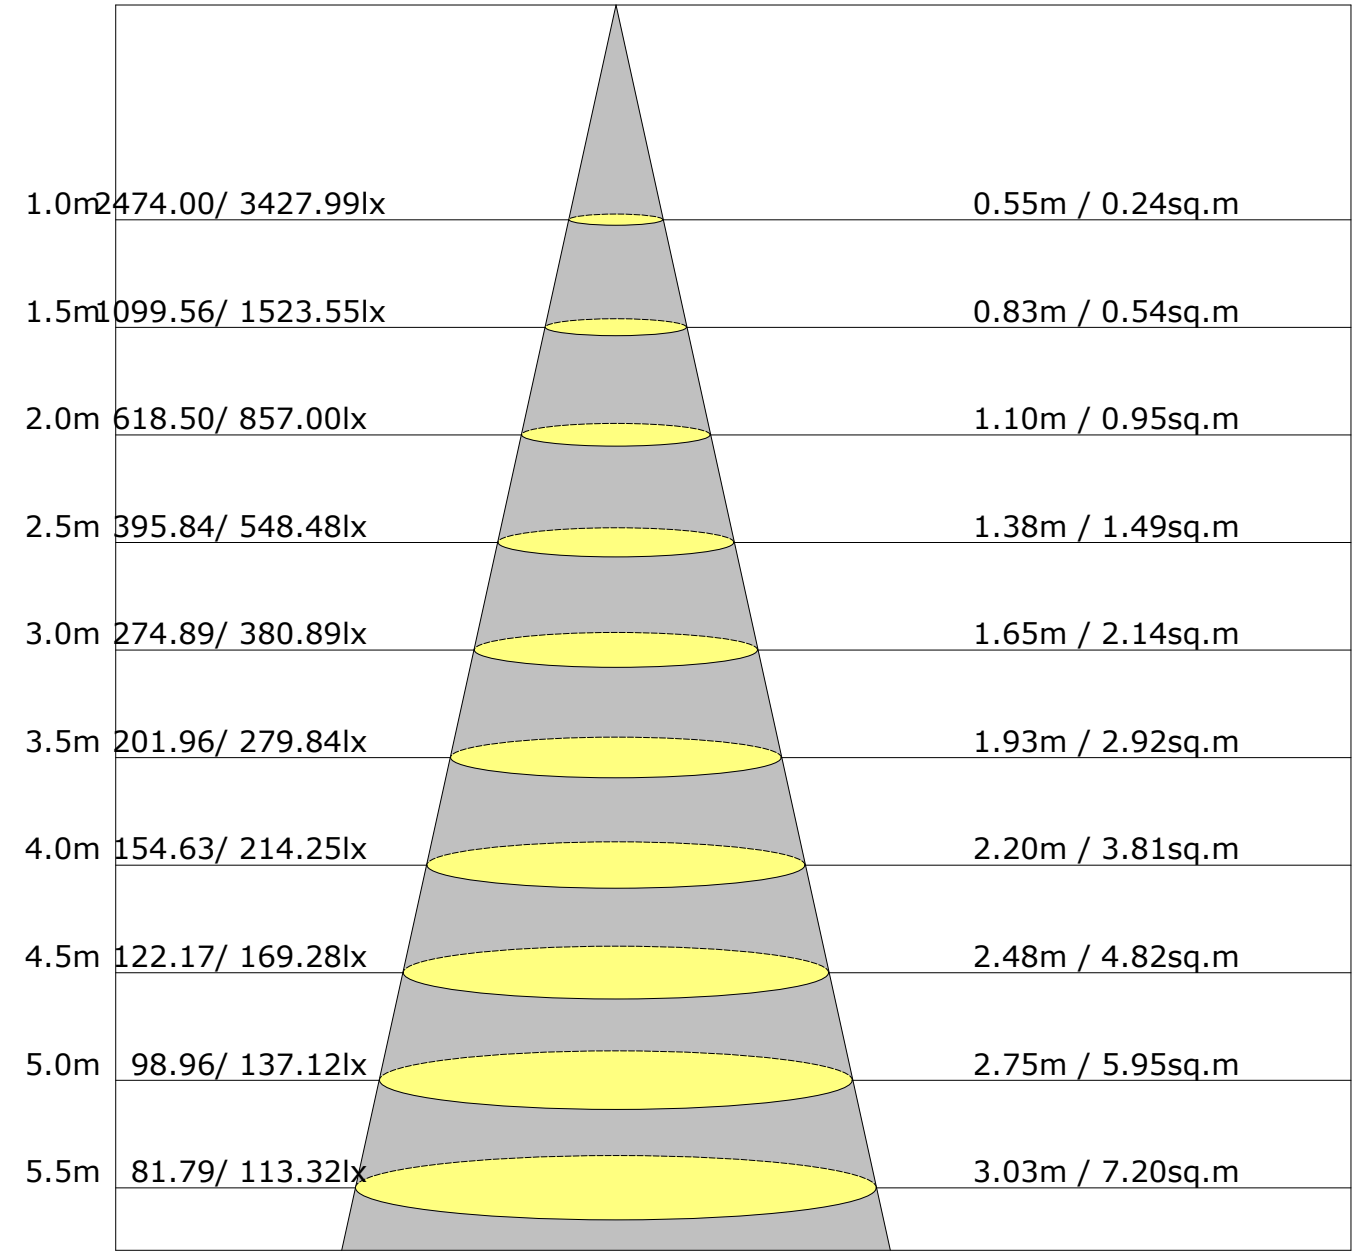

Height Avg./Nadir. E Beam Angle:30.8° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	1.0	1.5	1.2	1.7	1.9	1.8	2.4	2.0	2.6	2.8
3H	0.9	1.4	1.2	1.7	1.9	1.7	2.2	2.0	2.5	2.7
4H	0.8	1.3	1.1	1.6	1.8	1.6	2.1	1.9	2.4	2.6
6H	0.8	1.2	1.1	1.5	1.8	1.6	2.0	1.9	2.3	2.6
8H	0.7	1.2	1.0	1.5	1.7	1.5	2.0	1.9	2.3	2.6
12H	0.7	1.1	1.0	1.4	1.7	1.5	1.9	1.8	2.2	2.5
X=4H Y=2H	0.8	1.3	1.1	1.6	1.8	1.7	2.2	2.0	2.4	2.7
3H	0.8	1.2	1.1	1.5	1.8	1.5	2.0	1.9	2.3	2.6
4H	0.7	1.1	1.0	1.4	1.7	1.5	1.8	1.8	2.2	2.5
6H	0.6	0.9	1.0	1.3	1.7	1.4	1.7	1.8	2.1	2.5
8H	0.5	0.8	0.9	1.2	1.6	1.3	1.6	1.7	2.0	2.4
12H	0.5	0.8	0.9	1.2	1.6	1.3	1.6	1.7	2.0	2.4
X=8H Y=4H	0.5	0.8	1.0	1.2	1.6	1.3	1.6	1.7	2.0	2.4
6H	0.4	0.7	0.9	1.1	1.6	1.2	1.5	1.7	1.9	2.4
8H	0.4	0.6	0.8	1.0	1.5	1.2	1.4	1.6	1.8	2.3
12H	0.3	0.5	0.8	1.0	1.5	1.1	1.3	1.6	1.8	2.3
X=12H Y=4H	0.5	0.8	0.9	1.2	1.6	1.3	1.6	1.7	2.0	2.4
6H	0.4	0.6	0.8	1.0	1.5	1.2	1.4	1.6	1.8	2.3
8H	0.3	0.5	0.8	1.0	1.5	1.1	1.3	1.6	1.8	2.3
Variations with the observer position at spacings:										
S=1.0H	+5.7/-7.7					+6.2/-9.8				
S=1.5H	+8.5/-8.3					+8.9/-9.6				
S=2.0H	+10.4/-27.8					+10.9/-20.9				

Calculate in accordance with CIE Pub.117. The table is revised with 880lm (8log(F/F0) = -0.4).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

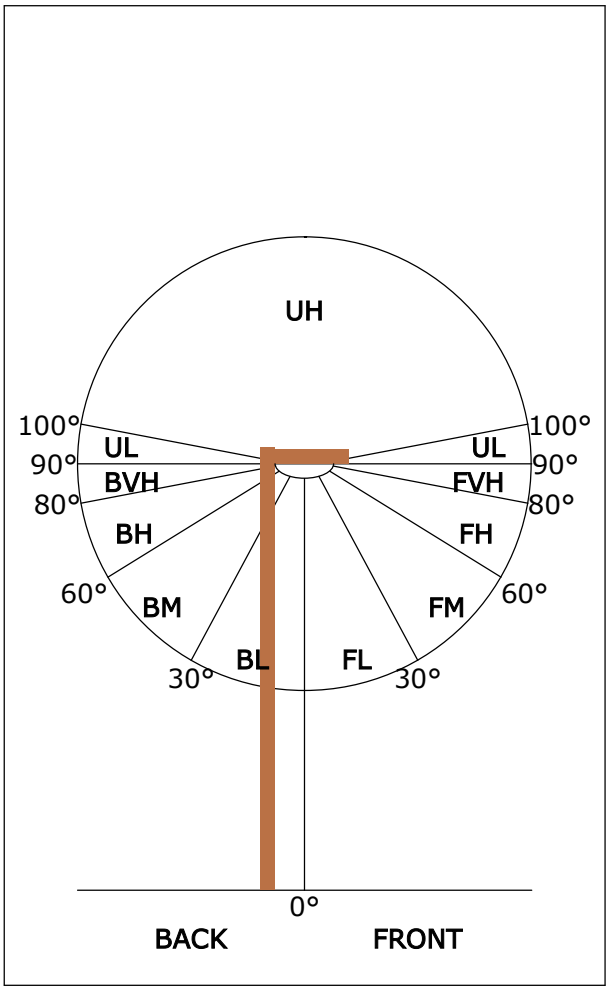

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	417	47.4
FL (0°-30°)	411	46.7
FM (30°-60°)	6	0.7
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	462	52.6
BL (0°-30°)	455	51.7
BM (30°-60°)	7	0.8
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3426.2	3.3	3.3	0.37	0.37
1.0-2.0	3417.5	9.8	13.1	1.11	1.49
2.0-3.0	3396.7	16.2	29.3	1.85	3.33
3.0-4.0	3365.1	22.5	51.9	2.56	5.89
4.0-5.0	3322.0	28.6	80.4	3.25	9.14
5.0-6.0	3264.7	34.3	114.8	3.90	13.04
6.0-7.0	3192.6	39.6	154.4	4.50	17.55
7.0-8.0	3098.2	44.3	198.7	5.04	22.59
8.0-9.0	2979.5	48.3	247.0	5.49	28.07
9.0-10.0	2839.8	51.4	298.4	5.84	33.91
10.0-11.0	2682.4	53.6	352.0	6.09	40.01
11.0-12.0	2513.0	54.9	407.0	6.24	46.25
12.0-13.0	2330.1	55.3	462.3	6.29	52.54
13.0-14.0	2130.4	54.5	516.8	6.20	58.73
14.0-15.0	1913.6	52.5	569.4	5.97	64.70
15.0-16.0	1680.9	49.3	618.6	5.60	70.30
16.0-17.0	1440.4	44.9	663.5	5.10	75.40
17.0-18.0	1203.6	39.7	703.2	4.51	79.91
18.0-19.0	978.5	34.0	737.2	3.87	83.78
19.0-20.0	773.9	28.3	765.5	3.22	87.00
20.0-21.0	598.9	23.0	788.5	2.61	89.61
21.0-22.0	458.8	18.4	807.0	2.10	91.71
22.0-23.0	349.8	14.7	821.7	1.67	93.38
23.0-24.0	264.8	11.6	833.2	1.32	94.69
24.0-25.0	200.3	9.1	842.4	1.04	95.73
25.0-26.0	151.8	7.2	849.5	0.81	96.54
26.0-27.0	115.9	5.7	855.2	0.64	97.19
27.0-28.0	89.4	4.5	859.7	0.51	97.70
28.0-29.0	69.5	3.6	863.4	0.41	98.12
29.0-30.0	54.7	3.0	866.3	0.34	98.45
30.0-31.0	43.3	2.4	868.7	0.27	98.73
31.0-32.0	34.4	2.0	870.7	0.22	98.95
32.0-33.0	27.5	1.6	872.3	0.18	99.13
33.0-34.0	21.9	1.3	873.6	0.15	99.28
34.0-35.0	17.3	1.1	874.7	0.12	99.41
35.0-36.0	13.6	0.9	875.6	0.10	99.51

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	10.5	0.7	876.3	0.08	99.58
37.0-38.0	8.1	0.5	876.8	0.06	99.65
38.0-39.0	6.3	0.4	877.2	0.05	99.69
39.0-40.0	4.9	0.3	877.6	0.04	99.73
40.0-41.0	3.9	0.3	877.9	0.03	99.76
41.0-42.0	3.3	0.2	878.1	0.03	99.79
42.0-43.0	2.9	0.2	878.3	0.02	99.82
43.0-44.0	2.5	0.2	878.5	0.02	99.84
44.0-45.0	2.1	0.2	878.7	0.02	99.86
45.0-46.0	1.7	0.1	878.8	0.02	99.87
46.0-47.0	1.4	0.1	878.9	0.01	99.88
47.0-48.0	1.2	0.1	879.0	0.01	99.89
48.0-49.0	1.0	0.1	879.1	0.01	99.90
49.0-50.0	0.9	0.1	879.2	0.01	99.91
50.0-51.0	0.7	0.1	879.2	0.01	99.92
51.0-52.0	0.6	0.1	879.3	0.01	99.92
52.0-53.0	0.6	0.0	879.3	0.01	99.93
53.0-54.0	0.5	0.0	879.4	0.01	99.94
54.0-55.0	0.5	0.0	879.4	0.00	99.94
55.0-56.0	0.4	0.0	879.5	0.00	99.94
56.0-57.0	0.4	0.0	879.5	0.00	99.95
57.0-58.0	0.4	0.0	879.5	0.00	99.95
58.0-59.0	0.5	0.0	879.6	0.01	99.96
59.0-60.0	0.4	0.0	879.6	0.00	99.96
60.0-61.0	0.4	0.0	879.7	0.00	99.97
61.0-62.0	0.4	0.0	879.7	0.00	99.97
62.0-63.0	0.4	0.0	879.8	0.00	99.98
63.0-64.0	0.4	0.0	879.8	0.01	99.98
64.0-65.0	0.4	0.0	879.8	0.00	99.99
65.0-66.0	0.4	0.0	879.9	0.00	99.99
66.0-67.0	0.3	0.0	879.9	0.00	100.00
67.0-68.0	0.2	0.0	879.9	0.00	100.00
68.0-69.0	0.1	0.0	879.9	0.00	100.00
69.0-70.0	0.0	0.0	879.9	0.00	100.00
70.0-71.0	0.0	0.0	879.9	0.00	100.00
71.0-72.0	0.0	0.0	879.9	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	879.9	0.00	100.00
73.0-74.0	0.0	0.0	879.9	0.00	100.00
74.0-75.0	0.0	0.0	879.9	0.00	100.00
75.0-76.0	0.0	0.0	879.9	0.00	100.00
76.0-77.0	0.0	0.0	879.9	0.00	100.00
77.0-78.0	0.0	0.0	879.9	0.00	100.00
78.0-79.0	0.0	0.0	879.9	0.00	100.00
79.0-80.0	0.0	0.0	879.9	0.00	100.00
80.0-81.0	0.0	0.0	879.9	0.00	100.00
81.0-82.0	0.0	0.0	879.9	0.00	100.00
82.0-83.0	0.0	0.0	879.9	0.00	100.00
83.0-84.0	0.0	0.0	879.9	0.00	100.00
84.0-85.0	0.0	0.0	879.9	0.00	100.00
85.0-86.0	0.0	0.0	879.9	0.00	100.00
86.0-87.0	0.0	0.0	879.9	0.00	100.00
87.0-88.0	0.0	0.0	879.9	0.00	100.00
88.0-89.0	0.0	0.0	879.9	0.00	100.00
89.0-90.0	0.0	0.0	879.9	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	3428.0	3428.0								
G1.0	3424.7	3424.2								
G2.0	3408.9	3412.2								
G3.0	3376.1	3389.4								
G4.0	3334.9	3360.0								
G5.0	3274.6	3318.4								
G6.0	3203.5	3262.4								
G7.0	3114.6	3189.7								
G8.0	2995.3	3093.0								
G9.0	2841.3	2988.2								
G10.0	2664.7	2865.0								
G11.0	2475.1	2724.7								
G12.0	2277.6	2574.4								
G13.0	2060.5	2407.9								
G14.0	1828.3	2224.9								
G15.0	1579.9	2021.5								
G16.0	1329.2	1793.0								
G17.0	1086.7	1552.9								
G18.0	862.8	1311.8								
G19.0	665.7	1073.5								
G20.0	501.9	854.5								
G21.0	376.3	663.0								
G22.0	287.4	508.7								
G23.0	213.5	389.6								
G24.0	159.8	296.4								
G25.0	121.8	223.4								
G26.0	92.2	170.0								
G27.0	71.6	130.0								
G28.0	56.0	100.1								
G29.0	44.4	77.5								
G30.0	36.0	60.8								
G31.0	29.1	47.1								
G32.0	23.7	37.5								
G33.0	19.2	29.4								
G34.0	15.6	23.3								
G35.0	12.3	18.2								
G36.0	9.6	14.3								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	7.4	11.0								
G38.0	5.9	8.4								
G39.0	4.8	6.2								
G40.0	3.9	4.7								
G41.0	3.5	3.5								
G42.0	3.2	3.0								
G43.0	2.8	2.5								
G44.0	2.4	2.3								
G45.0	2.0	2.0								
G46.0	1.6	1.4								
G47.0	1.4	1.2								
G48.0	1.2	1.0								
G49.0	1.0	0.8								
G50.0	0.9	0.8								
G51.0	0.8	0.4								
G52.0	0.8	0.4								
G53.0	0.6	0.4								
G54.0	0.8	0.3								
G55.0	0.8	0.2								
G56.0	0.8	0.2								
G57.0	0.8	0.2								
G58.0	0.8	0.2								
G59.0	0.8	0.3								
G60.0	0.6	0.2								
G61.0	0.8	0.2								
G62.0	0.8	0.2								
G63.0	0.8	0.2								
G64.0	0.8	0.2								
G65.0	0.6	0.2								
G66.0	0.4	0.3								
G67.0	0.4	0.2								
G68.0	0.0	0.2								
G69.0	0.0	0.2								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: