中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.: Test Time: 2026-05-05 17:23

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: 50D
Luminous Width (mm): -49
Current: 0.090 A
Power Factor: 0.474
Luminous Length (mm): -49
Voltage: 231.1 V
Power: 9.90 W


Photometric Results

CIE Class: Direct
Measurement Flux: 797.8 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H42.7
Vertical Diffuse Angle(50%): V42.7
Luminaire Efficacy Rating (LER): 80.64
Max. Intensity: 1655.9 cd
S/MH(C0/C180): 0.71
Total Rated Lamp Lumens: 797.8 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 1650.19 cd
Pos of Max. Intensity: H0 V5
S/MH(C90/C270): 0.71

Picture Of Luminaire





Luminous Intensity Distribution Curve

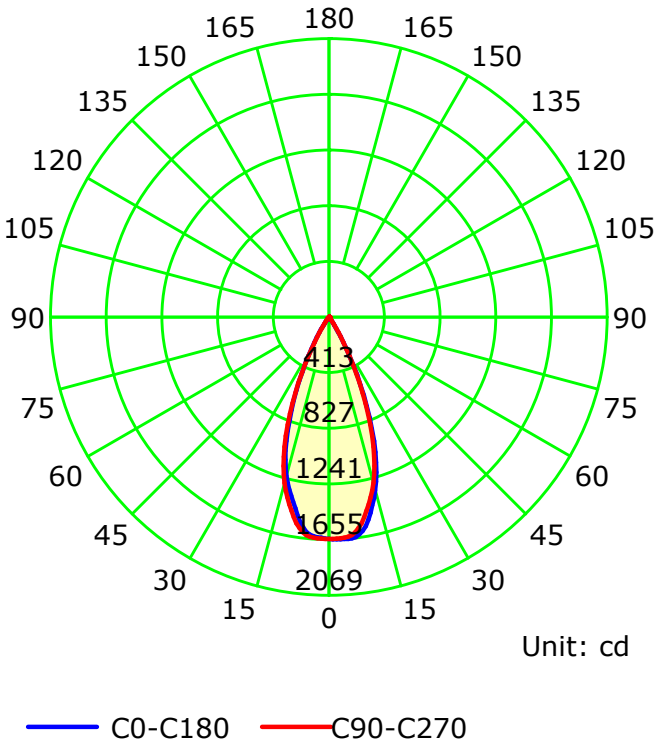

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:
Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

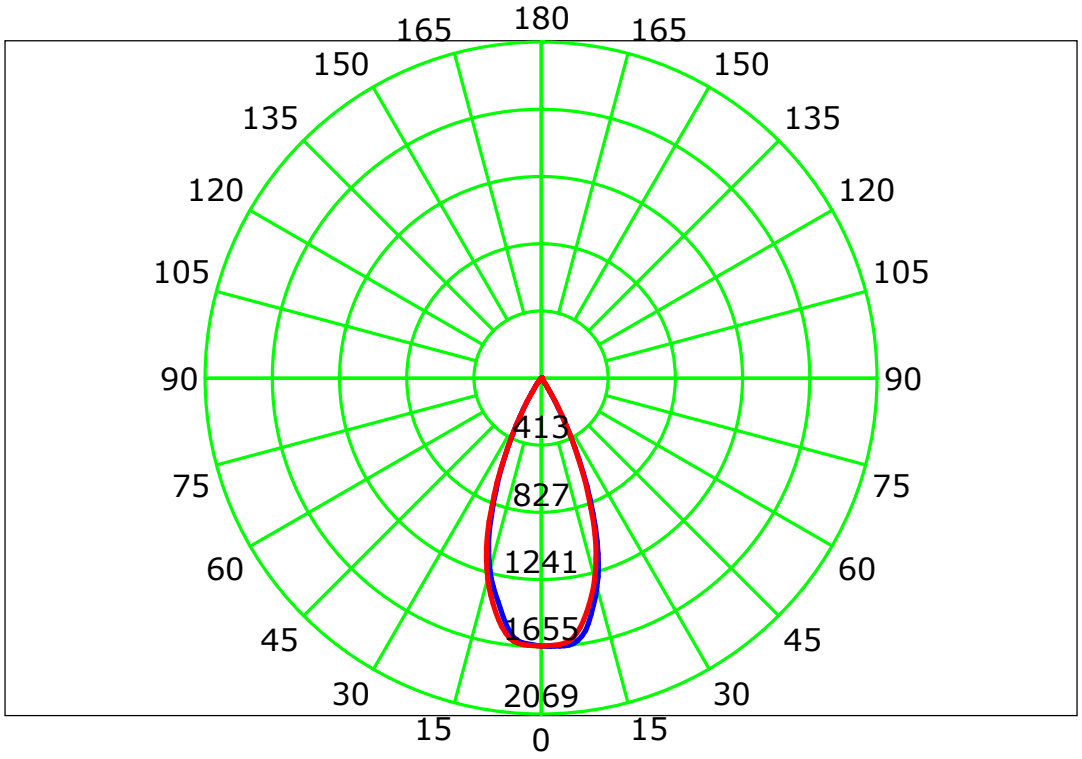


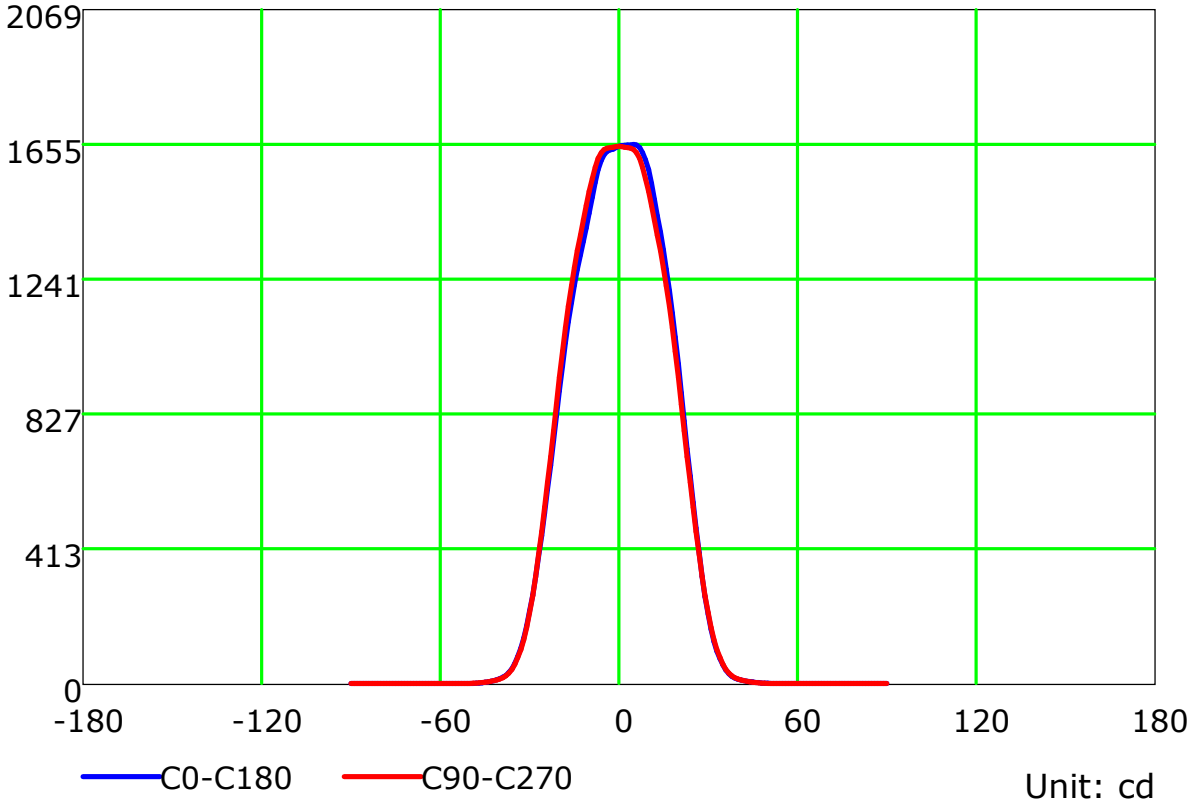

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

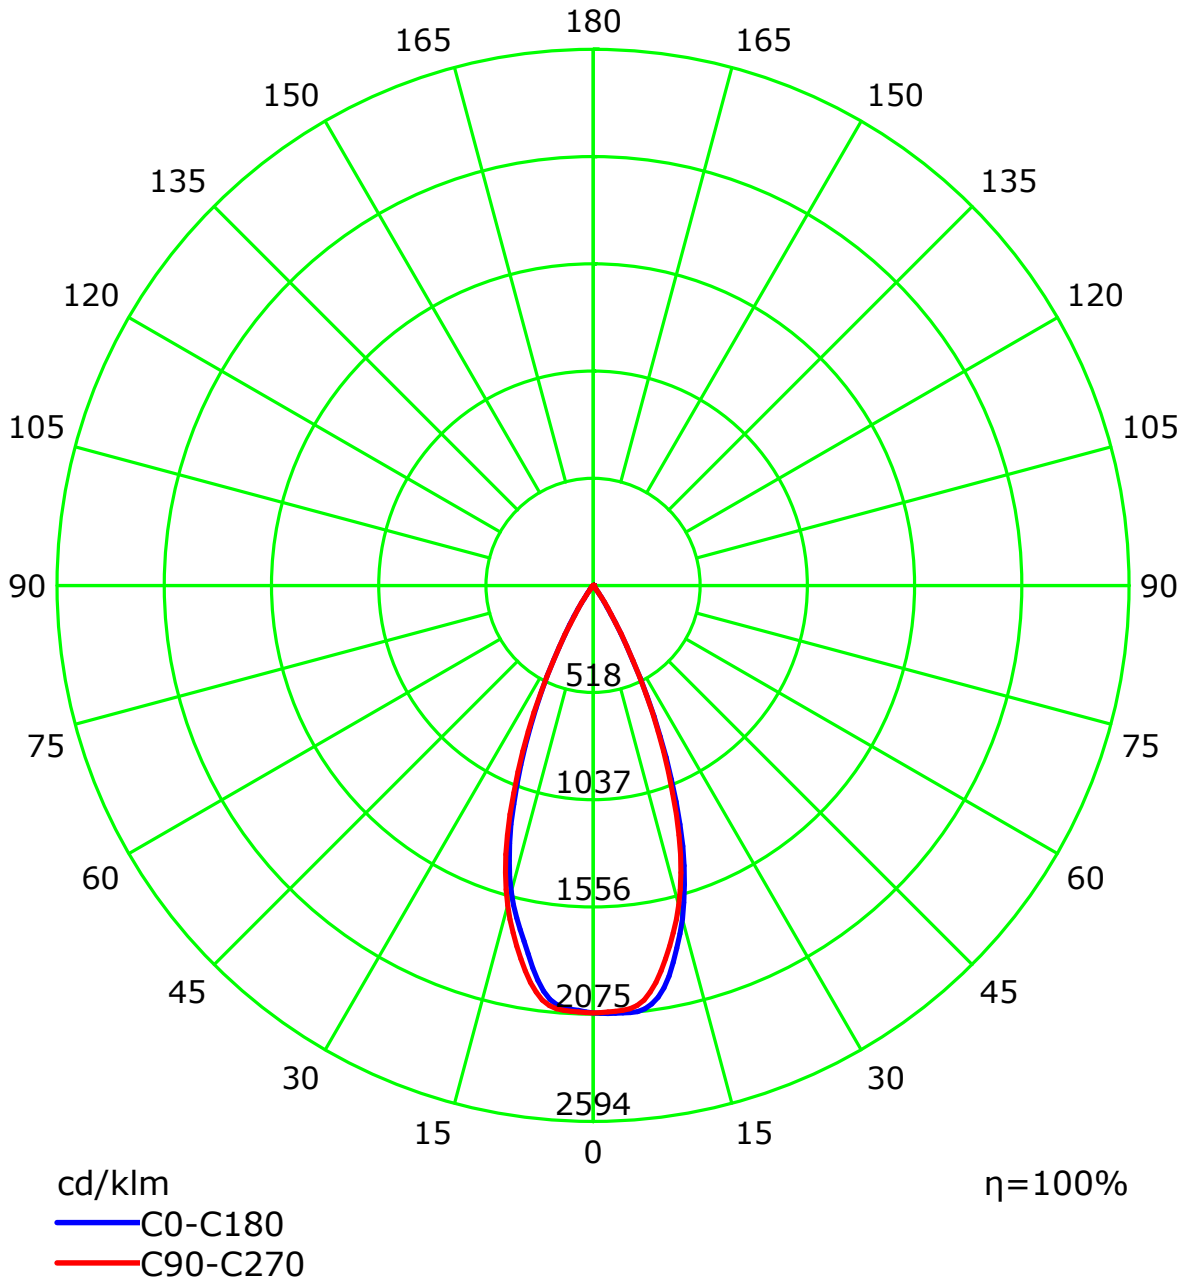

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

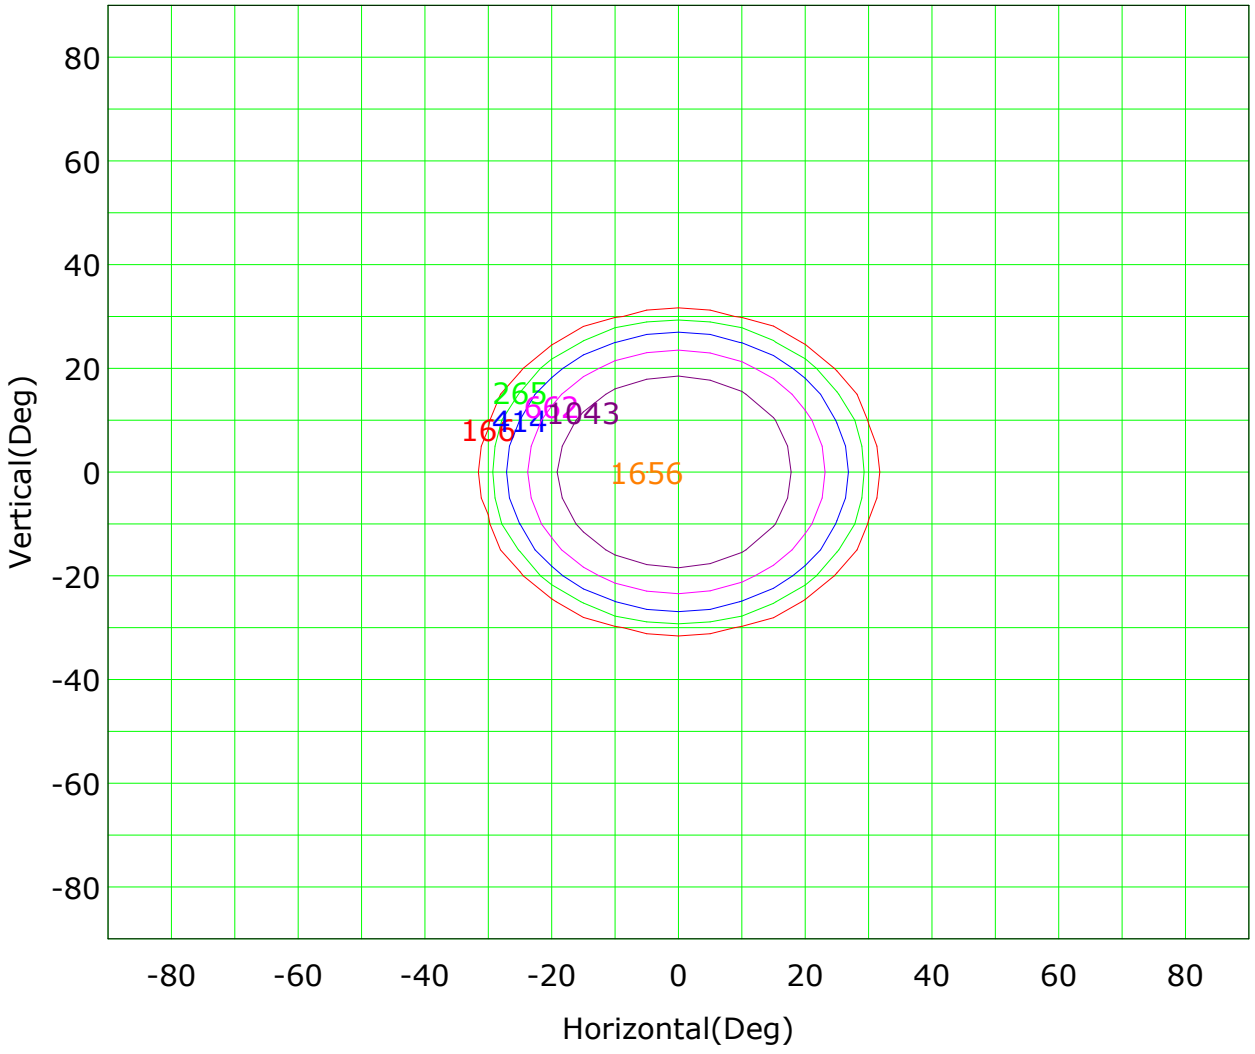


Imax (100%): 1656 cd

(10%): 166 cd
(16%): 265 cd
(25%): 414 cd
(40%): 662 cd
(63%): 1043 cd
(100%): 1656 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

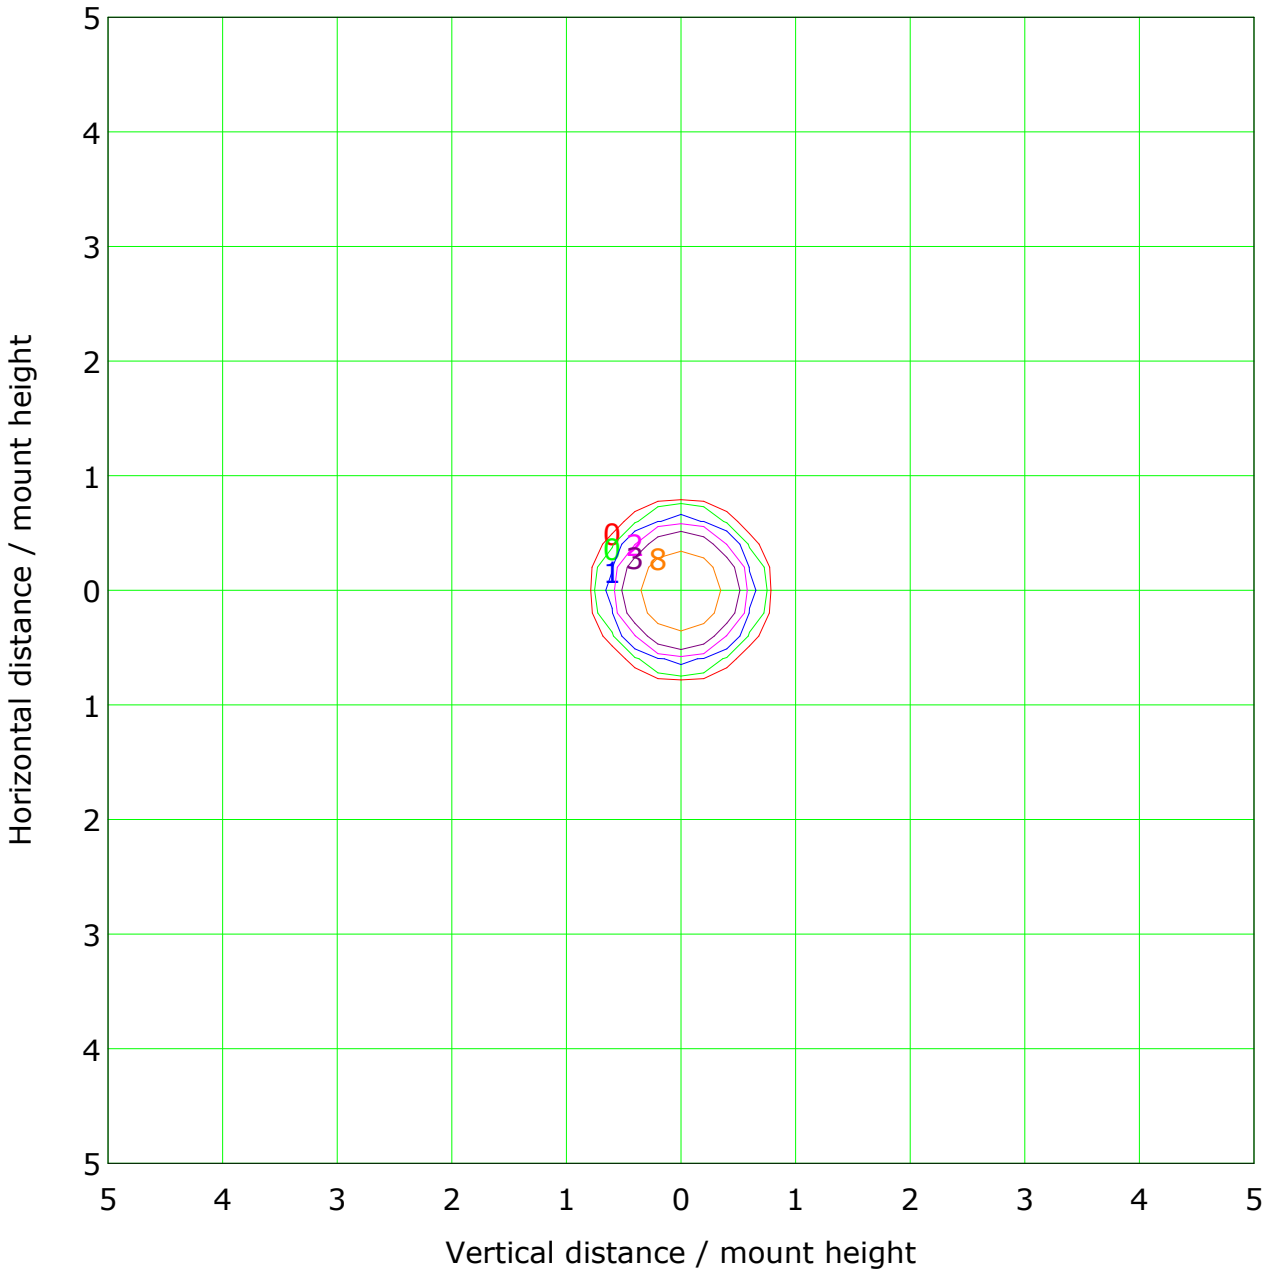


Mounting Height: 10.0m Max Lux(100%): 16.5 lx

(1%): 0.2 lx	(2%): 0.3 lx
(5%): 0.8 lx	(10%): 1.7 lx
(20%): 3.3 lx	(50%): 8.3 lx
(100%): 16.5 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Illuminance at a Distance

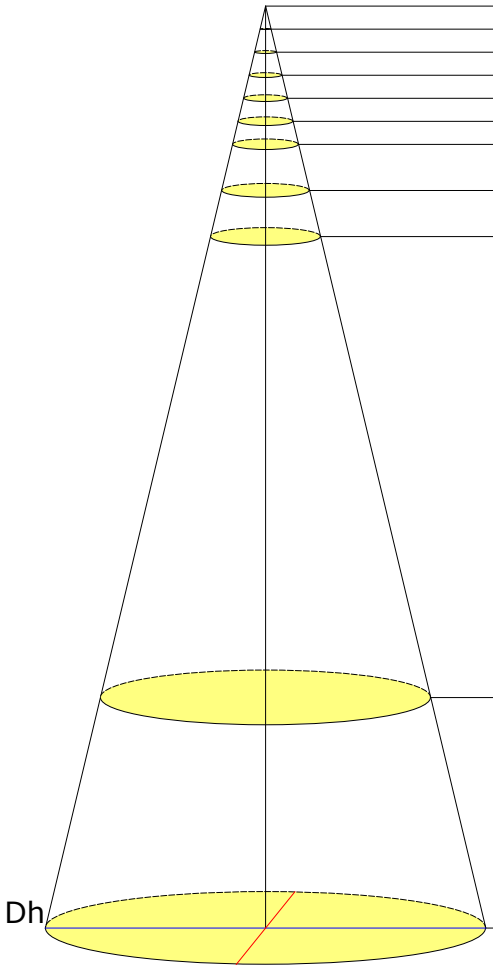


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	6600.76	0.39/0.39	0.1	2935.77
1.0	1650.19	0.78/0.78	0.5	733.94
1.5	733.42	1.17/1.18	1.1	326.20
2.0	412.55	1.56/1.57	1.9	183.49
2.5	264.03	1.95/1.96	3.0	117.43
3.0	183.35	2.34/2.35	4.3	81.55
4.0	103.14	3.13/3.14	7.7	45.87
5.0	66.01	3.91/3.92	12.0	29.36
15.0	7.33	11.72/11.76	108.1	3.26
20.0	4.13	15.63/15.68	192.2	1.83

Beam Angle(B): H42.7 V42.8 Field Angle(F): H62.4 V62.4

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

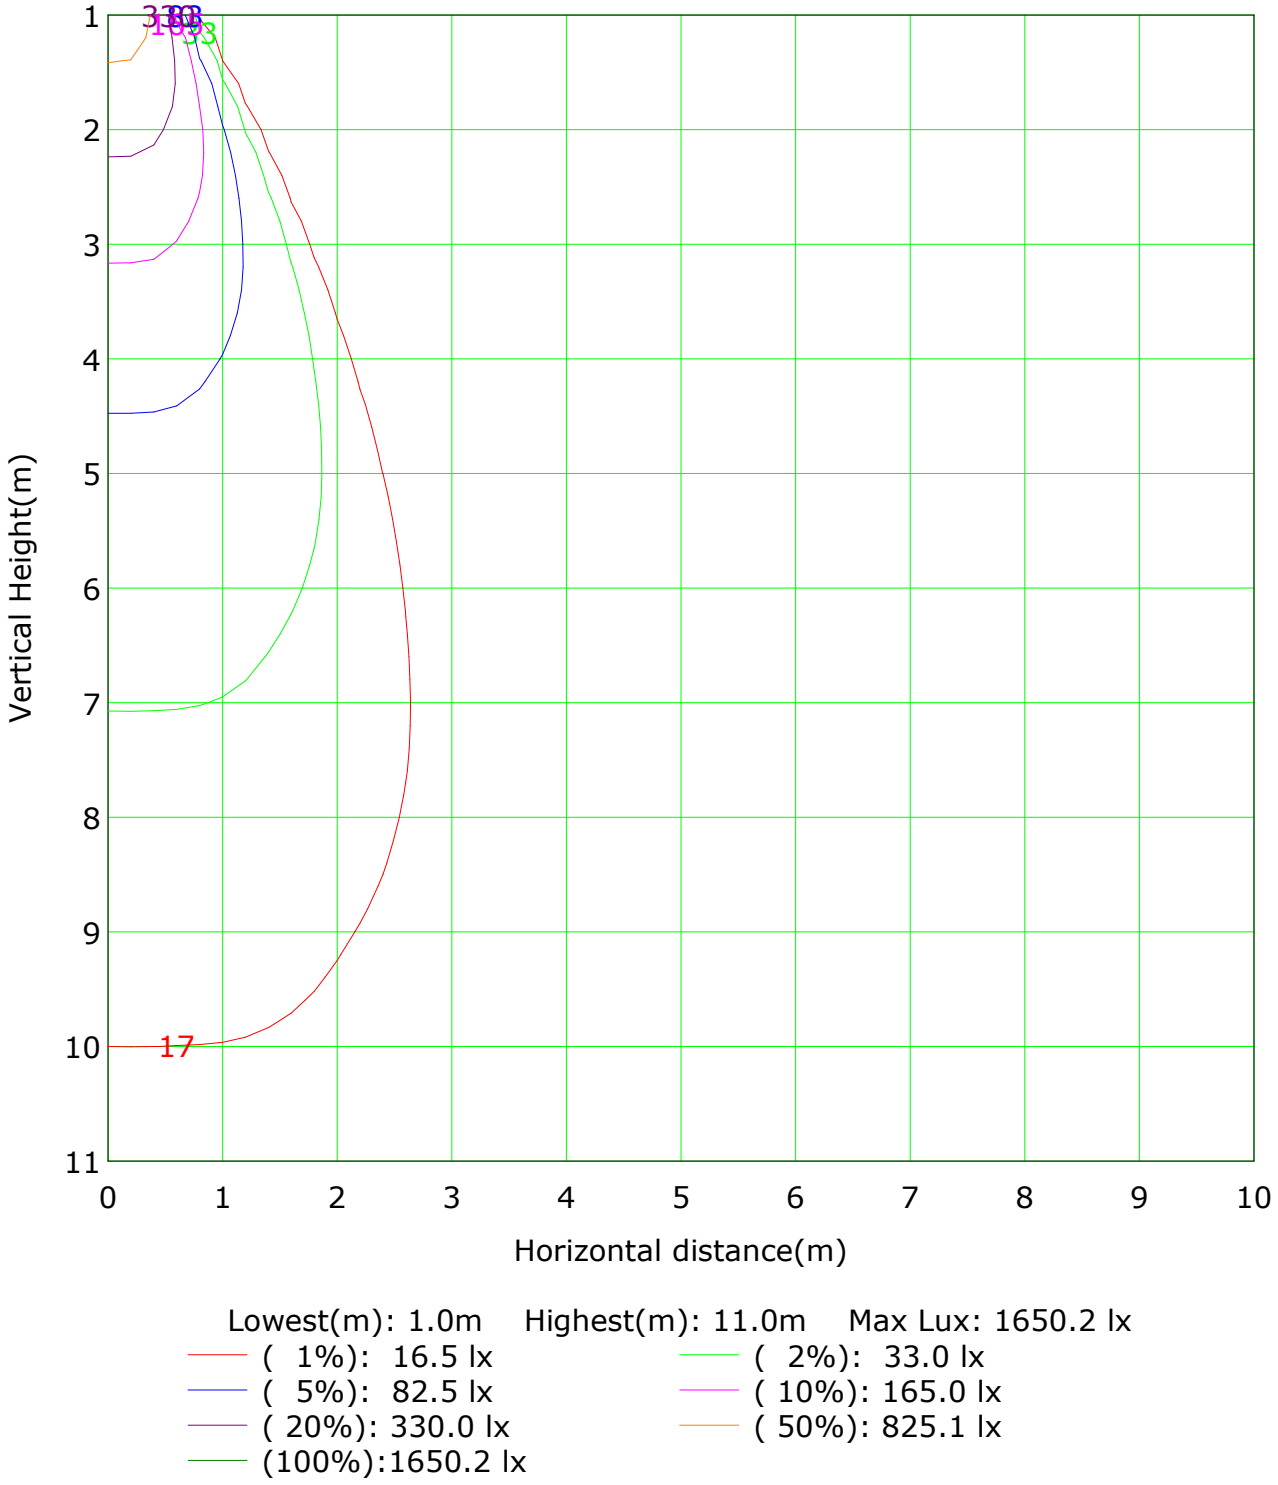

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1650.2 lx

(1%): 16.5 lx
(2%): 33.0 lx
(5%): 82.5 lx
(10%): 165.0 lx
(20%): 330.0 lx
(50%): 825.1 lx
(100%):1650.2 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	1.0	1.9	1.9	1.0	0.3	0.1	0.0	0.0	0.0	0.0	0.0	6.4	0.7
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.3	2.3	8.2	13.8	13.8	8.2	2.3	0.3	0.0	0.0	0.0	0.0	0.0	49.2	43.7
-20	0.0	0.0	0.0	0.0	0.0	0.1	1.1	8.7	24.0	34.0	34.0	24.0	8.7	1.1	0.1	0.0	0.0	0.0	0.0	135.8	131.6
-10	0.0	0.0	0.0	0.0	0.0	0.2	2.1	15.4	36.0	46.9	46.9	36.0	15.4	2.1	0.2	0.0	0.0	0.0	0.0	201.1	197.3
0	0.0	0.0	0.0	0.0	0.0	0.2	2.1	15.5	36.6	48.2	48.2	36.6	15.5	2.1	0.2	0.0	0.0	0.0	0.0	205.1	201.3
10	0.0	0.0	0.0	0.0	0.0	0.1	1.1	8.7	25.0	36.5	36.5	25.0	8.7	1.1	0.1	0.0	0.0	0.0	0.0	142.6	138.6
20	0.0	0.0	0.0	0.0	0.0	0.0	0.3	2.2	8.2	14.5	14.5	8.2	2.2	0.3	0.0	0.0	0.0	0.0	0.0	50.4	44.9
30	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	0.9	1.7	1.7	0.9	0.3	0.1	0.0	0.0	0.0	0.0	0.0	6.0	0.6
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	798	759
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 547.18lm

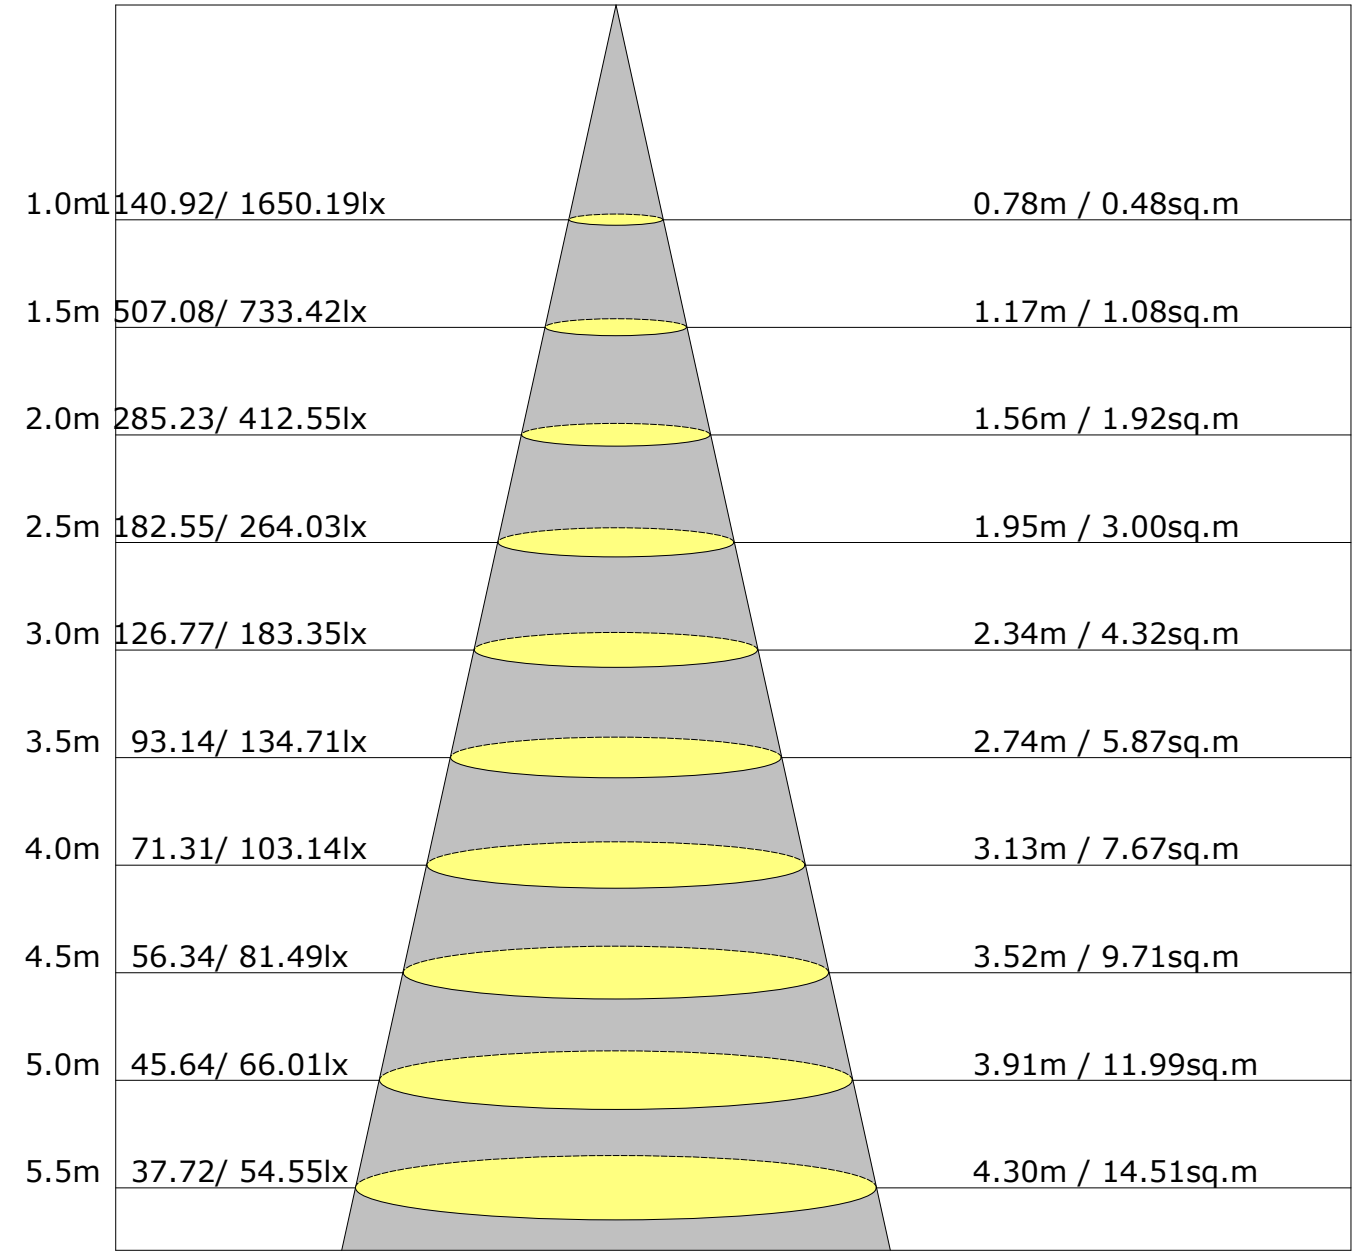

Height | Avg./Nadir. E | Beam Angle:42.7° | Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	11.9	12.6	12.1	12.7	12.9	12.1	12.8	12.3	13.0	13.2
3H	11.7	12.4	12.0	12.6	12.8	11.9	12.6	12.2	12.8	13.0
4H	11.6	12.2	12.0	12.5	12.8	11.9	12.4	12.2	12.7	13.0
6H	11.6	12.1	11.9	12.4	12.7	11.8	12.3	12.1	12.6	12.9
8H	11.5	12.1	11.9	12.4	12.7	11.7	12.3	12.1	12.6	12.9
12H	11.5	12.0	11.8	12.3	12.6	11.7	12.2	12.1	12.5	12.8
X=4H Y=2H	11.6	12.2	12.0	12.5	12.8	11.9	12.4	12.2	12.7	13.0
3H	11.5	12.0	11.8	12.3	12.6	11.7	12.2	12.1	12.5	12.8
4H	11.4	11.9	11.8	12.2	12.5	11.6	12.1	12.0	12.4	12.8
6H	11.3	11.7	11.7	12.1	12.5	11.5	11.9	11.9	12.3	12.7
8H	11.3	11.6	11.7	12.0	12.4	11.5	11.9	11.9	12.2	12.6
12H	11.2	11.6	11.7	12.0	12.4	11.4	11.8	11.9	12.2	12.6
X=8H Y=4H	11.3	11.6	11.7	12.0	12.4	11.5	11.9	11.9	12.2	12.6
6H	11.2	11.5	11.6	11.9	12.4	11.4	11.7	11.8	12.1	12.6
8H	11.1	11.4	11.6	11.8	12.3	11.3	11.6	11.8	12.0	12.5
12H	11.1	11.3	11.6	11.8	12.3	11.3	11.5	11.8	12.0	12.5
X=12H Y=4H	11.2	11.6	11.7	12.0	12.4	11.4	11.8	11.9	12.2	12.6
6H	11.1	11.4	11.6	11.8	12.3	11.3	11.6	11.8	12.0	12.5
8H	11.1	11.3	11.6	11.8	12.3	11.3	11.5	11.8	12.0	12.5
Variations with the observer position at spacings:										
S=1.0H	+6.6/-29.3					+6.7/-30.4				
S=1.5H	+9.4/-28.7					+9.5/-32.6				
S=2.0H	+11.4/-1.$					+11.5/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 798lm (8log(F/F0) = -0.8).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

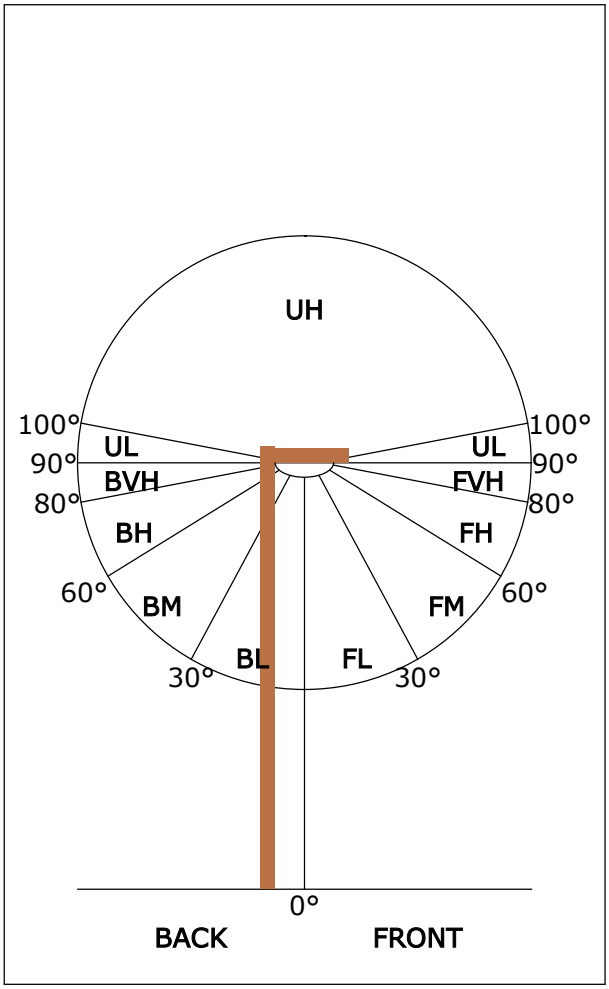

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	405	50.7
FL (0°-30°)	380	47.6
FM (30°-60°)	25	3.2
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	393	49.3
BL (0°-30°)	367	46.0
BM (30°-60°)	26	3.3
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1649.8	1.6	1.6	0.20	0.20
1.0-2.0	1648.5	4.7	6.3	0.59	0.79
2.0-3.0	1647.1	7.9	14.2	0.99	1.78
3.0-4.0	1645.6	11.0	25.2	1.38	3.16
4.0-5.0	1642.5	14.1	39.3	1.77	4.93
5.0-6.0	1635.7	17.2	56.5	2.15	7.09
6.0-7.0	1621.8	20.1	76.7	2.52	9.61
7.0-8.0	1599.1	22.9	99.6	2.87	12.48
8.0-9.0	1568.5	25.4	125.0	3.19	15.66
9.0-10.0	1531.5	27.7	152.7	3.47	19.14
10.0-11.0	1489.8	29.8	182.5	3.73	22.87
11.0-12.0	1445.7	31.6	214.1	3.96	26.83
12.0-13.0	1400.2	33.2	247.3	4.17	31.00
13.0-14.0	1353.3	34.6	282.0	4.34	35.34
14.0-15.0	1303.9	35.8	317.8	4.49	39.83
15.0-16.0	1250.1	36.6	354.4	4.59	44.42
16.0-17.0	1190.6	37.1	391.5	4.65	49.07
17.0-18.0	1126.0	37.1	428.6	4.65	53.72
18.0-19.0	1056.3	36.8	465.4	4.61	58.33
19.0-20.0	980.2	35.9	501.2	4.50	62.83
20.0-21.0	899.1	34.5	535.8	4.33	67.15
21.0-22.0	817.3	32.8	568.6	4.12	71.27
22.0-23.0	736.6	30.9	599.5	3.87	75.15
23.0-24.0	657.1	28.7	628.3	3.60	78.75
24.0-25.0	579.4	26.3	654.6	3.30	82.05
25.0-26.0	503.8	23.8	678.4	2.98	85.03
26.0-27.0	431.1	21.1	699.5	2.64	87.67
27.0-28.0	362.0	18.3	717.8	2.30	89.97
28.0-29.0	299.0	15.6	733.5	1.96	91.93
29.0-30.0	243.6	13.2	746.6	1.65	93.58
30.0-31.0	195.0	10.9	757.5	1.36	94.94
31.0-32.0	153.7	8.8	766.3	1.10	96.05
32.0-33.0	119.9	7.1	773.3	0.89	96.93
33.0-34.0	92.2	5.6	778.9	0.70	97.63
34.0-35.0	69.6	4.3	783.3	0.54	98.17
35.0-36.0	51.7	3.3	786.5	0.41	98.59

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	37.8	2.5	789.0	0.31	98.90
37.0-38.0	27.7	1.9	790.9	0.23	99.13
38.0-39.0	21.1	1.4	792.3	0.18	99.31
39.0-40.0	16.5	1.2	793.5	0.14	99.45
40.0-41.0	13.1	0.9	794.4	0.12	99.57
41.0-42.0	10.4	0.8	795.1	0.10	99.66
42.0-43.0	8.4	0.6	795.8	0.08	99.74
43.0-44.0	6.7	0.5	796.3	0.06	99.80
44.0-45.0	5.3	0.4	796.7	0.05	99.86
45.0-46.0	4.0	0.3	797.0	0.04	99.90
46.0-47.0	2.9	0.2	797.2	0.03	99.92
47.0-48.0	2.0	0.2	797.4	0.02	99.95
48.0-49.0	1.4	0.1	797.5	0.01	99.96
49.0-50.0	0.9	0.1	797.6	0.01	99.97
50.0-51.0	0.6	0.0	797.6	0.01	99.97
51.0-52.0	0.4	0.0	797.7	0.00	99.98
52.0-53.0	0.3	0.0	797.7	0.00	99.98
53.0-54.0	0.2	0.0	797.7	0.00	99.99
54.0-55.0	0.2	0.0	797.7	0.00	99.99
55.0-56.0	0.3	0.0	797.8	0.00	99.99
56.0-57.0	0.1	0.0	797.8	0.00	99.99
57.0-58.0	0.1	0.0	797.8	0.00	99.99
58.0-59.0	0.1	0.0	797.8	0.00	99.99
59.0-60.0	0.1	0.0	797.8	0.00	99.99
60.0-61.0	0.1	0.0	797.8	0.00	100.00
61.0-62.0	0.1	0.0	797.8	0.00	100.00
62.0-63.0	0.1	0.0	797.8	0.00	100.00
63.0-64.0	0.1	0.0	797.8	0.00	100.00
64.0-65.0	0.0	0.0	797.8	0.00	100.00
65.0-66.0	0.0	0.0	797.8	0.00	100.00
66.0-67.0	0.0	0.0	797.8	0.00	100.00
67.0-68.0	0.0	0.0	797.8	0.00	100.00
68.0-69.0	0.0	0.0	797.8	0.00	100.00
69.0-70.0	0.0	0.0	797.8	0.00	100.00
70.0-71.0	0.0	0.0	797.8	0.00	100.00
71.0-72.0	0.0	0.0	797.8	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	797.8	0.00	100.00
73.0-74.0	0.0	0.0	797.8	0.00	100.00
74.0-75.0	0.0	0.0	797.8	0.00	100.00
75.0-76.0	0.0	0.0	797.8	0.00	100.00
76.0-77.0	0.0	0.0	797.8	0.00	100.00
77.0-78.0	0.0	0.0	797.8	0.00	100.00
78.0-79.0	0.0	0.0	797.8	0.00	100.00
79.0-80.0	0.0	0.0	797.8	0.00	100.00
80.0-81.0	0.0	0.0	797.8	0.00	100.00
81.0-82.0	0.0	0.0	797.8	0.00	100.00
82.0-83.0	0.0	0.0	797.8	0.00	100.00
83.0-84.0	0.0	0.0	797.8	0.00	100.00
84.0-85.0	0.0	0.0	797.8	0.00	100.00
85.0-86.0	0.0	0.0	797.8	0.00	100.00
86.0-87.0	0.0	0.0	797.8	0.00	100.00
87.0-88.0	0.0	0.0	797.8	0.00	100.00
88.0-89.0	0.0	0.0	797.8	0.00	100.00
89.0-90.0	0.0	0.0	797.8	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	1650.2	1650.2								
G1.0	1652.1	1646.9								
G2.0	1653.2	1641.8								
G3.0	1654.1	1639.4								
G4.0	1654.4	1634.6								
G5.0	1655.9	1625.0								
G6.0	1654.1	1607.7								
G7.0	1647.0	1578.4								
G8.0	1631.3	1539.5								
G9.0	1609.2	1493.9								
G10.0	1578.4	1444.7								
G11.0	1536.5	1399.8								
G12.0	1487.7	1358.9								
G13.0	1437.1	1316.9								
G14.0	1386.8	1272.1								
G15.0	1332.6	1223.9								
G16.0	1273.0	1170.6								
G17.0	1207.1	1111.5								
G18.0	1138.2	1047.2								
G19.0	1064.2	975.8								
G20.0	981.9	899.0								
G21.0	893.5	822.2								
G22.0	807.0	746.5								
G23.0	721.6	671.4								
G24.0	637.8	597.7								
G25.0	557.2	524.7								
G26.0	478.6	454.8								
G27.0	401.5	389.6								
G28.0	329.0	328.1								
G29.0	266.8	272.4								
G30.0	212.9	222.4								
G31.0	167.0	177.6								
G32.0	129.7	140.5								
G33.0	99.7	109.8								
G34.0	76.1	83.3								
G35.0	57.0	62.0								
G36.0	42.0	45.6								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	30.2	33.5								
G38.0	21.8	25.5								
G39.0	17.0	20.0								
G40.0	13.7	15.5								
G41.0	11.1	12.0								
G42.0	9.0	9.6								
G43.0	7.7	7.4								
G44.0	6.0	5.7								
G45.0	4.9	4.5								
G46.0	3.9	2.8								
G47.0	3.0	2.0								
G48.0	2.0	1.2								
G49.0	1.5	0.8								
G50.0	1.0	0.4								
G51.0	0.6	0.2								
G52.0	0.4	0.3								
G53.0	0.4	0.2								
G54.0	0.2	0.2								
G55.0	0.6	0.0								
G56.0	0.2	0.3								
G57.0	0.2	0.0								
G58.0	0.2	0.0								
G59.0	0.2	0.0								
G60.0	0.2	0.0								
G61.0	0.2	0.0								
G62.0	0.2	0.0								
G63.0	0.2	0.0								
G64.0	0.2	0.0								
G65.0	0.0	0.0								
G66.0	0.2	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: