中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.: Test Time: 2026-09-10 15:49

Luminaire Property


Luminaire Manufacturer:
Luminaire Description: 15D
Luminous Width (mm): -50
Current: 0.092 A
Power Factor: 0.969
Luminous Length (mm): -50
Voltage: 228.4 V
Power: 20.50 W

Photometric Results

CIE Class: Direct
Measurement Flux: 1932.8 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H21
Vertical Diffuse Angle(50%): V21
Luminaire Efficacy Rating (LER): 94.33
Max. Intensity: 10748.06 cd
S/MH(C0/C180): 0.36
Total Rated Lamp Lumens: 1932.8 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 10748.06 cd
Pos of Max. Intensity: H0 V0
S/MH(C90/C270): 0.36


Picture Of Luminaire


Luminous Intensity Distribution Curve

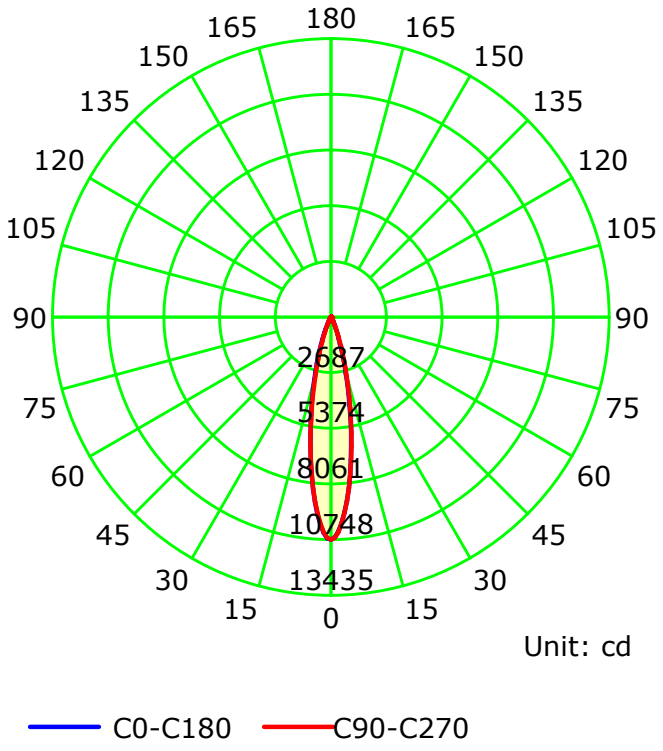

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:
Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

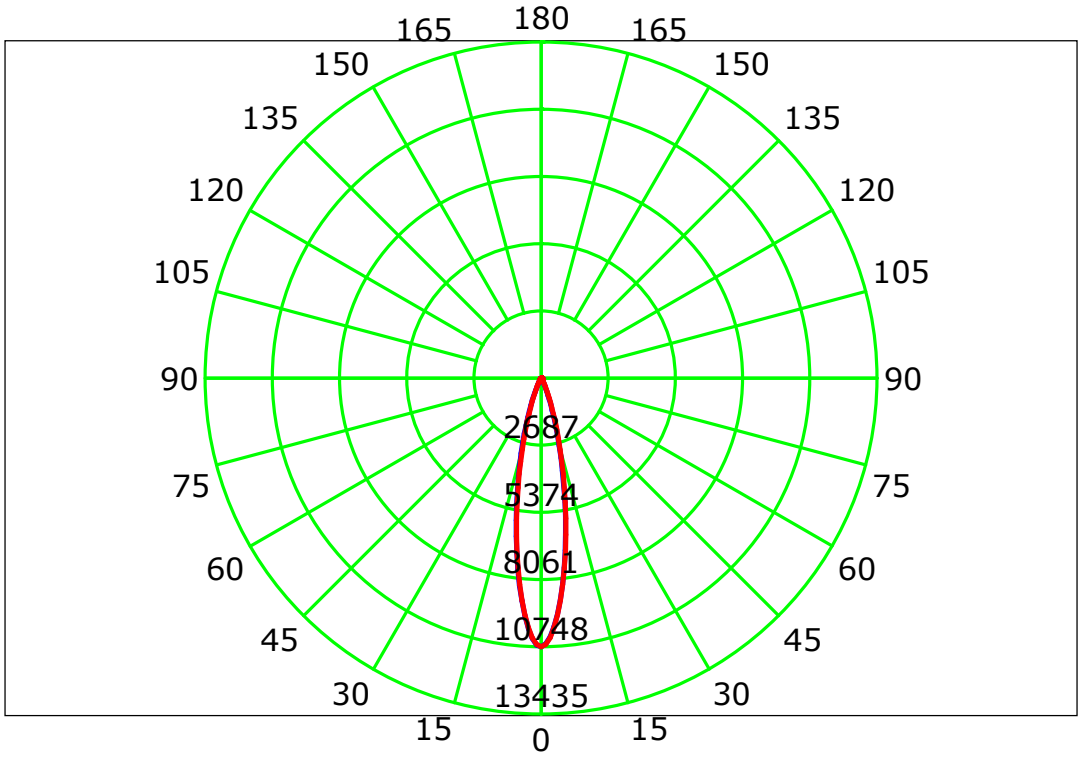


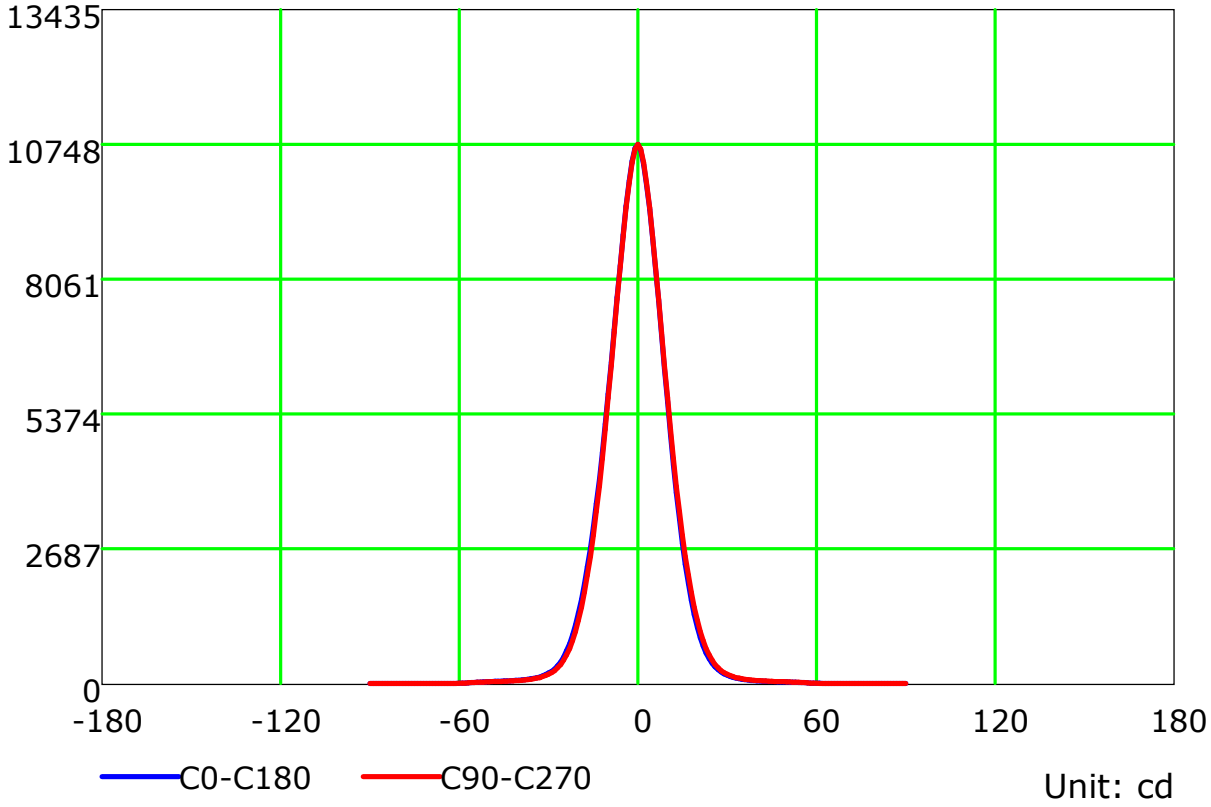

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

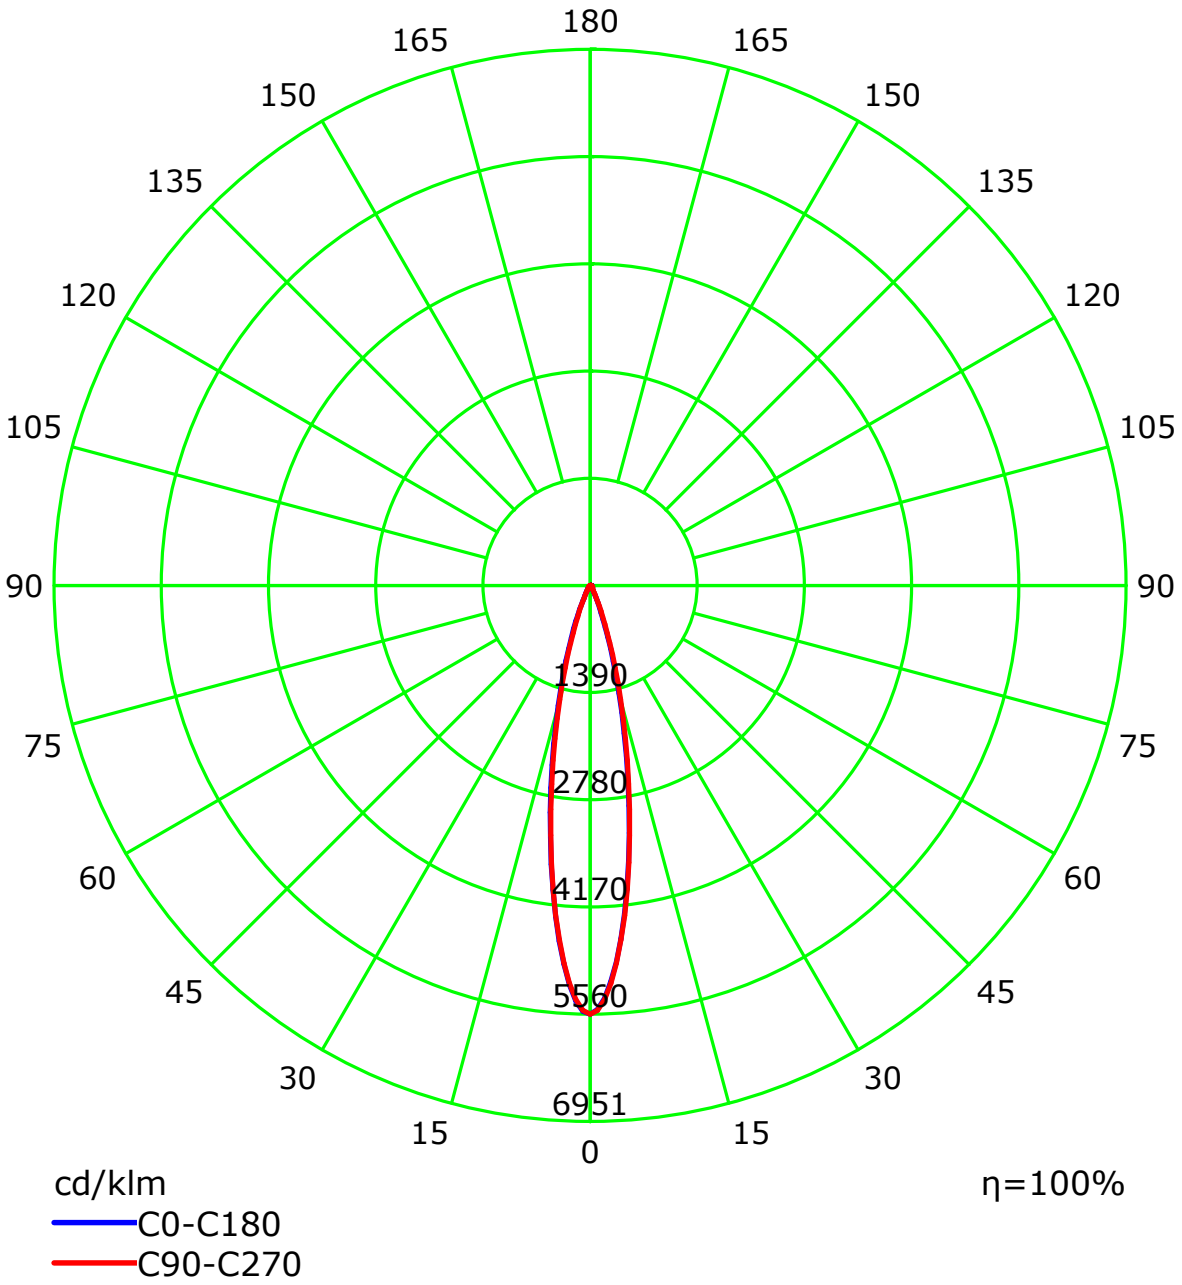

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

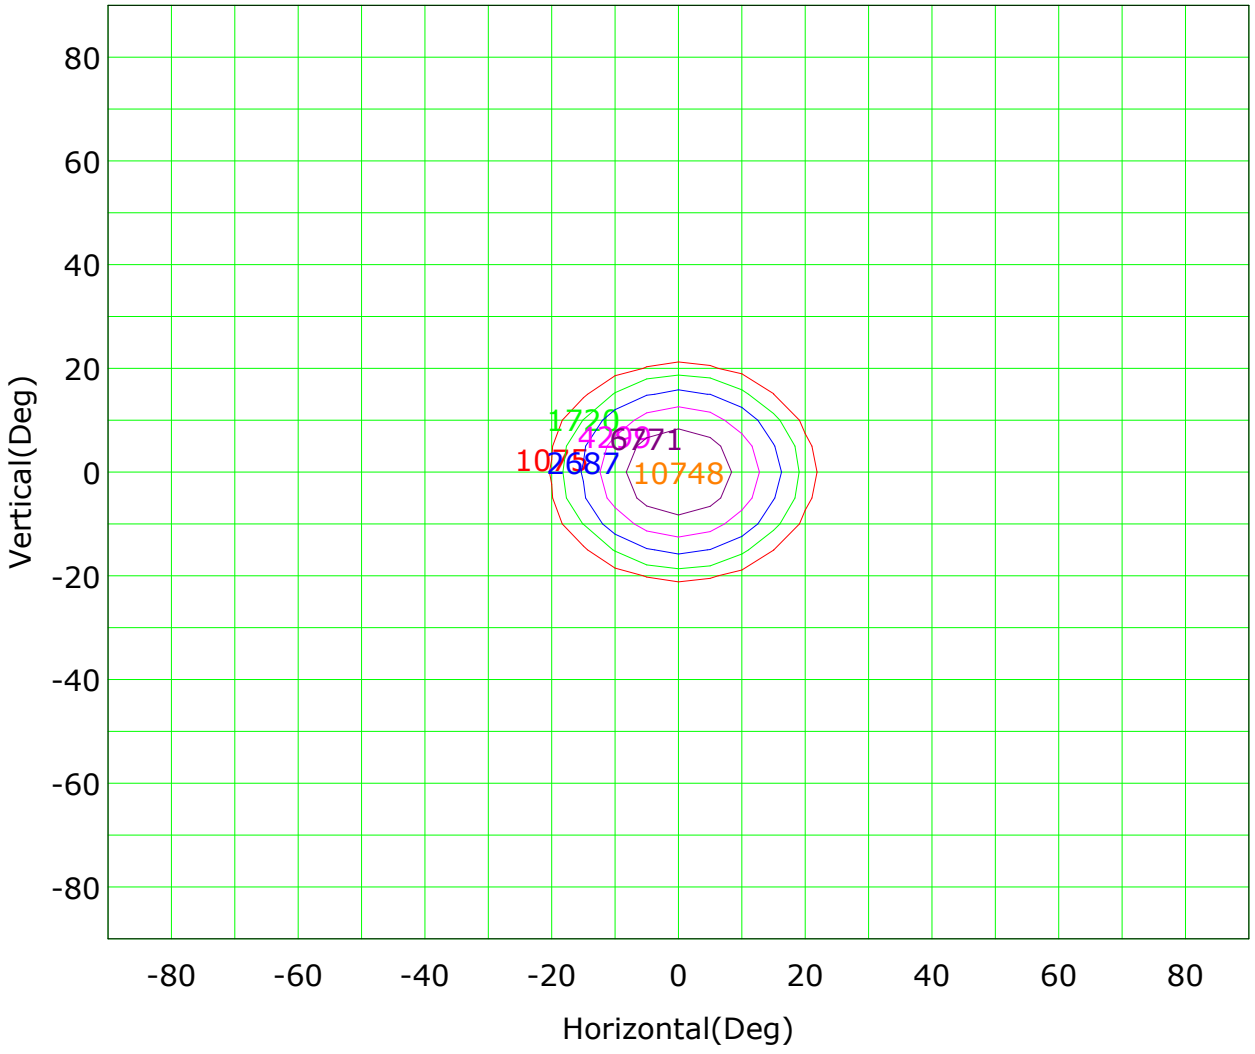


Imax (100%): 10748 cd

(10%): 1075 cd
(16%): 1720 cd
(25%): 2687 cd
(40%): 4299 cd
(63%): 6771 cd
(100%): 10748 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

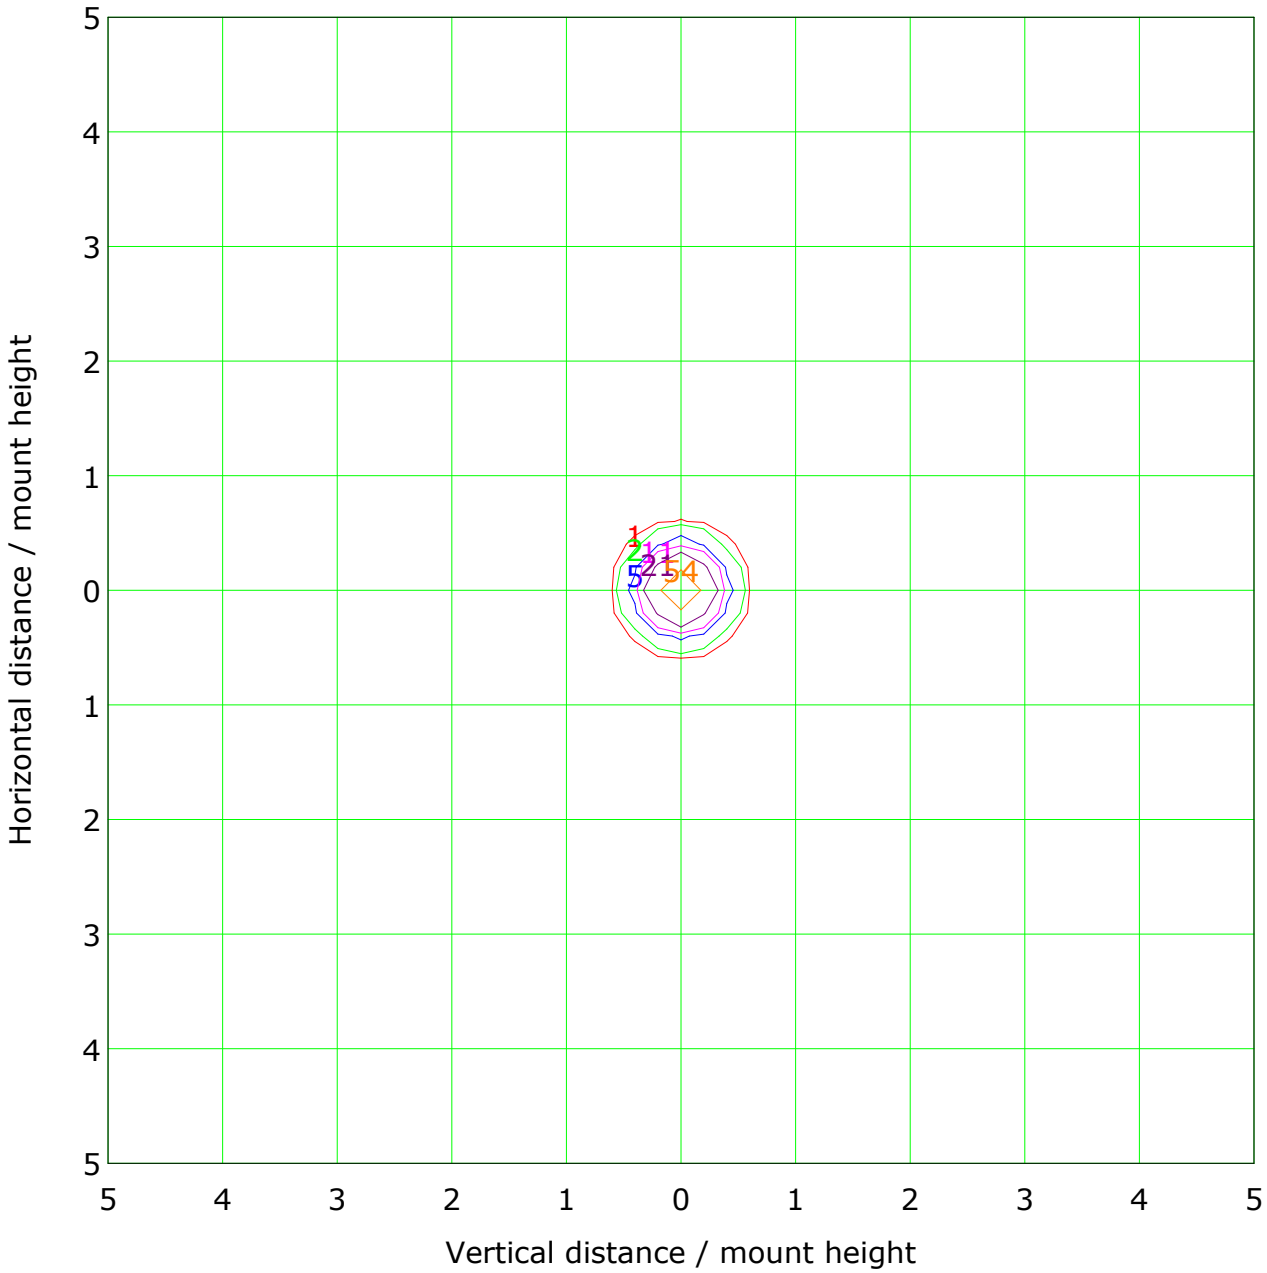


Mounting Height: 10.0m Max Lux(100%): 107.5 lx

(1%): 1.1 lx
(2%): 2.1 lx
(5%): 5.4 lx
(10%): 10.7 lx
(20%): 21.5 lx
(50%): 53.7 lx
(100%): 107.5 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

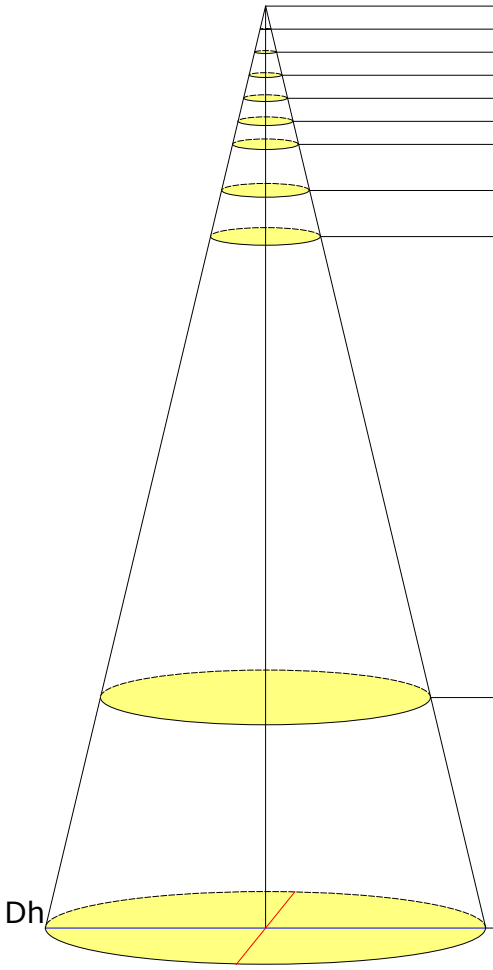


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	42992.24	0.19/0.19	0.0	20901.00
1.0	10748.06	0.37/0.37	0.1	5225.25
1.5	4776.92	0.56/0.56	0.2	2322.33
2.0	2687.01	0.74/0.74	0.4	1306.31
2.5	1719.69	0.93/0.93	0.7	836.04
3.0	1194.23	1.11/1.11	1.0	580.58
4.0	671.75	1.49/1.48	1.7	326.58
5.0	429.92	1.86/1.86	2.7	209.01
15.0	47.77	5.57/5.57	24.4	23.22
20.0	26.87	7.43/7.42	43.3	13.06

Beam Angle(B): H21.0 V21.0 Field Angle(F): H41.7 V41.7

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

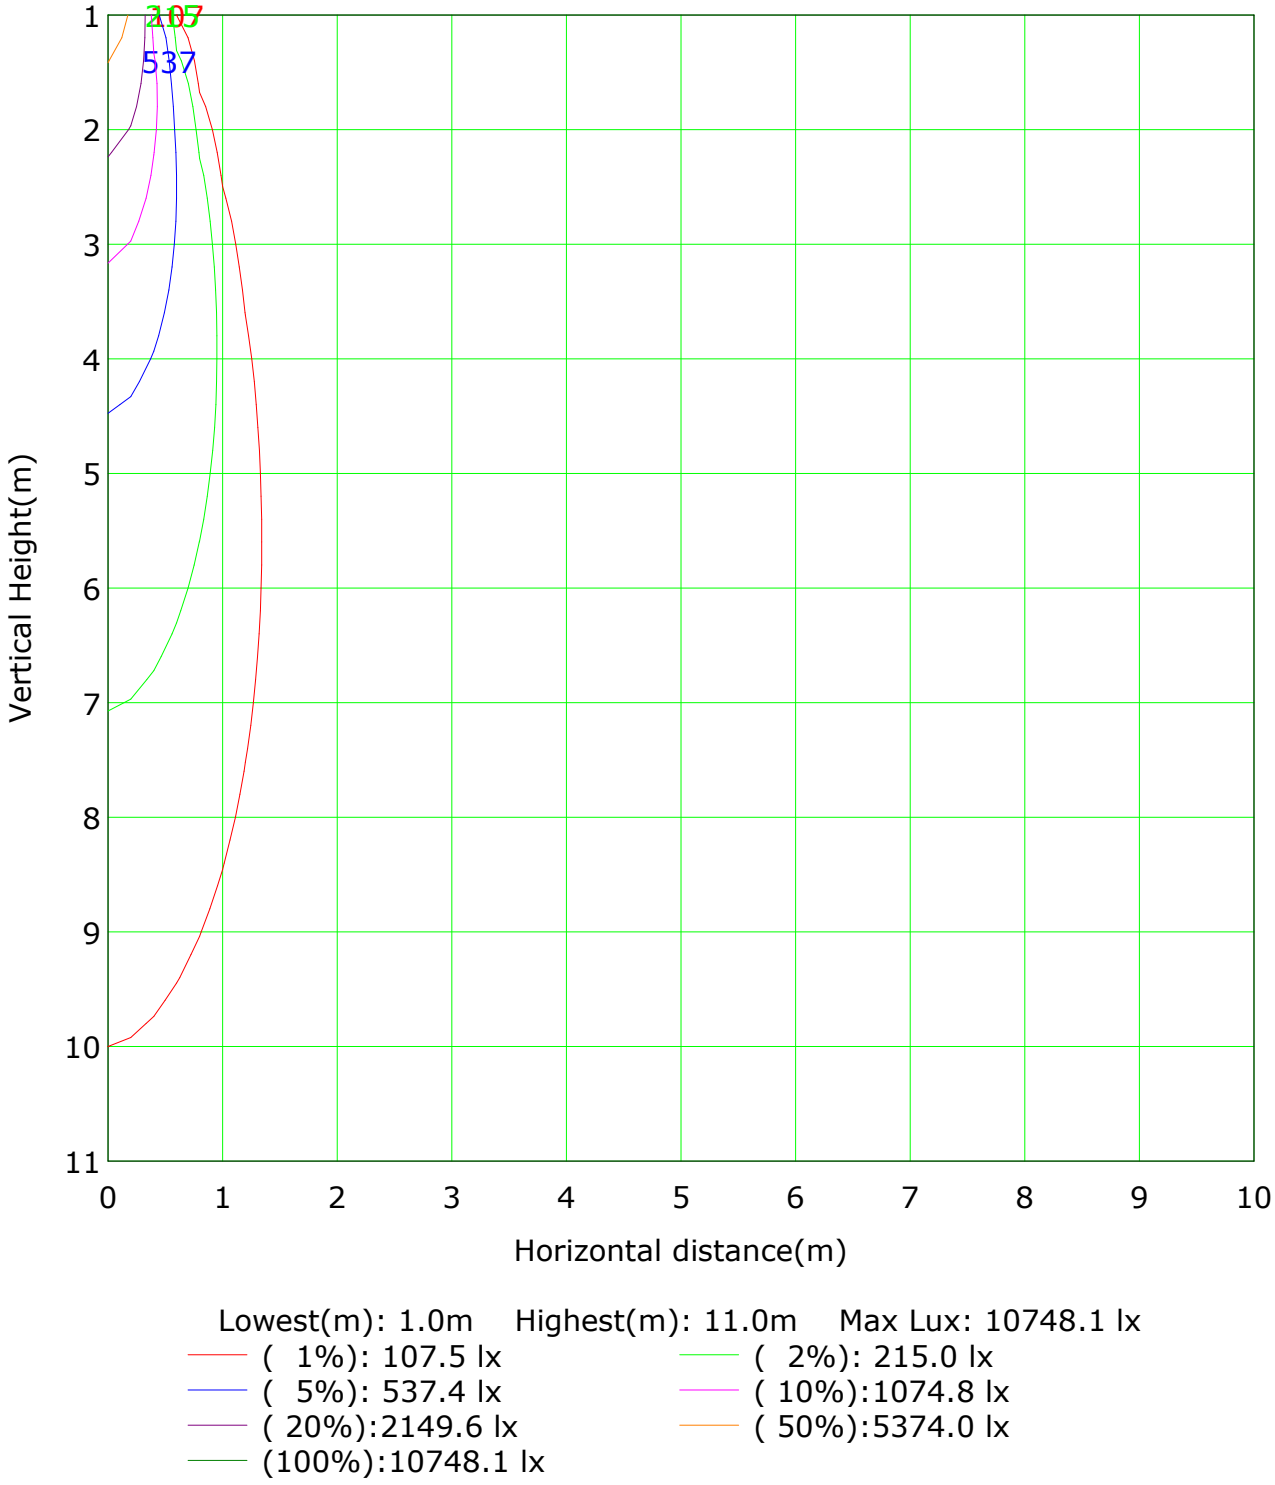

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 10748.1 lx

(1%): 107.5 lx
(2%): 215.0 lx
(5%): 537.4 lx
(10%):1074.8 lx
(20%):2149.6 lx
(50%):5374.0 lx
(100%):10748.1 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																							
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.1	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.3	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.4	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	58.2	4.1
-20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	260.1	213.0
-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	643.1	603.9
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	634.7	595.4
10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	237.8	188.9
20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	48.7	0.0
30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	14.1	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.3	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.2	3.3	8.8	17.1	55.7	250.5	629.8	629.8	250.5	55.7	17.1	8.8	3.3	0.2	0.0	0.0	1931	1605
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 800.99lm

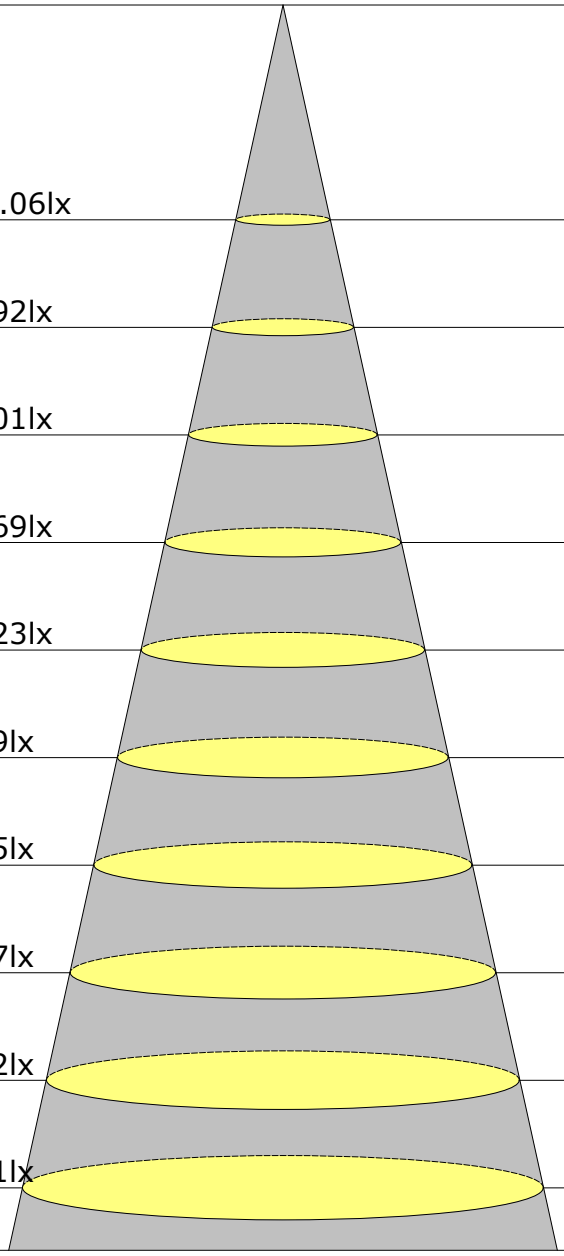

Height	Avg./Nadir. E	Beam Angle:21.0°	Diameter / Area
1.0m	7399.49/ 10748.06lx		0.37m / 0.11sq.m
1.5m	3288.66/ 4776.92lx		0.56m / 0.24sq.m
2.0m	1849.87/ 2687.01lx		0.74m / 0.43sq.m
2.5m	1183.92/ 1719.69lx		0.93m / 0.68sq.m
3.0m	822.17/ 1194.23lx		1.11m / 0.97sq.m
3.5m	604.04/ 877.39lx		1.30m / 1.33sq.m
4.0m	462.47/ 671.75lx		1.49m / 1.73sq.m
4.5m	365.41/ 530.77lx		1.67m / 2.19sq.m
5.0m	295.98/ 429.92lx		1.86m / 2.71sq.m
5.5m	244.61/ 355.31lx		2.04m / 3.27sq.m

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.3	14.9	14.5	15.1	15.2	14.6	15.2	14.8	15.4	15.6
3H	14.1	14.7	14.4	14.9	15.1	14.4	15.0	14.7	15.2	15.5
4H	14.1	14.6	14.4	14.8	15.1	14.4	14.9	14.7	15.1	15.4
6H	14.0	14.5	14.3	14.7	15.0	14.3	14.8	14.6	15.1	15.3
8H	13.9	14.4	14.3	14.7	15.0	14.3	14.7	14.6	15.0	15.3
12H	13.9	14.4	14.3	14.7	15.0	14.2	14.7	14.6	15.0	15.3
X=4H Y=2H	14.2	14.7	14.5	15.0	15.2	14.5	15.0	14.8	15.3	15.5
3H	14.0	14.5	14.4	14.8	15.1	14.3	14.8	14.7	15.1	15.4
4H	13.9	14.3	14.3	14.7	15.0	14.2	14.6	14.6	15.0	15.3
6H	13.9	14.2	14.3	14.6	15.0	14.2	14.5	14.6	14.9	15.3
8H	13.8	14.1	14.2	14.5	14.9	14.1	14.4	14.5	14.8	15.2
12H	13.8	14.1	14.2	14.5	14.9	14.1	14.4	14.5	14.8	15.2
X=8H Y=4H	13.8	14.1	14.2	14.5	14.9	14.1	14.4	14.5	14.8	15.2
6H	13.7	14.0	14.2	14.4	14.8	14.0	14.3	14.5	14.7	15.1
8H	13.7	13.9	14.1	14.3	14.8	14.0	14.2	14.4	14.6	15.1
12H	13.6	13.8	14.1	14.3	14.8	13.9	14.1	14.4	14.6	15.1
X=12H Y=4H	13.8	14.1	14.2	14.5	14.9	14.1	14.4	14.5	14.8	15.2
6H	13.7	13.9	14.1	14.3	14.8	14.0	14.2	14.4	14.6	15.1
8H	13.6	13.8	14.1	14.3	14.8	13.9	14.1	14.4	14.6	15.1
Variations with the observer position at spacings:										
S=1.0H	+1.9/-2.3					+2.0/-2.3				
S=1.5H	+4.0/-15.3					+4.3/-14.1				
S=2.0H	+5.9/-1.$					+6.2/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 1933lm (8log(F/F0) = 2.3).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

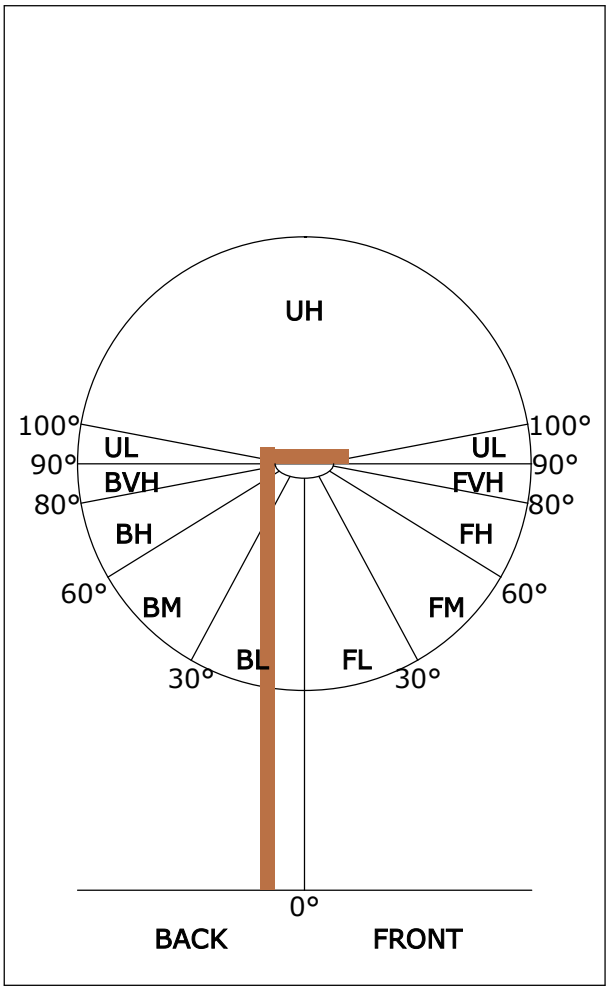

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	945	48.9
FL (0°-30°)	886	45.8
FM (30°-60°)	58	3.0
FH (60°-80°)	1	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	988	51.1
BL (0°-30°)	924	47.8
BM (30°-60°)	63	3.3
BH (60°-80°)	1	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	10700.2	10.2	10.2	0.53	0.53
1.0-2.0	10518.5	30.2	40.4	1.56	2.09
2.0-3.0	10184.2	48.7	89.1	2.52	4.61
3.0-4.0	9735.3	65.2	154.3	3.37	7.98
4.0-5.0	9201.2	79.2	233.5	4.10	12.08
5.0-6.0	8612.9	90.5	324.0	4.68	16.76
6.0-7.0	7986.8	99.1	423.2	5.13	21.89
7.0-8.0	7335.1	105.0	528.2	5.43	27.33
8.0-9.0	6674.4	108.2	636.3	5.60	32.92
9.0-10.0	6017.8	108.9	745.3	5.64	38.56
10.0-11.0	5380.8	107.5	852.8	5.56	44.12
11.0-12.0	4775.5	104.4	957.2	5.40	49.52
12.0-13.0	4210.1	99.9	1057.1	5.17	54.69
13.0-14.0	3684.7	94.3	1151.4	4.88	59.58
14.0-15.0	3196.2	87.8	1239.2	4.54	64.12
15.0-16.0	2750.0	80.6	1319.8	4.17	68.29
16.0-17.0	2349.3	73.2	1393.0	3.79	72.07
17.0-18.0	1990.9	65.6	1458.6	3.40	75.47
18.0-19.0	1673.5	58.2	1516.8	3.01	78.48
19.0-20.0	1393.8	51.0	1567.9	2.64	81.12
20.0-21.0	1151.8	44.2	1612.1	2.29	83.41
21.0-22.0	948.3	38.1	1650.2	1.97	85.38
22.0-23.0	779.1	32.7	1682.9	1.69	87.07
23.0-24.0	638.1	27.9	1710.8	1.44	88.52
24.0-25.0	521.3	23.7	1734.5	1.23	89.74
25.0-26.0	425.5	20.1	1754.6	1.04	90.78
26.0-27.0	348.6	17.1	1771.7	0.88	91.67
27.0-28.0	287.6	14.6	1786.2	0.75	92.42
28.0-29.0	240.1	12.6	1798.8	0.65	93.07
29.0-30.0	204.3	11.0	1809.8	0.57	93.64
30.0-31.0	176.0	9.8	1819.6	0.51	94.15
31.0-32.0	151.9	8.7	1828.3	0.45	94.60
32.0-33.0	130.8	7.7	1836.0	0.40	95.00
33.0-34.0	114.6	6.9	1843.0	0.36	95.35
34.0-35.0	102.5	6.4	1849.3	0.33	95.68
35.0-36.0	92.0	5.9	1855.2	0.30	95.99

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	83.3	5.4	1860.6	0.28	96.27
37.0-38.0	75.4	5.0	1865.7	0.26	96.53
38.0-39.0	69.4	4.7	1870.4	0.24	96.77
39.0-40.0	65.2	4.5	1874.9	0.24	97.01
40.0-41.0	61.4	4.4	1879.3	0.23	97.23
41.0-42.0	56.9	4.1	1883.5	0.21	97.45
42.0-43.0	53.1	3.9	1887.4	0.20	97.65
43.0-44.0	50.5	3.8	1891.2	0.20	97.85
44.0-45.0	47.9	3.7	1894.9	0.19	98.04
45.0-46.0	45.6	3.6	1898.4	0.18	98.22
46.0-47.0	43.3	3.4	1901.9	0.18	98.40
47.0-48.0	41.5	3.4	1905.2	0.17	98.58
48.0-49.0	39.6	3.3	1908.5	0.17	98.74
49.0-50.0	37.7	3.1	1911.6	0.16	98.91
50.0-51.0	35.4	3.0	1914.6	0.16	99.06
51.0-52.0	32.4	2.8	1917.4	0.14	99.21
52.0-53.0	29.4	2.6	1920.0	0.13	99.34
53.0-54.0	26.8	2.4	1922.3	0.12	99.46
54.0-55.0	24.1	2.2	1924.5	0.11	99.57
55.0-56.0	21.1	1.9	1926.4	0.10	99.67
56.0-57.0	17.0	1.6	1927.9	0.08	99.75
57.0-58.0	13.2	1.2	1929.2	0.06	99.81
58.0-59.0	10.6	1.0	1930.2	0.05	99.87
59.0-60.0	8.3	0.8	1930.9	0.04	99.91
60.0-61.0	6.8	0.6	1931.6	0.03	99.94
61.0-62.0	5.3	0.5	1932.1	0.03	99.97
62.0-63.0	3.4	0.3	1932.4	0.02	99.98
63.0-64.0	2.3	0.2	1932.6	0.01	99.99
64.0-65.0	1.1	0.1	1932.8	0.01	100.00
65.0-66.0	0.0	0.0	1932.8	0.00	100.00
66.0-67.0	0.0	0.0	1932.8	0.00	100.00
67.0-68.0	0.0	0.0	1932.8	0.00	100.00
68.0-69.0	0.0	0.0	1932.8	0.00	100.00
69.0-70.0	0.0	0.0	1932.8	0.00	100.00
70.0-71.0	0.0	0.0	1932.8	0.00	100.00
71.0-72.0	0.0	0.0	1932.8	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	1932.8	0.00	100.00
73.0-74.0	0.0	0.0	1932.8	0.00	100.00
74.0-75.0	0.0	0.0	1932.8	0.00	100.00
75.0-76.0	0.0	0.0	1932.8	0.00	100.00
76.0-77.0	0.0	0.0	1932.8	0.00	100.00
77.0-78.0	0.0	0.0	1932.8	0.00	100.00
78.0-79.0	0.0	0.0	1932.8	0.00	100.00
79.0-80.0	0.0	0.0	1932.8	0.00	100.00
80.0-81.0	0.0	0.0	1932.8	0.00	100.00
81.0-82.0	0.0	0.0	1932.8	0.00	100.00
82.0-83.0	0.0	0.0	1932.8	0.00	100.00
83.0-84.0	0.0	0.0	1932.8	0.00	100.00
84.0-85.0	0.0	0.0	1932.8	0.00	100.00
85.0-86.0	0.0	0.0	1932.8	0.00	100.00
86.0-87.0	0.0	0.0	1932.8	0.00	100.00
87.0-88.0	0.0	0.0	1932.8	0.00	100.00
88.0-89.0	0.0	0.0	1932.8	0.00	100.00
89.0-90.0	0.0	0.0	1932.8	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	10748.1	10748.1								
G1.0	10629.0	10675.7								
G2.0	10348.5	10420.9								
G3.0	9944.5	10022.9								
G4.0	9454.5	9519.3								
G5.0	8884.6	8946.4								
G6.0	8278.5	8341.8								
G7.0	7627.2	7699.6								
G8.0	6954.8	7058.8								
G9.0	6277.9	6406.0								
G10.0	5611.5	5775.8								
G11.0	4964.7	5171.3								
G12.0	4364.7	4601.4								
G13.0	3805.3	4069.2								
G14.0	3283.7	3580.7								
G15.0	2799.7	3120.8								
G16.0	2374.6	2704.7								
G17.0	1993.1	2324.8								
G18.0	1662.9	1982.6								
G19.0	1373.5	1675.0								
G20.0	1123.2	1403.6								
G21.0	916.7	1163.9								
G22.0	747.8	964.9								
G23.0	609.1	794.5								
G24.0	497.5	651.3								
G25.0	407.1	529.2								
G26.0	333.2	432.7								
G27.0	275.9	352.8								
G28.0	230.7	291.0								
G29.0	194.5	244.2								
G30.0	167.4	211.1								
G31.0	144.7	180.9								
G32.0	125.1	156.8								
G33.0	108.6	132.7								
G34.0	96.5	120.6								
G35.0	85.9	107.0								
G36.0	78.4	96.5								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	72.4	85.9								
G38.0	63.3	79.9								
G39.0	60.3	73.9								
G40.0	57.3	69.3								
G41.0	54.3	64.8								
G42.0	48.2	60.3								
G43.0	46.7	57.3								
G44.0	43.7	54.3								
G45.0	42.2	51.3								
G46.0	39.2	49.8								
G47.0	36.2	48.2								
G48.0	36.2	45.2								
G49.0	34.7	42.2								
G50.0	34.7	39.2								
G51.0	31.7	36.2								
G52.0	28.6	33.2								
G53.0	25.6	30.1								
G54.0	24.1	27.1								
G55.0	22.6	22.6								
G56.0	19.6	19.6								
G57.0	13.6	15.1								
G58.0	12.1	12.1								
G59.0	10.6	7.5								
G60.0	7.5	7.5								
G61.0	7.5	4.5								
G62.0	4.5	4.5								
G63.0	1.5	3.0								
G64.0	1.5	3.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: