中山雅大光电有限公司
www.artdon.cn
0760-22211886
0760-22211890

Report No.: Test Time: 2026-09-10 16:28

Luminaire Property

Luminaire Manufacturer:
Luminaire Description: 24D
Luminous Width (mm): -60
Current: 0.110 A
Power Factor: 0.980
Luminous Length (mm): -60
Voltage: 228.2 V
Power: 24.60 W


Photometric Results

CIE Class: Direct
Measurement Flux: 2587.6 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H25
Vertical Diffuse Angle(50%): V25
Luminaire Efficacy Rating (LER): 105.24
Max. Intensity: 11948.17 cd
S/MH(C0/C180): 0.42
Total Rated Lamp Lumens: 2587.6 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 11948.16 cd
Pos of Max. Intensity: H0 V0
S/MH(C90/C270): 0.42

Picture Of Luminaire





Luminous Intensity Distribution Curve

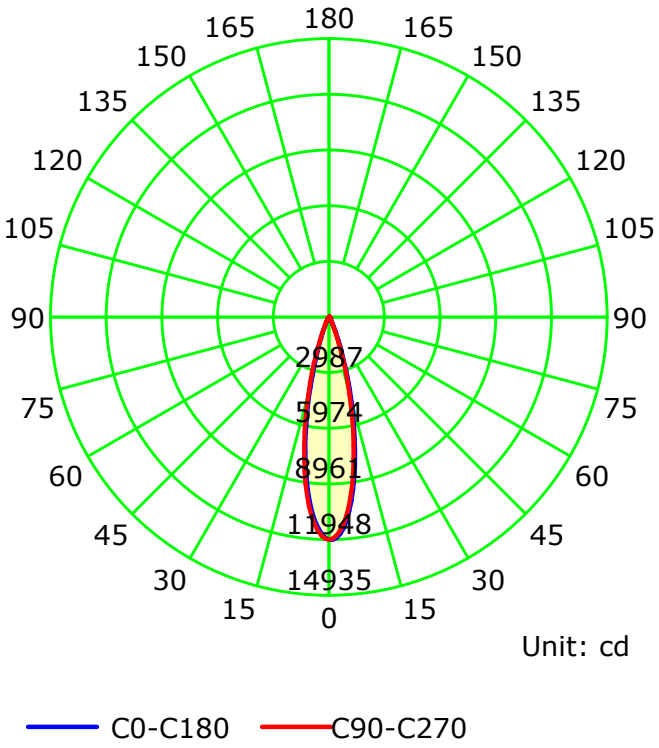

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:
Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve

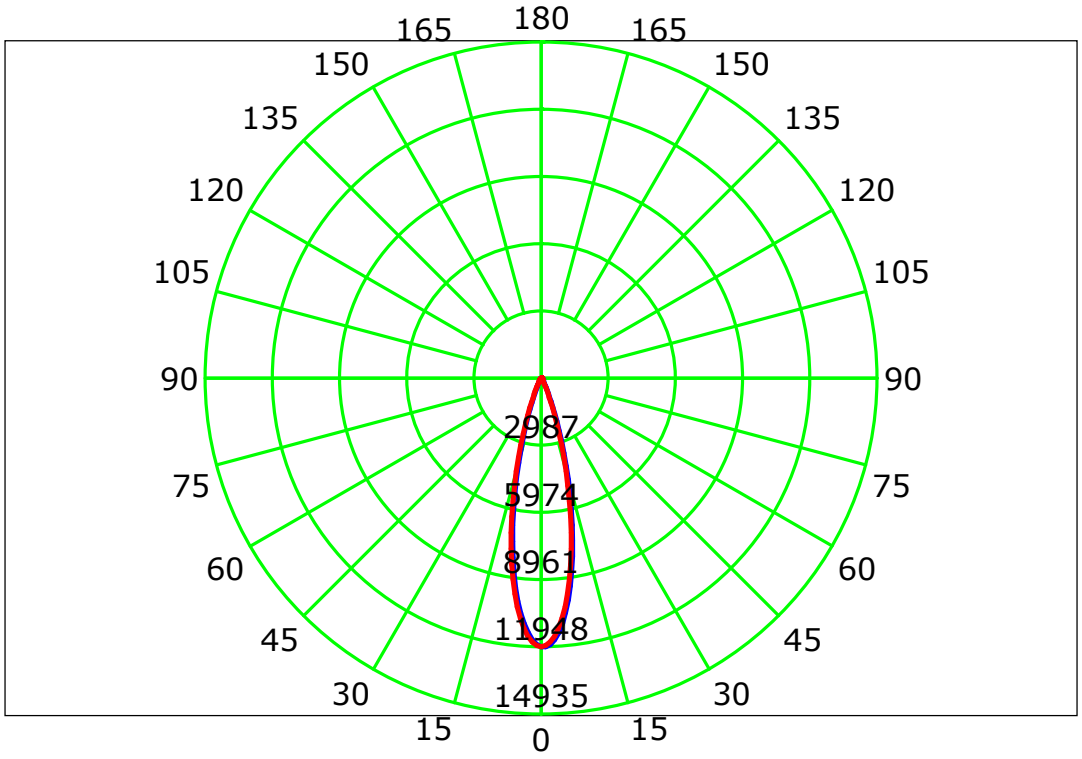


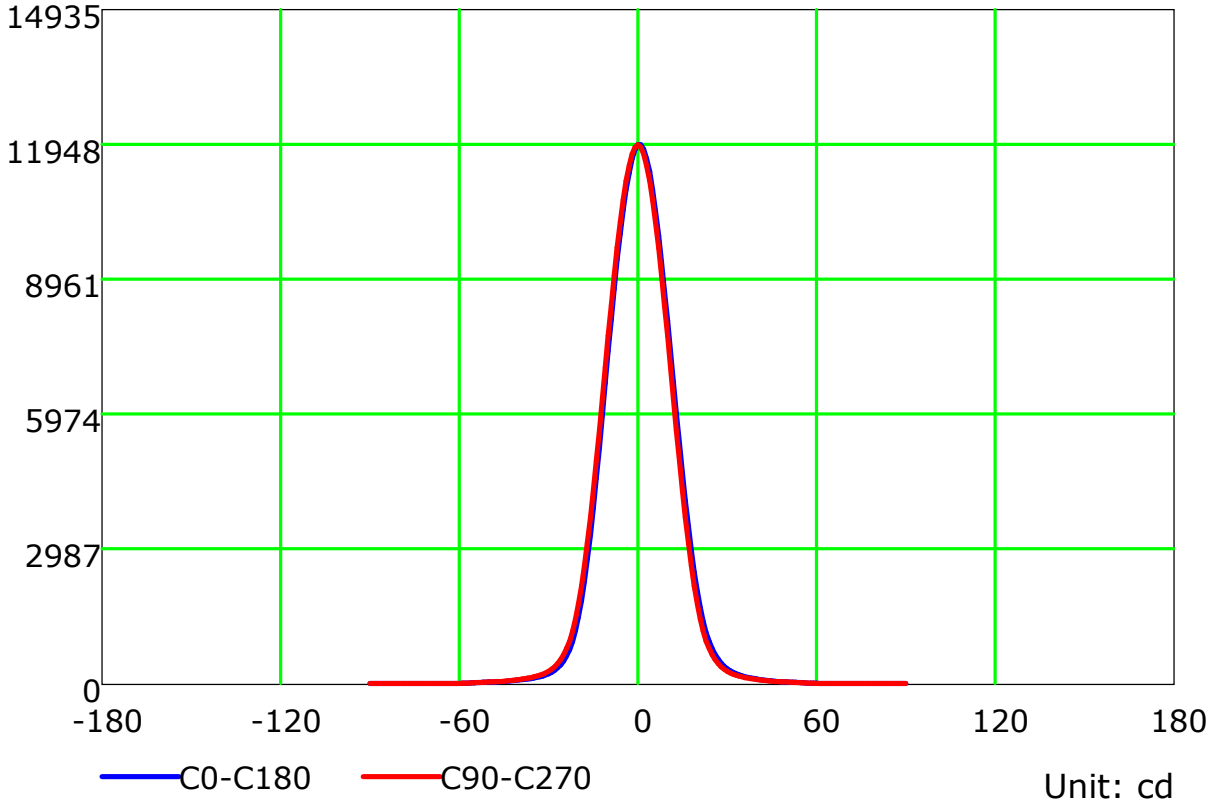

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

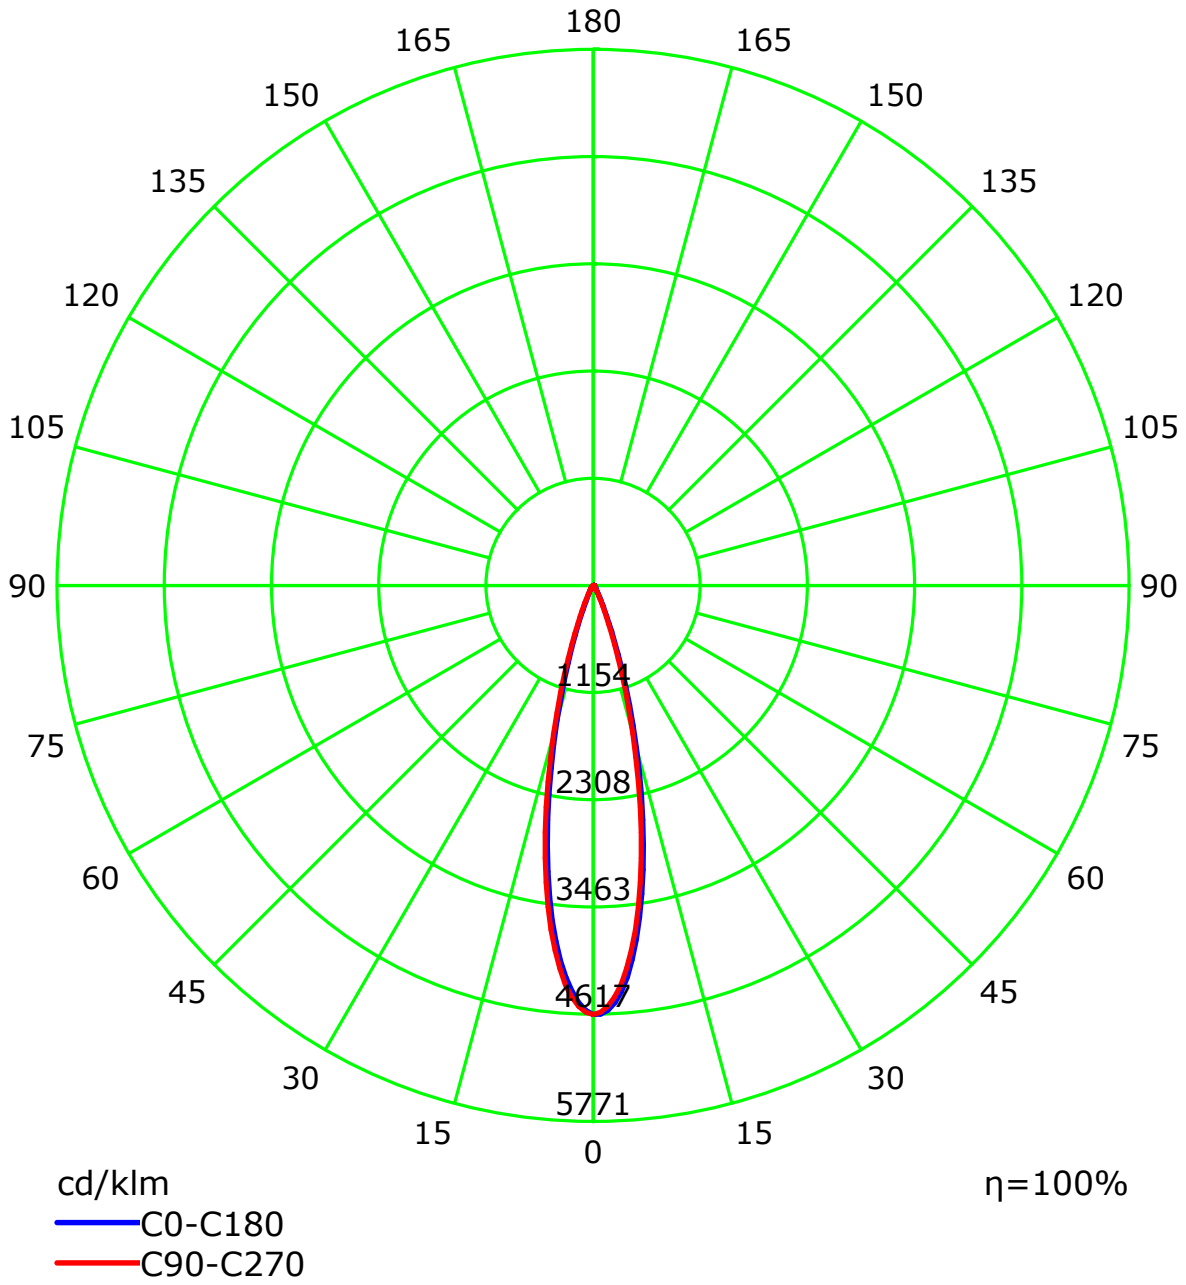

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Isocandela (rectangle)

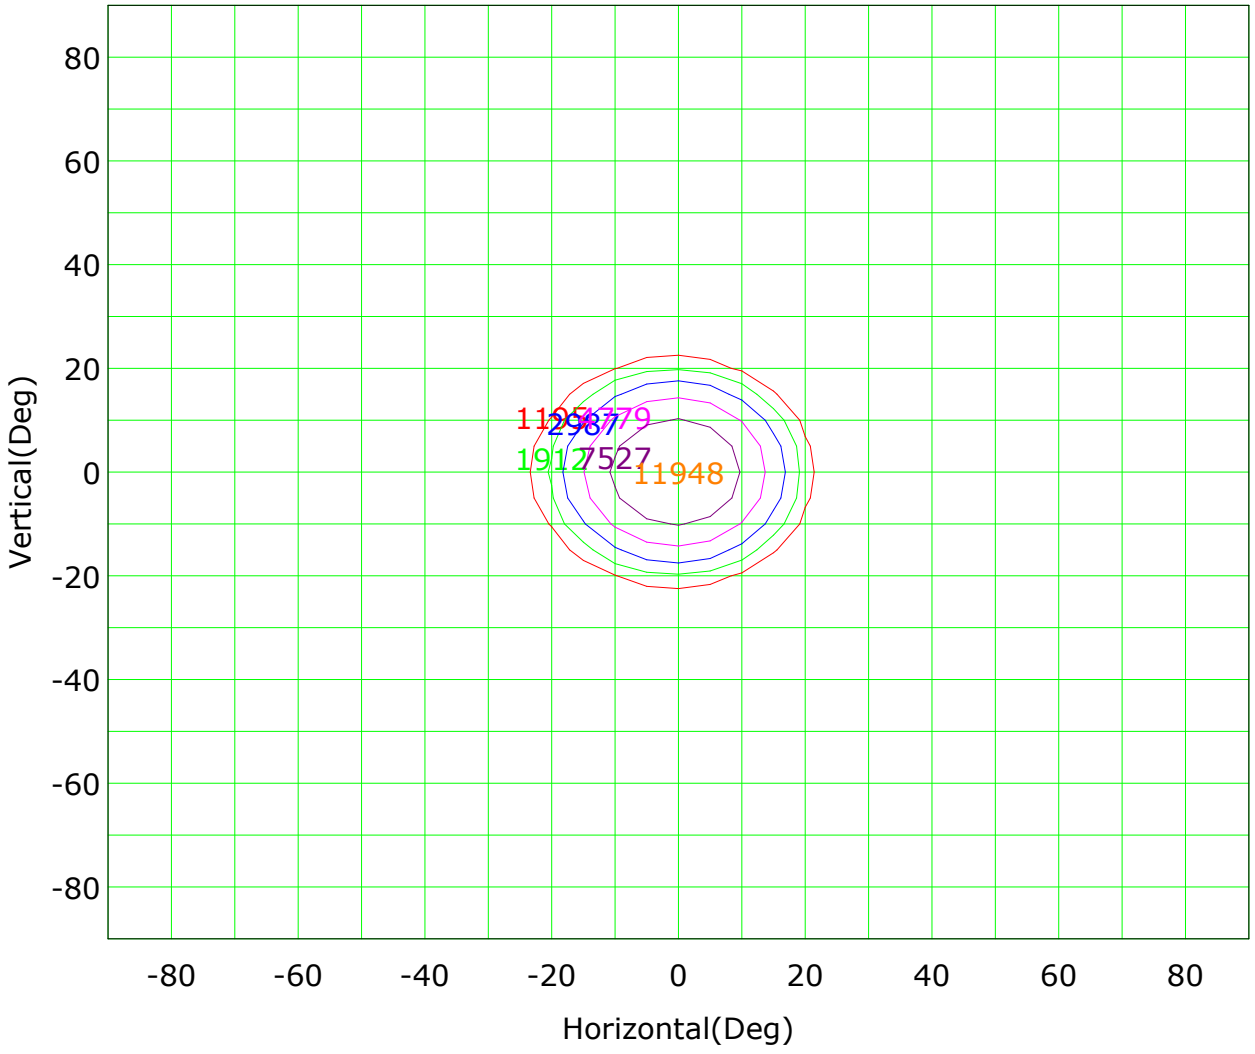


Imax (100%): 11948 cd

(10%): 1195 cd
(16%): 1912 cd
(25%): 2987 cd
(40%): 4779 cd
(63%): 7527 cd
(100%): 11948 cd

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

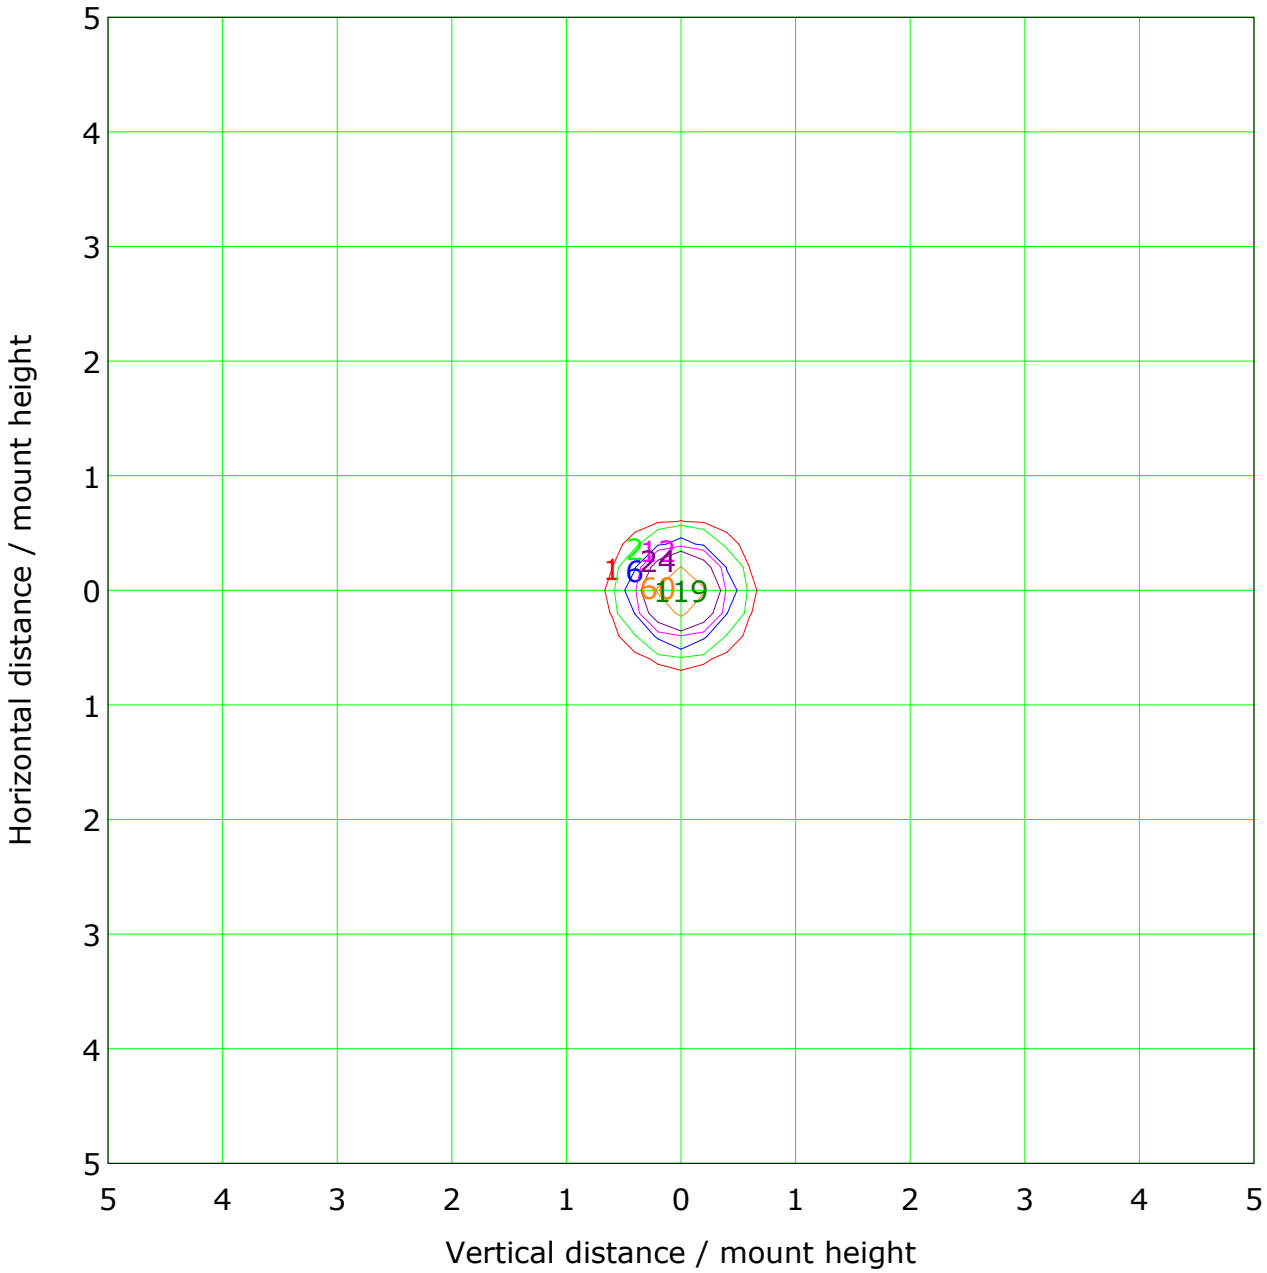


Mounting Height: 10.0m Max Lux(100%): 119.5 lx

(1%): 1.2 lx
(2%): 2.4 lx
(5%): 6.0 lx
(10%): 11.9 lx
(20%): 23.9 lx
(50%): 59.7 lx
(100%): 119.5 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
0.5	47792.64	0.22/0.22	0.0	22995.95
1.0	11948.16	0.44/0.44	0.2	5748.99
1.5	5310.29	0.66/0.66	0.3	2555.11
2.0	2987.04	0.89/0.89	0.6	1437.25
2.5	1911.71	1.11/1.11	1.0	919.84
3.0	1327.57	1.33/1.33	1.4	638.78
4.0	746.76	1.77/1.77	2.5	359.31
5.0	477.93	2.22/2.21	3.9	229.96
15.0	53.10	6.65/6.64	34.7	25.55
20.0	29.87	8.86/8.86	61.7	14.37

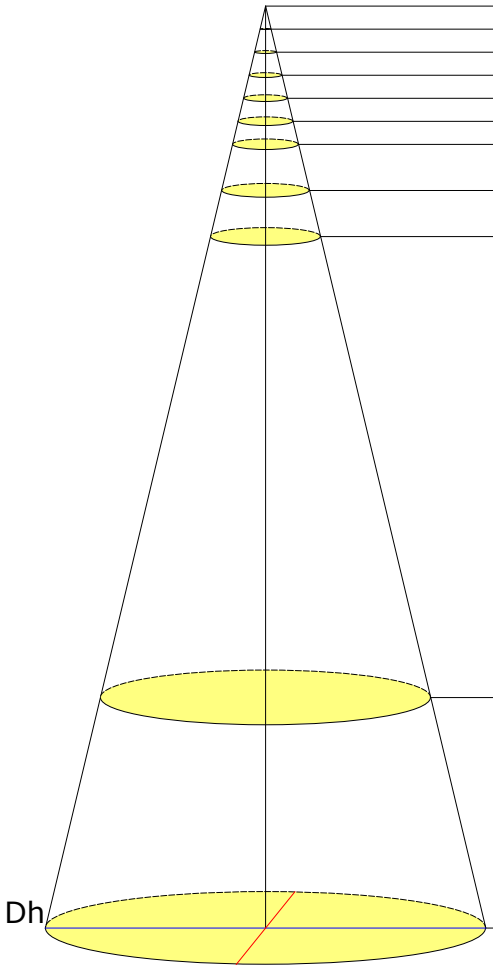


Beam Angle(B): H25.0 V25.0 Field Angle(F): H43.7 V43.7

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Vertical IsoLux Plot

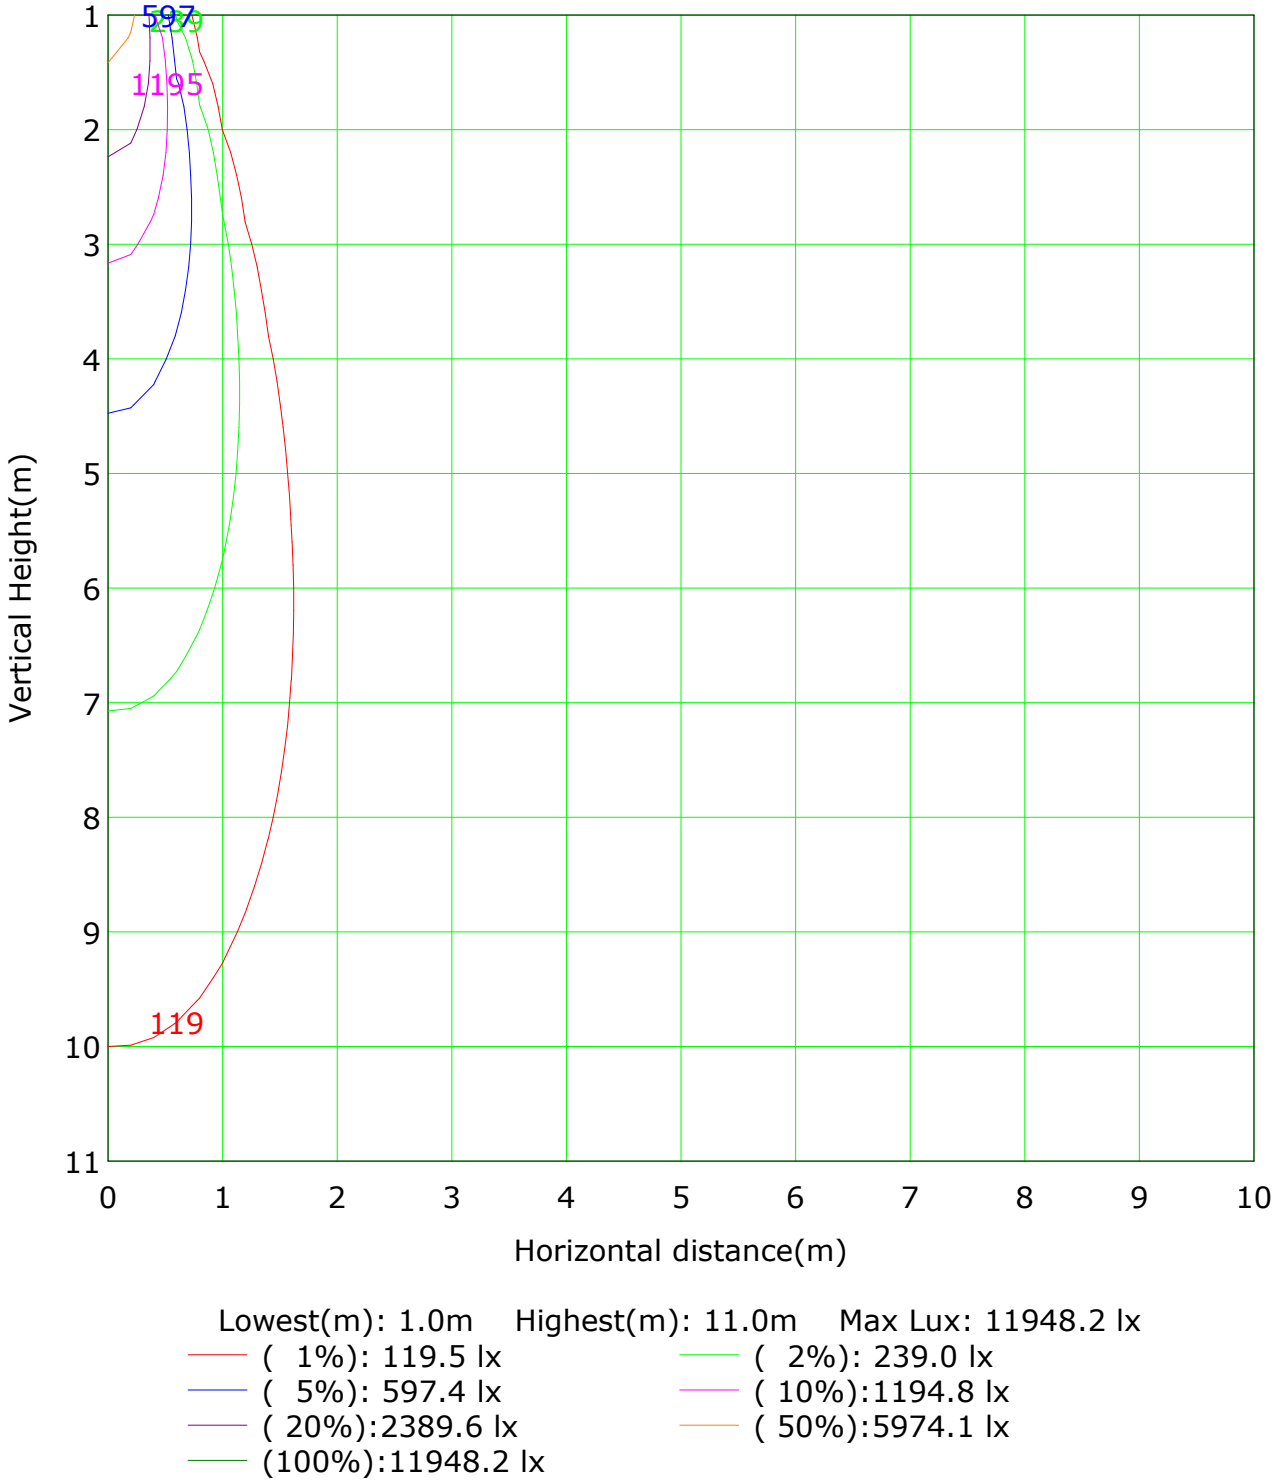

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 11948.2 lx

(1%): 119.5 lx
(2%): 239.0 lx
(5%): 597.4 lx
(10%):1194.8 lx
(20%):2389.6 lx
(50%):5974.1 lx
(100%):11948.2 lx

C Plane (°):0.0-180.0: 180.0
Gamma Plane (°):0.0-90.0:1.0
Test Lab:
Test Device: CHL-6E
Test Type: TYPE C
Distance: 3.010 m
Temperature:
Humidity:
Operator:
Inspector:

Area Flux Table

Unit: lm


Horizontal plane	Vertical plane																									
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.3	1.1	1.1	0.7	0.5	0.1	0.0	0.0	0.0	0.0	0.0	6.8	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5	1.0	3.2	3.2	1.8	1.0	0.5	0.1	0.0	0.0	0.0	0.0	18.5	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.0	2.0	15.6	15.6	4.1	2.0	1.0	0.3	0.0	0.0	0.0	0.0	63.2	3.7
-20	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.4	3.3	104.9	104.9	10.0	3.3	1.4	0.5	0.0	0.0	0.0	0.0	326.0	271.1
-10	0.0	0.0	0.0	0.0	0.0	0.0	0.6	1.7	4.6	270.6	270.6	20.0	4.6	1.7	0.6	0.0	0.0	0.0	0.0	823.0	778.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	1.7	4.7	279.0	279.0	21.1	4.7	1.7	0.6	0.0	0.0	0.0	0.0	851.3	806.8
10	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.4	3.6	121.5	121.5	11.6	3.6	1.4	0.5	0.0	0.0	0.0	0.0	377.8	324.1
20	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.0	2.2	22.3	22.3	4.9	2.2	1.0	0.3	0.0	0.0	0.0	0.0	84.6	16.8
30	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.6	1.1	4.5	4.5	2.0	1.1	0.6	0.1	0.0	0.0	0.0	0.0	23.2	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	1.3	1.3	0.8	0.5	0.2	0.0	0.0	0.0	0.0	0.0	7.7	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.4	0.4	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	1.9	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.1	2.9	9.5	23.6	77.4	354.6	824.8	824.8	354.6	77.4	23.6	9.5	2.9	0.1	0.0	0.0	2585	2201
Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 1288.32lm

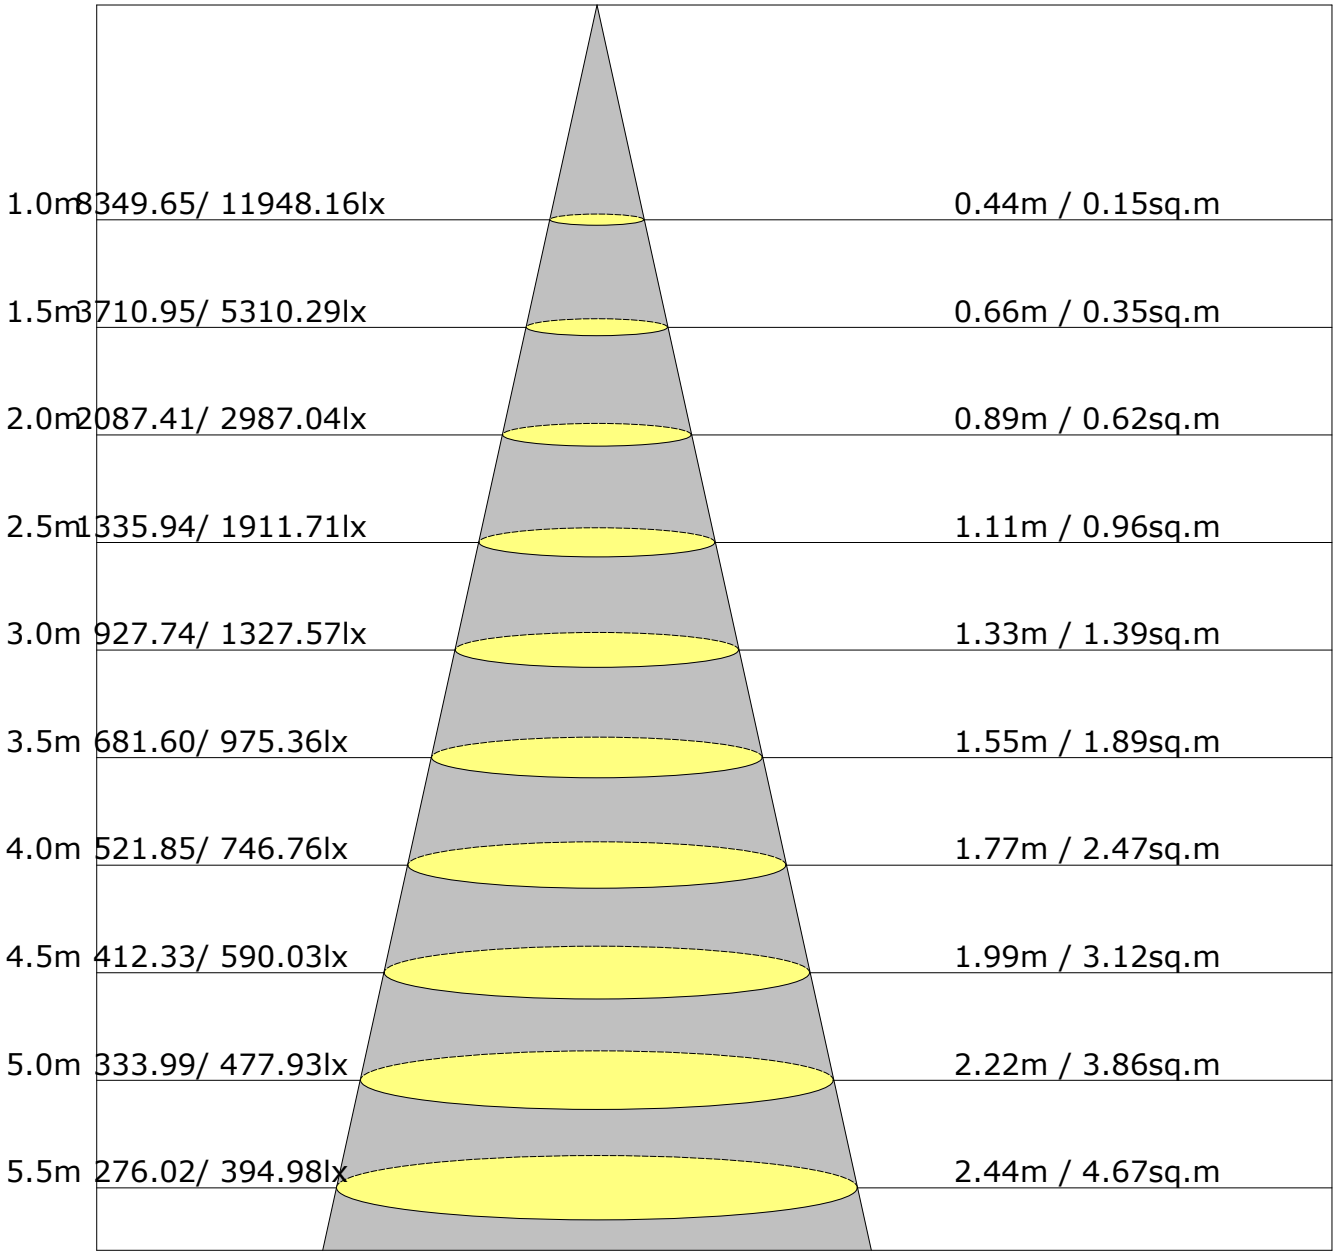

Height Avg./Nadir. E Beam Angle:25.0° Diameter / Area

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.5	15.1	14.8	15.3	15.5	14.0	14.6	14.3	14.8	15.0
3H	14.4	14.9	14.7	15.2	15.4	13.9	14.4	14.2	14.7	14.9
4H	14.3	14.8	14.6	15.1	15.3	13.8	14.3	14.1	14.6	14.9
6H	14.2	14.7	14.6	15.0	15.3	13.7	14.2	14.1	14.5	14.8
8H	14.2	14.7	14.5	15.0	15.3	13.7	14.2	14.0	14.5	14.8
12H	14.2	14.6	14.5	14.9	15.2	13.7	14.1	14.0	14.4	14.7
X=4H Y=2H	14.4	14.9	14.7	15.1	15.4	13.9	14.4	14.2	14.7	14.9
3H	14.2	14.7	14.6	15.0	15.3	13.7	14.2	14.1	14.5	14.8
4H	14.1	14.5	14.5	14.9	15.2	13.6	14.0	14.0	14.4	14.7
6H	14.0	14.4	14.4	14.8	15.1	13.6	13.9	14.0	14.3	14.7
8H	14.0	14.3	14.4	14.7	15.1	13.5	13.8	13.9	14.2	14.6
12H	13.9	14.2	14.4	14.6	15.1	13.5	13.8	13.9	14.2	14.6
X=8H Y=4H	14.0	14.3	14.4	14.7	15.1	13.5	13.8	13.9	14.2	14.6
6H	13.9	14.2	14.3	14.6	15.0	13.4	13.7	13.9	14.1	14.5
8H	13.8	14.1	14.3	14.5	15.0	13.4	13.6	13.8	14.0	14.5
12H	13.8	14.0	14.3	14.5	15.0	13.3	13.5	13.8	14.0	14.5
X=12H Y=4H	13.9	14.2	14.4	14.6	15.1	13.5	13.8	13.9	14.2	14.6
6H	13.8	14.1	14.3	14.5	15.0	13.4	13.6	13.8	14.0	14.5
8H	13.8	14.0	14.3	14.5	15.0	13.3	13.5	13.8	14.0	14.5
Variations with the observer position at spacings:										
S=1.0H	+3.6/-4.5					+3.2/-4.2				
S=1.5H	+6.1/-1.$					+5.7/-1.$				
S=2.0H	+8.1/-1.$					+7.7/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 2588lm (8log(F/F0) = 3.3).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

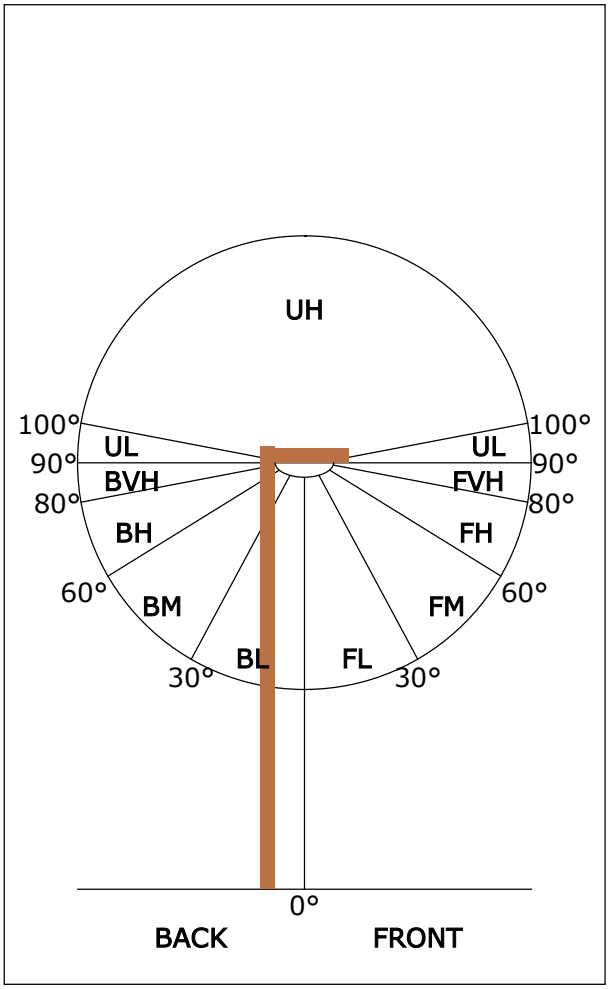

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	1348	52.1
FL (0°-30°)	1261	48.7
FM (30°-60°)	86	3.3
FH (60°-80°)	0	0.0
FVH (80°-90°)	0	0.0
BACK LIGHT	1240	47.9
BL (0°-30°)	1165	45.0
BM (30°-60°)	75	2.9
BH (60°-80°)	0	0.0
BVH (80°-90°)	0	0.0
UP LIGHT	0	0.0
UL (90°-100°)	0	0.0
UH (100°-180°)	0	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	11919.5	11.4	11.4	0.44	0.44
1.0-2.0	11815.1	33.9	45.3	1.31	1.75
2.0-3.0	11610.4	55.5	100.9	2.15	3.90
3.0-4.0	11313.8	75.7	176.6	2.93	6.83
4.0-5.0	10933.1	94.1	270.7	3.64	10.46
5.0-6.0	10472.2	110.1	380.7	4.25	14.71
6.0-7.0	9942.2	123.4	504.2	4.77	19.48
7.0-8.0	9350.8	133.8	638.0	5.17	24.66
8.0-9.0	8713.9	141.2	779.2	5.46	30.12
9.0-10.0	8046.3	145.6	924.9	5.63	35.74
10.0-11.0	7358.1	147.0	1071.9	5.68	41.43
11.0-12.0	6660.1	145.6	1217.5	5.63	47.05
12.0-13.0	5962.4	141.5	1359.0	5.47	52.52
13.0-14.0	5275.7	135.1	1494.1	5.22	57.74
14.0-15.0	4613.0	126.7	1620.8	4.89	62.64
15.0-16.0	3986.2	116.8	1737.6	4.51	67.15
16.0-17.0	3401.6	105.9	1843.5	4.09	71.25
17.0-18.0	2866.4	94.5	1938.1	3.65	74.90
18.0-19.0	2385.1	83.0	2021.0	3.21	78.11
19.0-20.0	1958.1	71.7	2092.7	2.77	80.88
20.0-21.0	1594.0	61.2	2153.9	2.37	83.24
21.0-22.0	1294.3	52.0	2206.0	2.01	85.25
22.0-23.0	1051.2	44.1	2250.1	1.70	86.96
23.0-24.0	858.6	37.5	2287.6	1.45	88.41
24.0-25.0	707.5	32.2	2319.8	1.24	89.65
25.0-26.0	587.6	27.7	2347.5	1.07	90.72
26.0-27.0	490.0	24.0	2371.5	0.93	91.65
27.0-28.0	410.5	20.8	2392.3	0.80	92.45
28.0-29.0	347.9	18.2	2410.5	0.70	93.16
29.0-30.0	298.1	16.1	2426.6	0.62	93.78
30.0-31.0	258.6	14.4	2441.0	0.56	94.34
31.0-32.0	226.2	13.0	2453.9	0.50	94.84
32.0-33.0	199.0	11.7	2465.7	0.45	95.29
33.0-34.0	176.0	10.7	2476.3	0.41	95.70
34.0-35.0	157.2	9.8	2486.1	0.38	96.08
35.0-36.0	141.7	9.0	2495.1	0.35	96.43

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	128.1	8.4	2503.5	0.32	96.75
37.0-38.0	116.1	7.7	2511.2	0.30	97.05
38.0-39.0	105.2	7.2	2518.4	0.28	97.33
39.0-40.0	95.0	6.6	2525.0	0.26	97.58
40.0-41.0	85.9	6.1	2531.1	0.24	97.82
41.0-42.0	79.2	5.8	2536.9	0.22	98.04
42.0-43.0	71.2	5.3	2542.2	0.20	98.25
43.0-44.0	63.3	4.8	2546.9	0.18	98.43
44.0-45.0	56.9	4.4	2551.3	0.17	98.60
45.0-46.0	51.3	4.0	2555.3	0.15	98.75
46.0-47.0	47.1	3.7	2559.1	0.14	98.90
47.0-48.0	42.2	3.4	2562.5	0.13	99.03
48.0-49.0	38.1	3.1	2565.6	0.12	99.15
49.0-50.0	36.6	3.0	2568.7	0.12	99.27
50.0-51.0	34.7	2.9	2571.6	0.11	99.38
51.0-52.0	31.7	2.7	2574.3	0.11	99.49
52.0-53.0	29.0	2.5	2576.8	0.10	99.59
53.0-54.0	26.4	2.3	2579.2	0.09	99.68
54.0-55.0	23.0	2.1	2581.2	0.08	99.76
55.0-56.0	18.5	1.7	2582.9	0.06	99.82
56.0-57.0	14.3	1.3	2584.2	0.05	99.87
57.0-58.0	11.7	1.1	2585.3	0.04	99.91
58.0-59.0	9.8	0.9	2586.2	0.04	99.95
59.0-60.0	7.5	0.7	2586.9	0.03	99.97
60.0-61.0	4.5	0.4	2587.3	0.02	99.99
61.0-62.0	1.9	0.2	2587.5	0.01	100.00
62.0-63.0	0.4	0.0	2587.6	0.00	100.00
63.0-64.0	0.0	0.0	2587.6	0.00	100.00
64.0-65.0	0.0	0.0	2587.6	0.00	100.00
65.0-66.0	0.0	0.0	2587.6	0.00	100.00
66.0-67.0	0.0	0.0	2587.6	0.00	100.00
67.0-68.0	0.0	0.0	2587.6	0.00	100.00
68.0-69.0	0.0	0.0	2587.6	0.00	100.00
69.0-70.0	0.0	0.0	2587.6	0.00	100.00
70.0-71.0	0.0	0.0	2587.6	0.00	100.00
71.0-72.0	0.0	0.0	2587.6	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	2587.6	0.00	100.00
73.0-74.0	0.0	0.0	2587.6	0.00	100.00
74.0-75.0	0.0	0.0	2587.6	0.00	100.00
75.0-76.0	0.0	0.0	2587.6	0.00	100.00
76.0-77.0	0.0	0.0	2587.6	0.00	100.00
77.0-78.0	0.0	0.0	2587.6	0.00	100.00
78.0-79.0	0.0	0.0	2587.6	0.00	100.00
79.0-80.0	0.0	0.0	2587.6	0.00	100.00
80.0-81.0	0.0	0.0	2587.6	0.00	100.00
81.0-82.0	0.0	0.0	2587.6	0.00	100.00
82.0-83.0	0.0	0.0	2587.6	0.00	100.00
83.0-84.0	0.0	0.0	2587.6	0.00	100.00
84.0-85.0	0.0	0.0	2587.6	0.00	100.00
85.0-86.0	0.0	0.0	2587.6	0.00	100.00
86.0-87.0	0.0	0.0	2587.6	0.00	100.00
87.0-88.0	0.0	0.0	2587.6	0.00	100.00
88.0-89.0	0.0	0.0	2587.6	0.00	100.00
89.0-90.0	0.0	0.0	2587.6	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	11948.2	11948.2								
G1.0	11943.6	11838.1								
G2.0	11847.1	11631.5								
G3.0	11642.1	11321.0								
G4.0	11346.6	10945.6								
G5.0	10947.1	10493.3								
G6.0	10475.2	9973.1								
G7.0	9927.9	9392.7								
G8.0	9335.4	8747.4								
G9.0	8700.7	8072.0								
G10.0	8044.8	7367.9								
G11.0	7361.9	6657.8								
G12.0	6677.4	5943.2								
G13.0	5997.5	5231.6								
G14.0	5325.0	4548.6								
G15.0	4678.3	3900.3								
G16.0	4067.6	3298.8								
G17.0	3487.2	2753.0								
G18.0	2956.5	2269.0								
G19.0	2475.6	1839.3								
G20.0	2042.9	1474.5								
G21.0	1682.5	1176.0								
G22.0	1382.5	936.3								
G23.0	1133.8	752.3								
G24.0	936.3	612.1								
G25.0	778.0	503.6								
G26.0	651.3	417.6								
G27.0	542.8	348.3								
G28.0	456.8	294.0								
G29.0	387.5	253.3								
G30.0	333.2	218.6								
G31.0	289.5	193.0								
G32.0	253.3	168.9								
G33.0	220.1	153.8								
G34.0	194.5	135.7								
G35.0	174.9	123.6								
G36.0	155.3	113.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	140.2	104.0								
G38.0	126.6	93.5								
G39.0	114.6	85.9								
G40.0	101.0	78.4								
G41.0	92.0	72.4								
G42.0	84.4	67.8								
G43.0	72.4	60.3								
G44.0	66.3	54.3								
G45.0	58.8	48.2								
G46.0	52.8	45.2								
G47.0	48.2	42.2								
G48.0	42.2	36.2								
G49.0	39.2	34.7								
G50.0	36.2	36.2								
G51.0	34.7	31.7								
G52.0	31.7	28.6								
G53.0	30.1	25.6								
G54.0	27.1	22.6								
G55.0	22.6	19.6								
G56.0	16.6	15.1								
G57.0	13.6	12.1								
G58.0	12.1	9.1								
G59.0	10.6	7.5								
G60.0	7.5	4.5								
G61.0	4.5	1.5								
G62.0	1.5	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C180.0								
G74.0	0.0	0.0								
G75.0	0.0	0.0								
G76.0	0.0	0.0								
G77.0	0.0	0.0								
G78.0	0.0	0.0								
G79.0	0.0	0.0								
G80.0	0.0	0.0								
G81.0	0.0	0.0								
G82.0	0.0	0.0								
G83.0	0.0	0.0								
G84.0	0.0	0.0								
G85.0	0.0	0.0								
G86.0	0.0	0.0								
G87.0	0.0	0.0								
G88.0	0.0	0.0								
G89.0	0.0	0.0								
G90.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 3.010 m
Humidity:
Inspector: