

Test Time: 2026-09-10 16:43

## Luminaire Property

Power Factor: 0.968



## Photometric Results

S/MH(C0/C180): 0.90

— C0-C180 — C90-C270

Inspector:


## Luminous Intensity Distribution Curve

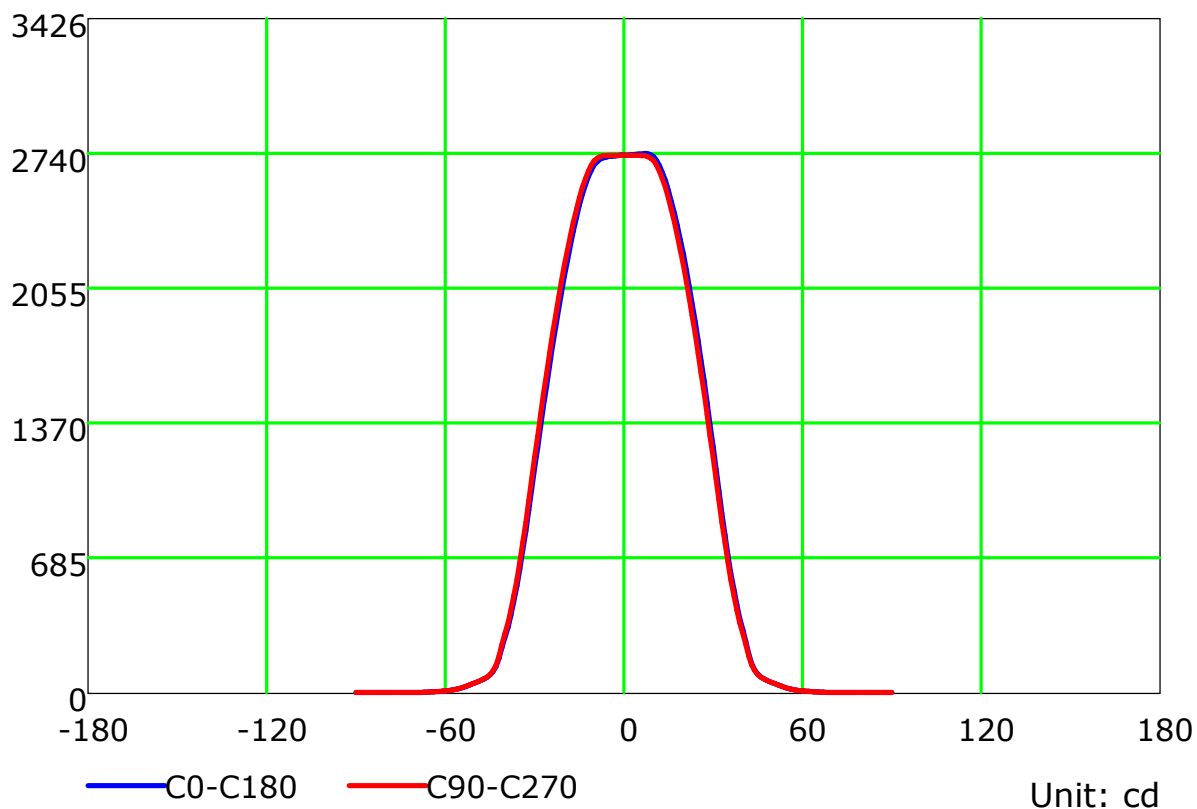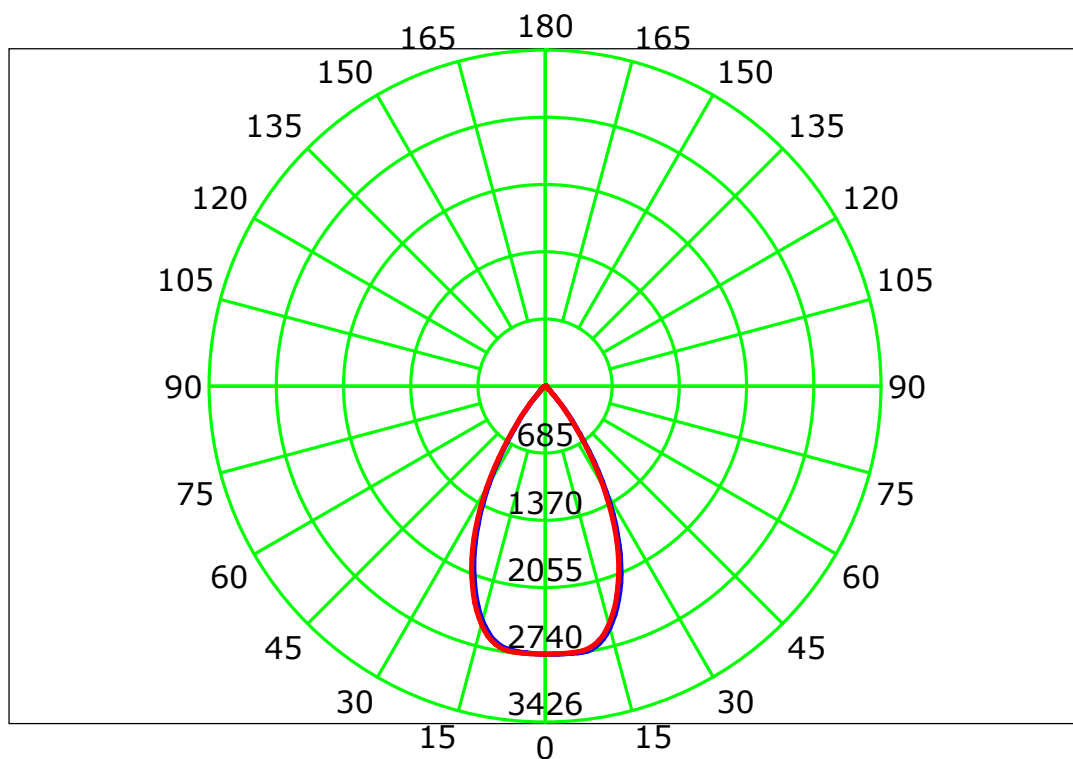

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:


## Luminous Intensity Distribution Curve(cd/klm)

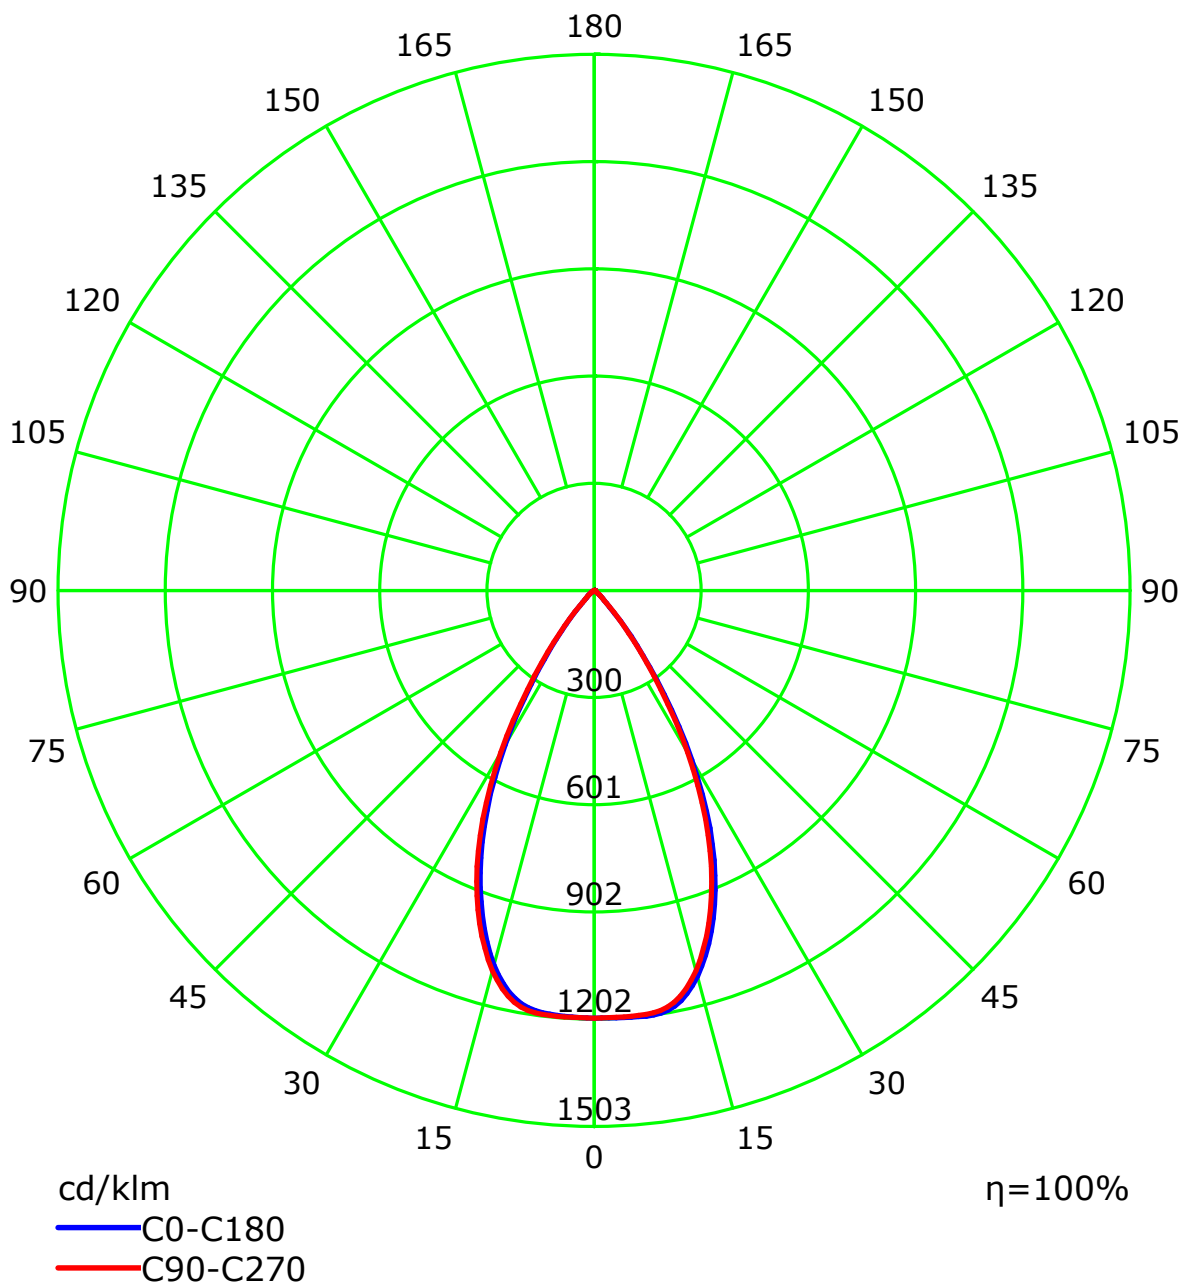

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

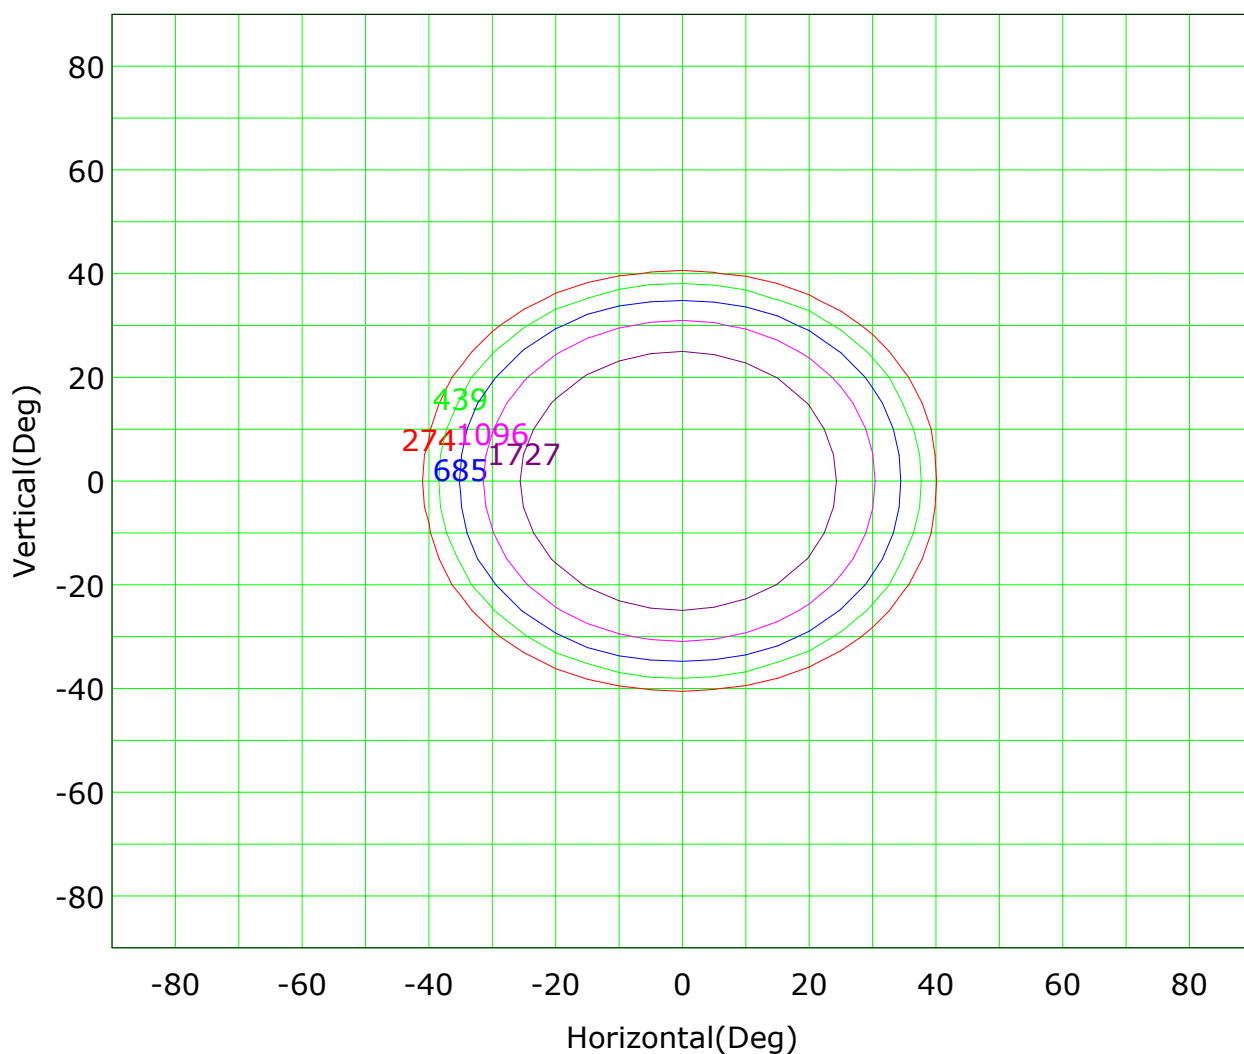

Imax (100%): 2741 cd

|                 |                 |
|-----------------|-----------------|
| ( 10%): 274 cd  | ( 16%): 439 cd  |
| ( 25%): 685 cd  | ( 40%): 1096 cd |
| ( 63%): 1727 cd | (100%): 2741 cd |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

## IsoLux Plot

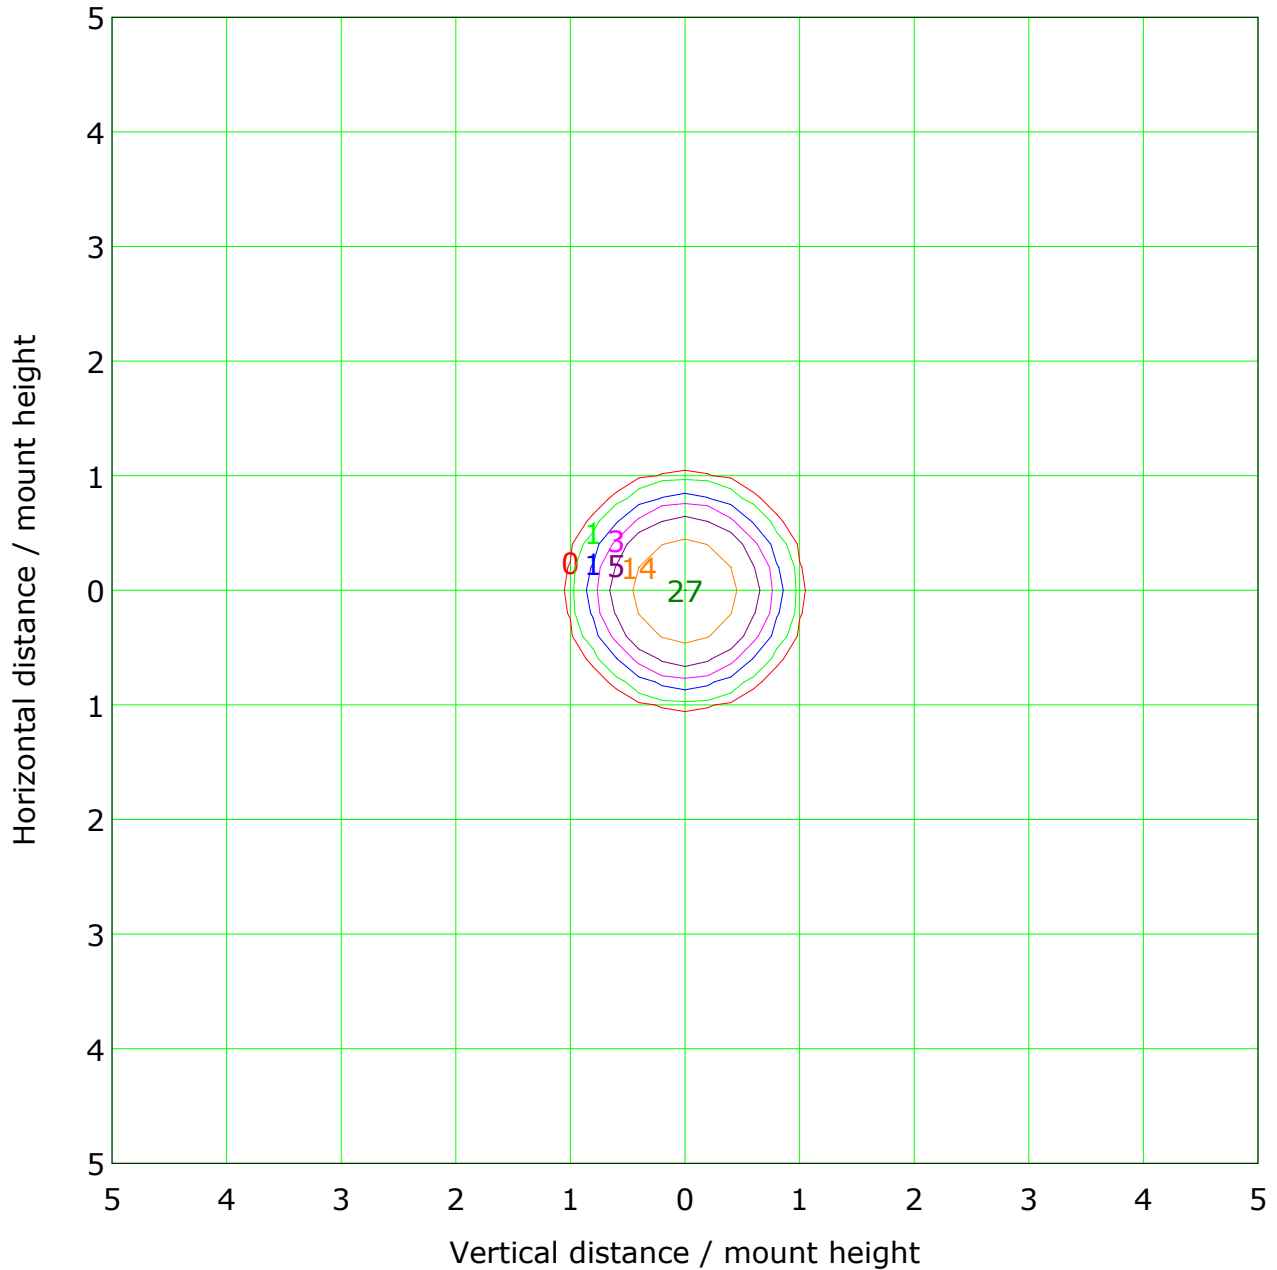

Mounting Height: 10.0m    Max Lux(100%): 27.3 lx

|                 |                 |
|-----------------|-----------------|
| ( 1%): 0.3 lx   | ( 2%): 0.5 lx   |
| ( 5%): 1.4 lx   | ( 10%): 2.7 lx  |
| ( 20%): 5.5 lx  | ( 50%): 13.7 lx |
| (100%): 27.3 lx |                 |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:


## Illuminance at a Distance

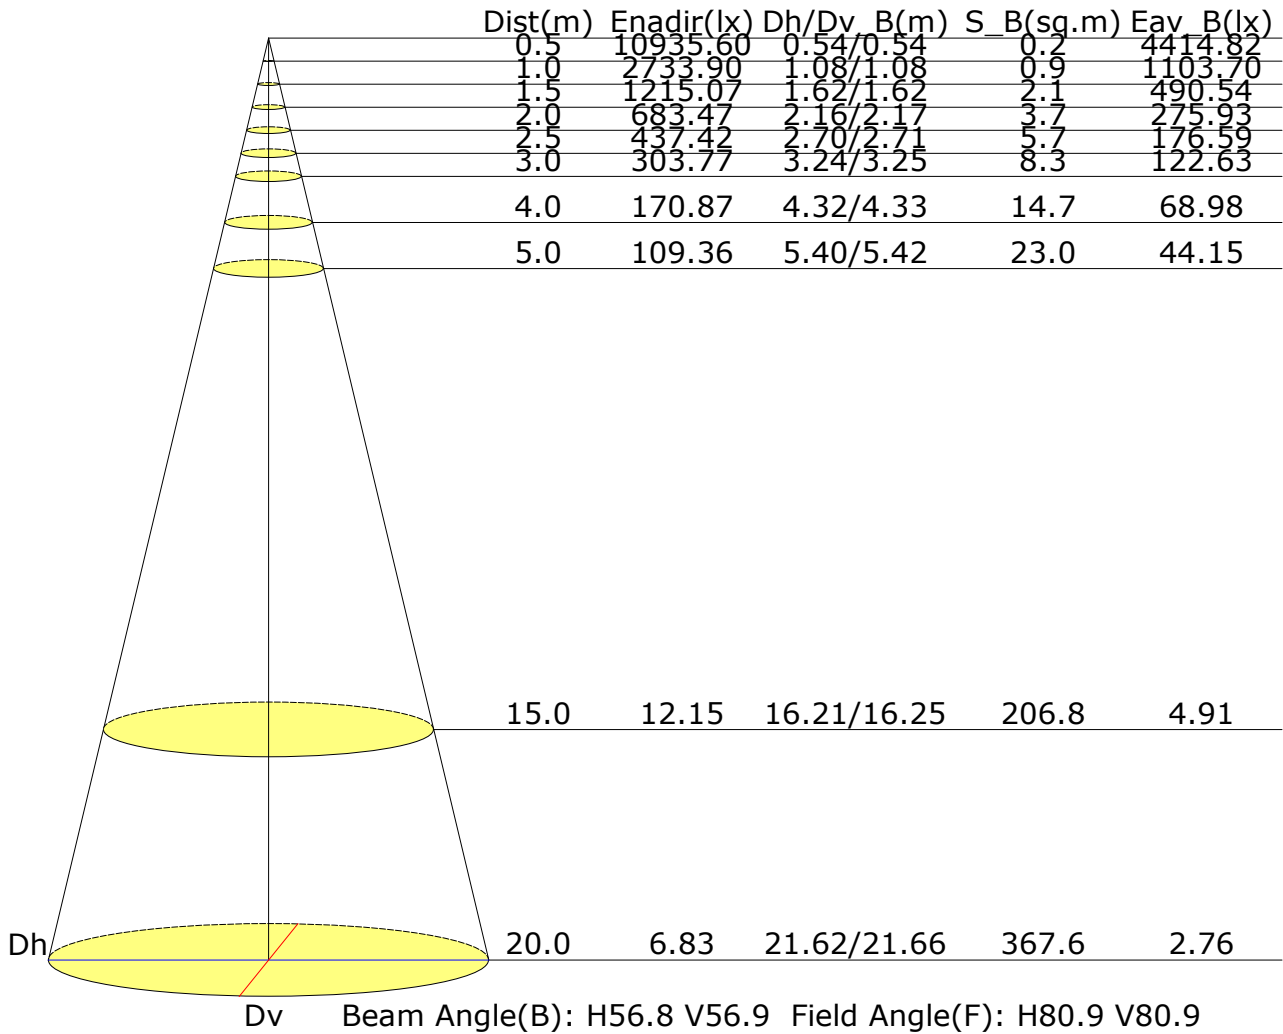

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Vertical IsoLux Plot

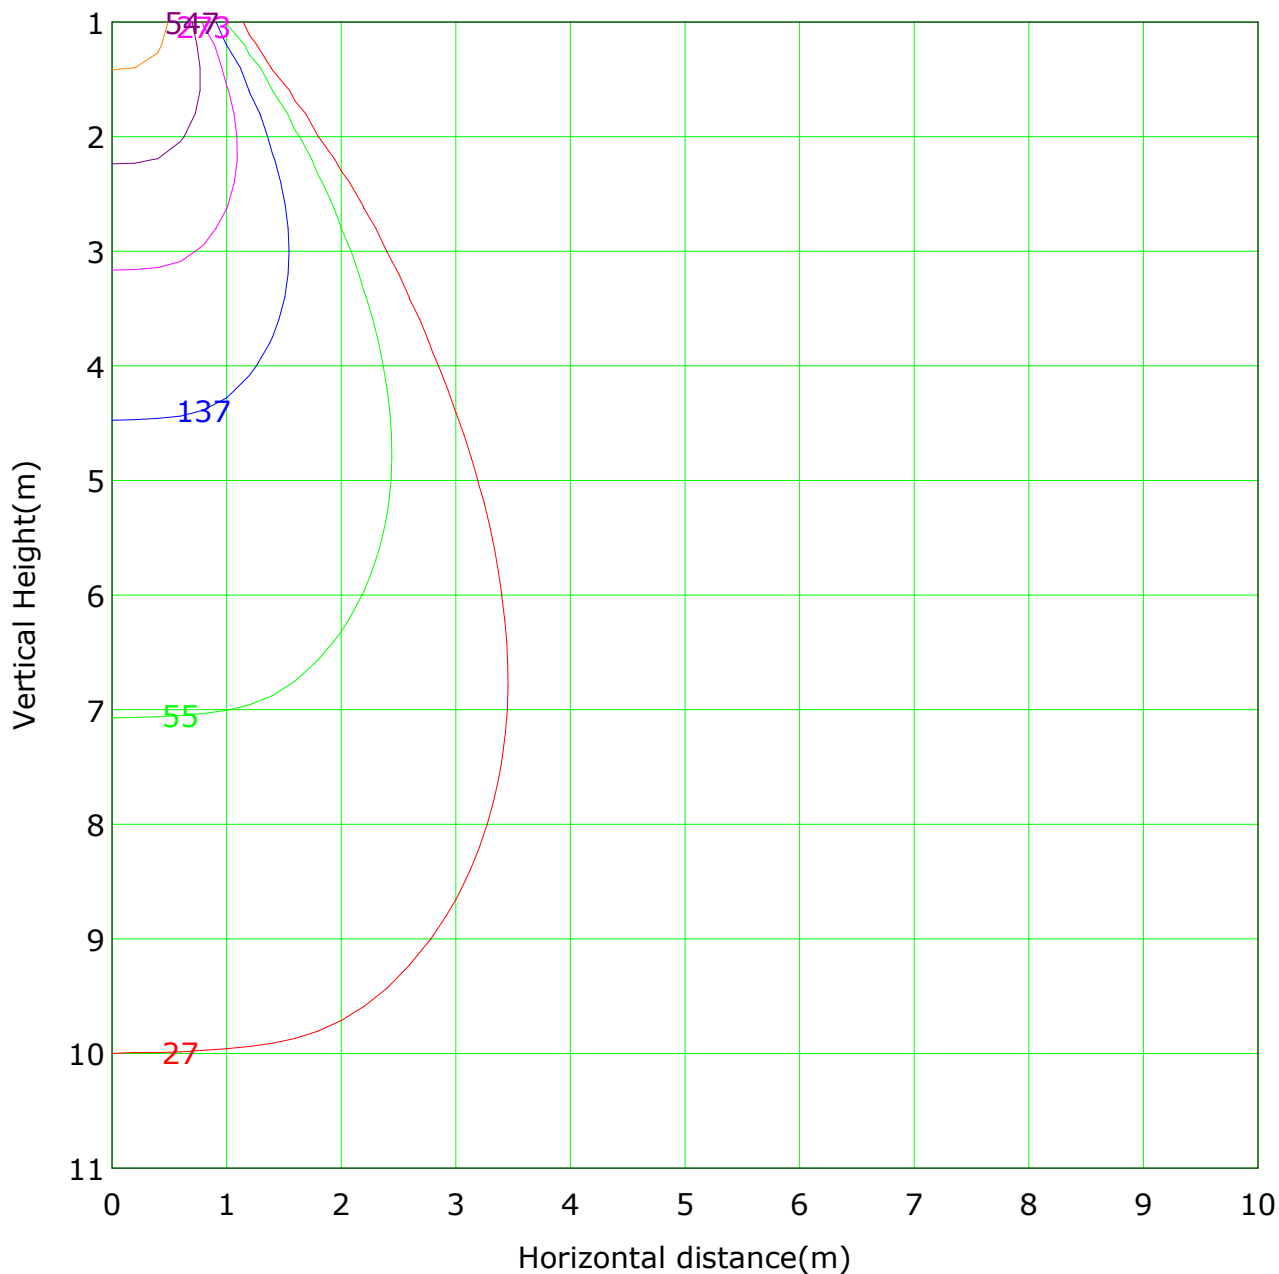


Lowest(m): 1.0m   Highest(m): 11.0m   Max Lux: 2733.9 lx  
— ( 1%): 27.3 lx   — ( 2%): 54.7 lx  
— ( 5%): 136.7 lx   — ( 10%): 273.4 lx  
— ( 20%): 546.8 lx   — ( 50%): 1366.9 lx  
— (100%): 2733.9 lx

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## The Average Illuminance Effective Figure

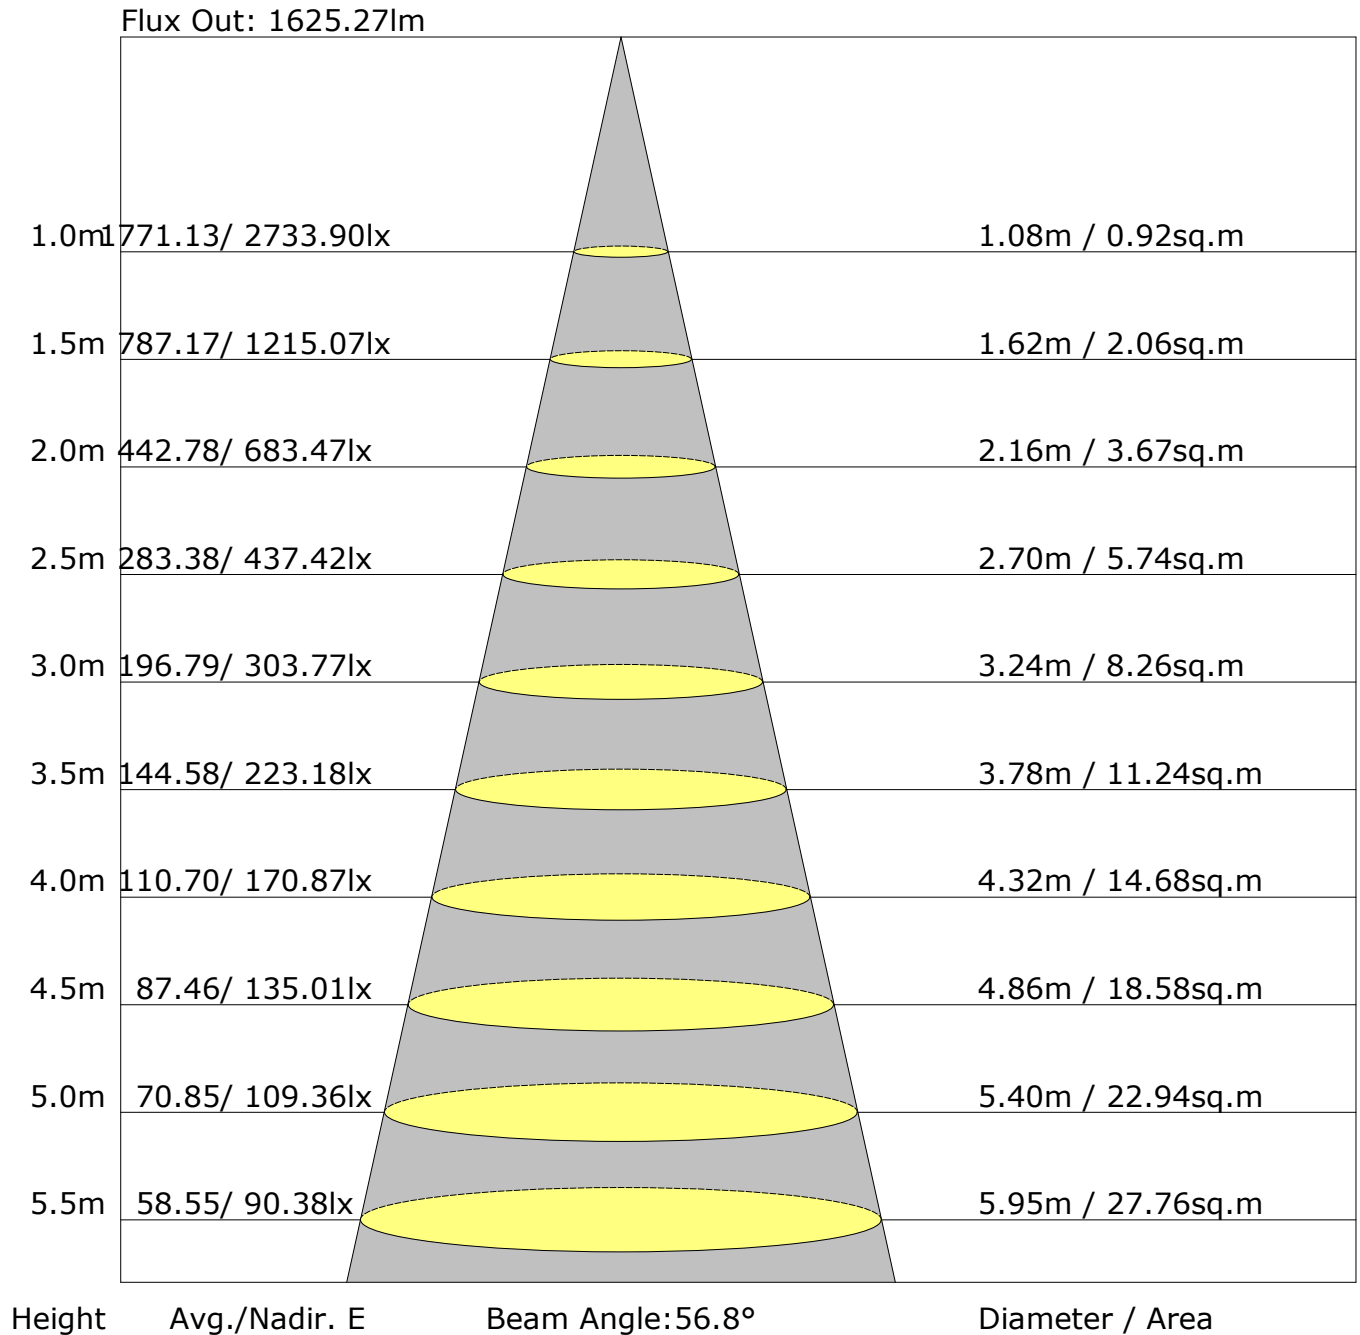

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## UGR Table

|                                                    |                  |      |      |      |      |                |      |      |      |      |
|----------------------------------------------------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflectance:                                       |                  |      |      |      |      |                |      |      |      |      |
| Ceiling (cavity)                                   | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  | 0.7            | 0.7  | 0.5  | 0.5  | 0.3  |
| Wall                                               | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  | 0.5            | 0.3  | 0.5  | 0.3  | 0.3  |
| Reference plane                                    | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  | 0.2            | 0.2  | 0.2  | 0.2  | 0.2  |
| Room dimensions                                    | Viewed crosswise |      |      |      |      | Viewed endwise |      |      |      |      |
| X=2H Y=2H                                          | 22.9             | 23.7 | 23.1 | 23.9 | 24.1 | 22.7           | 23.5 | 22.9 | 23.7 | 23.9 |
| 3H                                                 | 22.7             | 23.5 | 23.0 | 23.7 | 24.0 | 22.5           | 23.3 | 22.8 | 23.5 | 23.8 |
| 4H                                                 | 22.7             | 23.4 | 23.0 | 23.6 | 23.9 | 22.4           | 23.1 | 22.8 | 23.4 | 23.7 |
| 6H                                                 | 22.6             | 23.2 | 22.9 | 23.5 | 23.8 | 22.4           | 23.0 | 22.7 | 23.3 | 23.6 |
| 8H                                                 | 22.5             | 23.2 | 22.9 | 23.5 | 23.8 | 22.3           | 23.0 | 22.7 | 23.3 | 23.6 |
| 12H                                                | 22.5             | 23.1 | 22.9 | 23.4 | 23.7 | 22.3           | 22.9 | 22.6 | 23.2 | 23.5 |
| X=4H Y=2H                                          | 22.7             | 23.4 | 23.0 | 23.6 | 23.9 | 22.5           | 23.2 | 22.8 | 23.4 | 23.7 |
| 3H                                                 | 22.5             | 23.1 | 22.9 | 23.4 | 23.7 | 22.3           | 22.9 | 22.7 | 23.2 | 23.5 |
| 4H                                                 | 22.4             | 23.0 | 22.8 | 23.3 | 23.7 | 22.2           | 22.8 | 22.6 | 23.1 | 23.4 |
| 6H                                                 | 22.3             | 22.8 | 22.8 | 23.2 | 23.6 | 22.1           | 22.6 | 22.5 | 23.0 | 23.4 |
| 8H                                                 | 22.3             | 22.7 | 22.7 | 23.1 | 23.5 | 22.1           | 22.5 | 22.5 | 22.9 | 23.3 |
| 12H                                                | 22.3             | 22.6 | 22.7 | 23.1 | 23.5 | 22.1           | 22.4 | 22.5 | 22.8 | 23.3 |
| X=8H Y=4H                                          | 22.3             | 22.7 | 22.7 | 23.1 | 23.5 | 22.1           | 22.5 | 22.5 | 22.9 | 23.3 |
| 6H                                                 | 22.2             | 22.6 | 22.7 | 23.0 | 23.4 | 22.0           | 22.3 | 22.5 | 22.8 | 23.2 |
| 8H                                                 | 22.2             | 22.5 | 22.6 | 22.9 | 23.4 | 22.0           | 22.3 | 22.4 | 22.7 | 23.2 |
| 12H                                                | 22.1             | 22.4 | 22.6 | 22.9 | 23.3 | 21.9           | 22.2 | 22.4 | 22.6 | 23.1 |
| X=12H Y=4H                                         | 22.3             | 22.6 | 22.7 | 23.1 | 23.5 | 22.1           | 22.4 | 22.5 | 22.8 | 23.3 |
| 6H                                                 | 22.2             | 22.5 | 22.6 | 22.9 | 23.4 | 22.0           | 22.3 | 22.4 | 22.7 | 23.2 |
| 8H                                                 | 22.1             | 22.4 | 22.6 | 22.9 | 23.3 | 21.9           | 22.2 | 22.4 | 22.6 | 23.1 |
| Variations with the observer position at spacings: |                  |      |      |      |      |                |      |      |      |      |
| S=1.0H                                             | +5.3/-12.0       |      |      |      |      | +5.2/-11.8     |      |      |      |      |
| S=1.5H                                             | +8.1/-17.5       |      |      |      |      | +8.0/-17.5     |      |      |      |      |
| S=2.0H                                             | +10.1/-25.3      |      |      |      |      | +10.0/-25.6    |      |      |      |      |

Calculate in accordance with CIE Pub.117. The table is revised with 2278lm ( $8\log(F/F_0) = 2.9$ ).

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

**FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM**

|  | ZONE           | LUMENS | % LAMP LUMENS |
|--|----------------|--------|---------------|
|  | FORWARD LIGHT  | 1156   | 50.7          |
|  | FL ( 0°-30°)   | 878    | 38.5          |
|  | FM (30°-60°)   | 276    | 12.1          |
|  | FH (60°-80°)   | 2      | 0.1           |
|  | FVH (80°-90°)  | 0      | 0.0           |
|  | BACK LIGHT     | 1122   | 49.3          |
|  | BL ( 0°-30°)   | 858    | 37.6          |
|  | BM (30°-60°)   | 262    | 11.5          |
|  | BH (60°-80°)   | 2      | 0.1           |
|  | BVH (80°-90°)  | 0      | 0.0           |
|  | UP LIGHT       | 0      | 0.0           |
|  | UL (90°-100°)  | 0      | 0.0           |
|  | UH (100°-180°) | 0      | 0.0           |
|  | TRAPPED LIGHT  | NA     | NA            |

| BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07             |          |
|------------------------------------------------------------------|----------|
| Asymmetrical Luminaire Types<br>(Type I,II,III,IV)               | B2 U0 G0 |
| Quadrilateral Symmetrical Luminaire Types<br>(Type V,Area Light) | B2 U0 G0 |

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Zonal Lumen

| Gamma<br>[°] | I <sub>mean</sub><br>[cd] | Zonal Flux<br>[lm] | Sum Zonal Flux<br>[lm] | Rel Zonal Flux<br>[%] | Sum Rel Zonal Flux<br>[%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 0.0-1.0      | 2733.1                    | 2.6                | 2.6                    | 0.11                  | 0.11                      |
| 1.0-2.0      | 2732.0                    | 7.8                | 10.5                   | 0.34                  | 0.46                      |
| 2.0-3.0      | 2731.9                    | 13.1               | 23.5                   | 0.57                  | 1.03                      |
| 3.0-4.0      | 2732.1                    | 18.3               | 41.8                   | 0.80                  | 1.84                      |
| 4.0-5.0      | 2732.1                    | 23.5               | 65.3                   | 1.03                  | 2.87                      |
| 5.0-6.0      | 2731.5                    | 28.7               | 94.0                   | 1.26                  | 4.13                      |
| 6.0-7.0      | 2730.3                    | 33.9               | 127.9                  | 1.49                  | 5.61                      |
| 7.0-8.0      | 2727.6                    | 39.0               | 167.0                  | 1.71                  | 7.33                      |
| 8.0-9.0      | 2721.4                    | 44.1               | 211.1                  | 1.94                  | 9.26                      |
| 9.0-10.0     | 2710.4                    | 49.1               | 260.1                  | 2.15                  | 11.42                     |
| 10.0-11.0    | 2692.0                    | 53.8               | 313.9                  | 2.36                  | 13.78                     |
| 11.0-12.0    | 2665.7                    | 58.3               | 372.2                  | 2.56                  | 16.34                     |
| 12.0-13.0    | 2631.8                    | 62.5               | 434.7                  | 2.74                  | 19.08                     |
| 13.0-14.0    | 2590.1                    | 66.3               | 501.0                  | 2.91                  | 21.99                     |
| 14.0-15.0    | 2541.6                    | 69.8               | 570.8                  | 3.06                  | 25.05                     |
| 15.0-16.0    | 2486.2                    | 72.9               | 643.6                  | 3.20                  | 28.25                     |
| 16.0-17.0    | 2424.5                    | 75.5               | 719.1                  | 3.31                  | 31.56                     |
| 17.0-18.0    | 2358.2                    | 77.8               | 796.9                  | 3.41                  | 34.98                     |
| 18.0-19.0    | 2287.5                    | 79.6               | 876.5                  | 3.49                  | 38.47                     |
| 19.0-20.0    | 2212.2                    | 81.0               | 957.5                  | 3.55                  | 42.02                     |
| 20.0-21.0    | 2132.5                    | 81.9               | 1039.4                 | 3.59                  | 45.62                     |
| 21.0-22.0    | 2049.3                    | 82.4               | 1121.7                 | 3.61                  | 49.23                     |
| 22.0-23.0    | 1962.3                    | 82.3               | 1204.1                 | 3.61                  | 52.85                     |
| 23.0-24.0    | 1870.7                    | 81.8               | 1285.9                 | 3.59                  | 56.44                     |
| 24.0-25.0    | 1775.3                    | 80.7               | 1366.6                 | 3.54                  | 59.98                     |
| 25.0-26.0    | 1676.2                    | 79.1               | 1445.7                 | 3.47                  | 63.46                     |
| 26.0-27.0    | 1574.1                    | 77.0               | 1522.8                 | 3.38                  | 66.84                     |
| 27.0-28.0    | 1468.9                    | 74.4               | 1597.2                 | 3.26                  | 70.10                     |
| 28.0-29.0    | 1360.2                    | 71.2               | 1668.3                 | 3.12                  | 73.22                     |
| 29.0-30.0    | 1250.3                    | 67.5               | 1735.8                 | 2.96                  | 76.19                     |
| 30.0-31.0    | 1140.7                    | 63.5               | 1799.3                 | 2.79                  | 78.97                     |
| 31.0-32.0    | 1031.3                    | 59.1               | 1858.4                 | 2.59                  | 81.57                     |
| 32.0-33.0    | 922.0                     | 54.3               | 1912.7                 | 2.38                  | 83.95                     |
| 33.0-34.0    | 814.8                     | 49.3               | 1962.1                 | 2.16                  | 86.12                     |
| 34.0-35.0    | 713.4                     | 44.3               | 2006.4                 | 1.94                  | 88.06                     |
| 35.0-36.0    | 619.3                     | 39.4               | 2045.8                 | 1.73                  | 89.79                     |

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Zonal Lumen (Continue 1)

| Gamma<br>[°] | I <sub>mean</sub><br>[cd] | Zonal Flux<br>[lm] | Sum Zonal Flux<br>[lm] | Rel Zonal Flux<br>[%] | Sum Rel Zonal Flux<br>[%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 36.0-37.0    | 533.7                     | 34.8               | 2080.6                 | 1.53                  | 91.32                     |
| 37.0-38.0    | 456.2                     | 30.5               | 2111.1                 | 1.34                  | 92.66                     |
| 38.0-39.0    | 386.6                     | 26.4               | 2137.5                 | 1.16                  | 93.82                     |
| 39.0-40.0    | 326.1                     | 22.7               | 2160.2                 | 1.00                  | 94.81                     |
| 40.0-41.0    | 271.6                     | 19.3               | 2179.6                 | 0.85                  | 95.66                     |
| 41.0-42.0    | 215.8                     | 15.7               | 2195.2                 | 0.69                  | 96.35                     |
| 42.0-43.0    | 164.0                     | 12.1               | 2207.4                 | 0.53                  | 96.88                     |
| 43.0-44.0    | 126.0                     | 9.5                | 2216.9                 | 0.42                  | 97.30                     |
| 44.0-45.0    | 101.5                     | 7.8                | 2224.7                 | 0.34                  | 97.64                     |
| 45.0-46.0    | 85.9                      | 6.7                | 2231.4                 | 0.29                  | 97.94                     |
| 46.0-47.0    | 74.8                      | 6.0                | 2237.4                 | 0.26                  | 98.20                     |
| 47.0-48.0    | 66.1                      | 5.3                | 2242.7                 | 0.23                  | 98.43                     |
| 48.0-49.0    | 58.9                      | 4.8                | 2247.5                 | 0.21                  | 98.65                     |
| 49.0-50.0    | 52.9                      | 4.4                | 2252.0                 | 0.19                  | 98.84                     |
| 50.0-51.0    | 47.2                      | 4.0                | 2256.0                 | 0.18                  | 99.02                     |
| 51.0-52.0    | 41.5                      | 3.6                | 2259.5                 | 0.16                  | 99.17                     |
| 52.0-53.0    | 35.6                      | 3.1                | 2262.6                 | 0.14                  | 99.31                     |
| 53.0-54.0    | 30.0                      | 2.6                | 2265.3                 | 0.12                  | 99.42                     |
| 54.0-55.0    | 24.9                      | 2.2                | 2267.5                 | 0.10                  | 99.52                     |
| 55.0-56.0    | 20.4                      | 1.8                | 2269.3                 | 0.08                  | 99.60                     |
| 56.0-57.0    | 16.7                      | 1.5                | 2270.8                 | 0.07                  | 99.67                     |
| 57.0-58.0    | 13.7                      | 1.3                | 2272.1                 | 0.06                  | 99.73                     |
| 58.0-59.0    | 11.7                      | 1.1                | 2273.2                 | 0.05                  | 99.77                     |
| 59.0-60.0    | 10.0                      | 0.9                | 2274.1                 | 0.04                  | 99.81                     |
| 60.0-61.0    | 8.5                       | 0.8                | 2275.0                 | 0.04                  | 99.85                     |
| 61.0-62.0    | 7.1                       | 0.7                | 2275.6                 | 0.03                  | 99.88                     |
| 62.0-63.0    | 5.9                       | 0.6                | 2276.2                 | 0.03                  | 99.91                     |
| 63.0-64.0    | 4.8                       | 0.5                | 2276.7                 | 0.02                  | 99.93                     |
| 64.0-65.0    | 4.0                       | 0.4                | 2277.1                 | 0.02                  | 99.94                     |
| 65.0-66.0    | 3.0                       | 0.3                | 2277.4                 | 0.01                  | 99.96                     |
| 66.0-67.0    | 2.1                       | 0.2                | 2277.6                 | 0.01                  | 99.97                     |
| 67.0-68.0    | 1.5                       | 0.2                | 2277.7                 | 0.01                  | 99.97                     |
| 68.0-69.0    | 1.1                       | 0.1                | 2277.9                 | 0.00                  | 99.98                     |
| 69.0-70.0    | 0.7                       | 0.1                | 2277.9                 | 0.00                  | 99.98                     |
| 70.0-71.0    | 0.4                       | 0.0                | 2278.0                 | 0.00                  | 99.98                     |
| 71.0-72.0    | 0.3                       | 0.0                | 2278.0                 | 0.00                  | 99.98                     |

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Candlepower Table

Unit: cd

| G\C   | C0.0   | C180.0 |  |  |  |  |  |  |  |  |
|-------|--------|--------|--|--|--|--|--|--|--|--|
| G0.0  | 2733.9 | 2733.9 |  |  |  |  |  |  |  |  |
| G1.0  | 2731.5 | 2733.0 |  |  |  |  |  |  |  |  |
| G2.0  | 2733.1 | 2730.3 |  |  |  |  |  |  |  |  |
| G3.0  | 2735.6 | 2728.8 |  |  |  |  |  |  |  |  |
| G4.0  | 2736.4 | 2727.7 |  |  |  |  |  |  |  |  |
| G5.0  | 2737.8 | 2726.2 |  |  |  |  |  |  |  |  |
| G6.0  | 2739.1 | 2722.8 |  |  |  |  |  |  |  |  |
| G7.0  | 2740.8 | 2718.4 |  |  |  |  |  |  |  |  |
| G8.0  | 2739.4 | 2711.7 |  |  |  |  |  |  |  |  |
| G9.0  | 2735.4 | 2699.2 |  |  |  |  |  |  |  |  |
| G10.0 | 2724.7 | 2682.3 |  |  |  |  |  |  |  |  |
| G11.0 | 2705.5 | 2655.7 |  |  |  |  |  |  |  |  |
| G12.0 | 2679.1 | 2622.6 |  |  |  |  |  |  |  |  |
| G13.0 | 2644.3 | 2581.4 |  |  |  |  |  |  |  |  |
| G14.0 | 2603.0 | 2532.0 |  |  |  |  |  |  |  |  |
| G15.0 | 2552.8 | 2478.8 |  |  |  |  |  |  |  |  |
| G16.0 | 2497.3 | 2415.9 |  |  |  |  |  |  |  |  |
| G17.0 | 2438.0 | 2346.7 |  |  |  |  |  |  |  |  |
| G18.0 | 2374.0 | 2274.0 |  |  |  |  |  |  |  |  |
| G19.0 | 2303.8 | 2198.2 |  |  |  |  |  |  |  |  |
| G20.0 | 2230.2 | 2116.7 |  |  |  |  |  |  |  |  |
| G21.0 | 2150.6 | 2032.4 |  |  |  |  |  |  |  |  |
| G22.0 | 2067.0 | 1947.0 |  |  |  |  |  |  |  |  |
| G23.0 | 1977.9 | 1857.1 |  |  |  |  |  |  |  |  |
| G24.0 | 1886.1 | 1761.9 |  |  |  |  |  |  |  |  |
| G25.0 | 1790.0 | 1663.1 |  |  |  |  |  |  |  |  |
| G26.0 | 1689.1 | 1562.5 |  |  |  |  |  |  |  |  |
| G27.0 | 1585.2 | 1459.8 |  |  |  |  |  |  |  |  |
| G28.0 | 1476.0 | 1354.6 |  |  |  |  |  |  |  |  |
| G29.0 | 1362.4 | 1247.7 |  |  |  |  |  |  |  |  |
| G30.0 | 1251.0 | 1140.3 |  |  |  |  |  |  |  |  |
| G31.0 | 1137.8 | 1033.6 |  |  |  |  |  |  |  |  |
| G32.0 | 1025.9 | 927.9  |  |  |  |  |  |  |  |  |
| G33.0 | 911.8  | 822.3  |  |  |  |  |  |  |  |  |
| G34.0 | 802.2  | 723.1  |  |  |  |  |  |  |  |  |
| G35.0 | 699.7  | 628.5  |  |  |  |  |  |  |  |  |
| G36.0 | 606.9  | 542.0  |  |  |  |  |  |  |  |  |

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 3.010 m  
Humidity:  
Inspector:

## Candlepower Table (Continue 1)

Unit: cd

| G\C   | C0.0  | C180.0 |  |  |  |  |  |  |  |  |
|-------|-------|--------|--|--|--|--|--|--|--|--|
| G37.0 | 523.4 | 462.6  |  |  |  |  |  |  |  |  |
| G38.0 | 446.7 | 392.3  |  |  |  |  |  |  |  |  |
| G39.0 | 377.1 | 330.2  |  |  |  |  |  |  |  |  |
| G40.0 | 318.1 | 278.8  |  |  |  |  |  |  |  |  |
| G41.0 | 260.3 | 229.3  |  |  |  |  |  |  |  |  |
| G42.0 | 198.2 | 175.4  |  |  |  |  |  |  |  |  |
| G43.0 | 148.6 | 133.8  |  |  |  |  |  |  |  |  |
| G44.0 | 115.5 | 106.3  |  |  |  |  |  |  |  |  |
| G45.0 | 94.4  | 89.8   |  |  |  |  |  |  |  |  |
| G46.0 | 80.9  | 78.4   |  |  |  |  |  |  |  |  |
| G47.0 | 70.7  | 69.4   |  |  |  |  |  |  |  |  |
| G48.0 | 62.3  | 62.0   |  |  |  |  |  |  |  |  |
| G49.0 | 55.8  | 55.5   |  |  |  |  |  |  |  |  |
| G50.0 | 50.0  | 50.0   |  |  |  |  |  |  |  |  |
| G51.0 | 44.4  | 44.4   |  |  |  |  |  |  |  |  |
| G52.0 | 38.6  | 38.4   |  |  |  |  |  |  |  |  |
| G53.0 | 32.9  | 32.4   |  |  |  |  |  |  |  |  |
| G54.0 | 27.3  | 27.3   |  |  |  |  |  |  |  |  |
| G55.0 | 22.4  | 22.4   |  |  |  |  |  |  |  |  |
| G56.0 | 18.5  | 18.3   |  |  |  |  |  |  |  |  |
| G57.0 | 15.0  | 14.9   |  |  |  |  |  |  |  |  |
| G58.0 | 12.5  | 12.6   |  |  |  |  |  |  |  |  |
| G59.0 | 11.0  | 10.7   |  |  |  |  |  |  |  |  |
| G60.0 | 9.3   | 9.2    |  |  |  |  |  |  |  |  |
| G61.0 | 7.8   | 7.7    |  |  |  |  |  |  |  |  |
| G62.0 | 6.6   | 6.3    |  |  |  |  |  |  |  |  |
| G63.0 | 5.4   | 5.1    |  |  |  |  |  |  |  |  |
| G64.0 | 4.8   | 4.1    |  |  |  |  |  |  |  |  |
| G65.0 | 3.8   | 3.3    |  |  |  |  |  |  |  |  |
| G66.0 | 2.5   | 2.3    |  |  |  |  |  |  |  |  |
| G67.0 | 2.0   | 1.8    |  |  |  |  |  |  |  |  |
| G68.0 | 1.4   | 1.0    |  |  |  |  |  |  |  |  |
| G69.0 | 1.0   | 0.8    |  |  |  |  |  |  |  |  |
| G70.0 | 0.8   | 0.2    |  |  |  |  |  |  |  |  |
| G71.0 | 0.4   | 0.2    |  |  |  |  |  |  |  |  |
| G72.0 | 0.4   | 0.2    |  |  |  |  |  |  |  |  |
| G73.0 | 0.3   | 0.3    |  |  |  |  |  |  |  |  |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 3.010 m

Humidity:

Inspector:

Unit: cd

[illegible]

Inspector: