

MAGNETIC LIGHTING SYSTEM

ONE TRACK. MULTIPLE
POSSIBILITIES.

Spotlights. Linear light.
Wall wash. Precision
lighting.
All within one flexible
system.

SPECTRUM MAGNETIC MODULAR MAGNETIC SPOTLIGHT SYSTEM

SPECTRUM MAGNETIC brings the SPECTRUM design language into a compact low-voltage magnetic track system.

Four body sizes from Ø25 to Ø55 allow designers to scale the light precisely to different spaces and display needs — from subtle highlights to stronger accent lighting — while keeping one consistent visual language.

With fixed and adjustable versions, the same magnetic system can adapt easily as layouts, displays and lighting priorities change.



ONE FAMILY. FOUR
SCALES.
Ø25 / Ø35 / Ø45 / Ø55

MOVE THE LIGHT. NOT
THE CEILING.
Flexible Magnetic
Positioning

FIXED OR
ADJUSTABLE
Two Lighting
Approaches


SMALLER FORM.
MORE FREEDOM.
Compact Low-Voltage
Design

SPECTRUM LOW VOLTAGE TRACK LIGHT




Model	62.02513	62.03517	62.04531	62.05518
Dimensions	Ø25*60mm	Ø35*90mm	Ø45*125mm	Ø55*140mm
Power	4W 36V 80mA	9W 36V 200mA	15W 36V 350mA	25W 36V 600mA
Luminous flux	3000K 197lm	3000K 612lm	3000K 1083lm	3000K 2615lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V	DC48V	DC48V
Beam Angle	17°/26°/31°/53°	16°/23°/38°/49°	19°/24°/36°/43°	20°/31°/43°/52°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Display / Retail	Retail / Residential	Retail / Gallery	Showroom / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

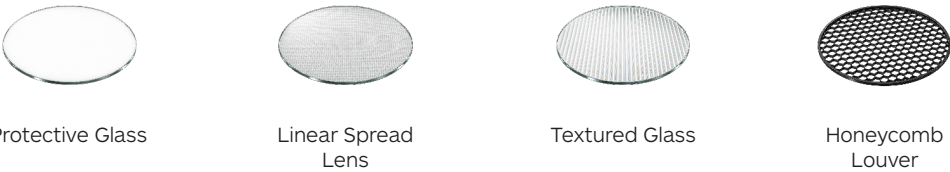

APPLICATIONS
Flexible accent lighting for retail, residential and hospitality spaces where compact scale and precise aiming matter.

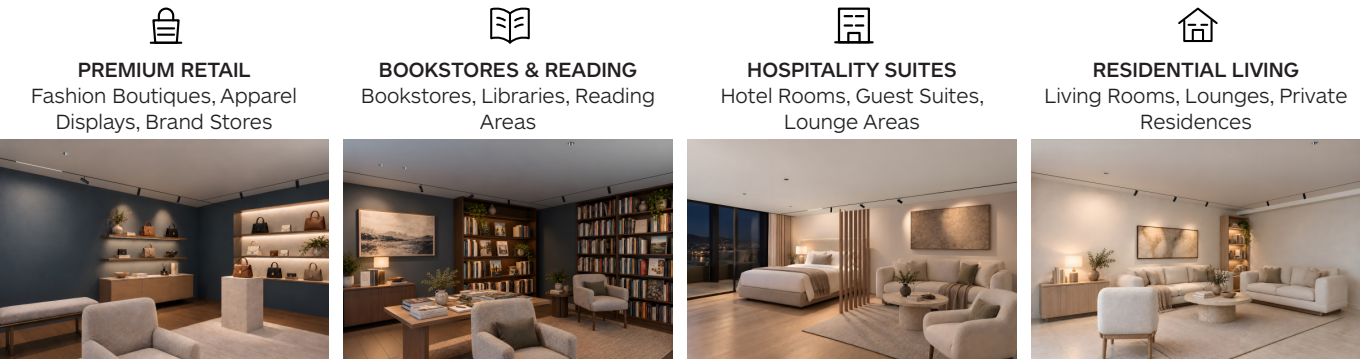

BEAMX

PRECISION MAGNETIC SPOTLIGHT

BEAMX brings precision accent lighting into a compact low-voltage magnetic system.

Its controlled optics concentrate light onto smaller targets with reduced spill, while magnetic positioning makes it easy to redirect the beam as displays and focal points change.

Designed for detail-focused retail and display environments, BEAMX combines precise light control with the flexibility of a magnetic track system.



SMALL TARGET.
PRECISE LIGHT.
Focused Narrow Beam


PRECISION THAT CAN
MOVE
Flexible Magnetic
Positioning

COMPACT, BUT
HIGHLY FOCUSED
Ø45 / Ø53 / Ø62

MADE FOR DETAIL.
Products / Objects /
Displays


BEAMX

LOW VOLTAGE TRACK LIGHT

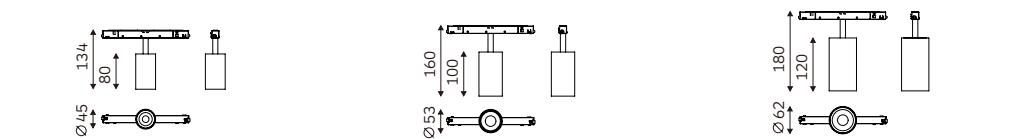


Model	62.04539	62.05312	62.06226
Dimensions	Ø45*80mm	Ø53*100mm	Ø62*120mm
Power	10W 36V 250mA	15W 36V 350mA	20W 36V 500mA
Luminous flux	3000K 903lm	3000K 1396lm	3000K 1958lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V	DC48V
Beam Angle	20°/27°/40°/55°	18°/31°/41°/53°	17°/27°/37°/51°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Display	Retail / Gallery	Showroom / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

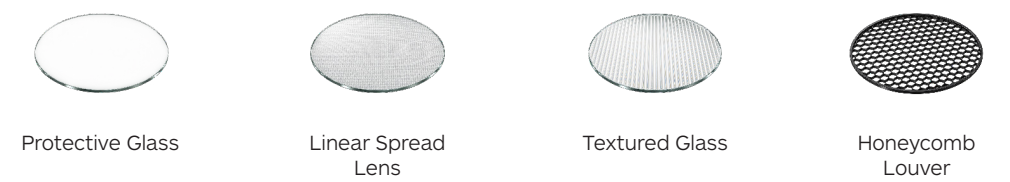

APPLICATIONS
Focused accent lighting for small targets, product displays and detail-oriented retail spaces.

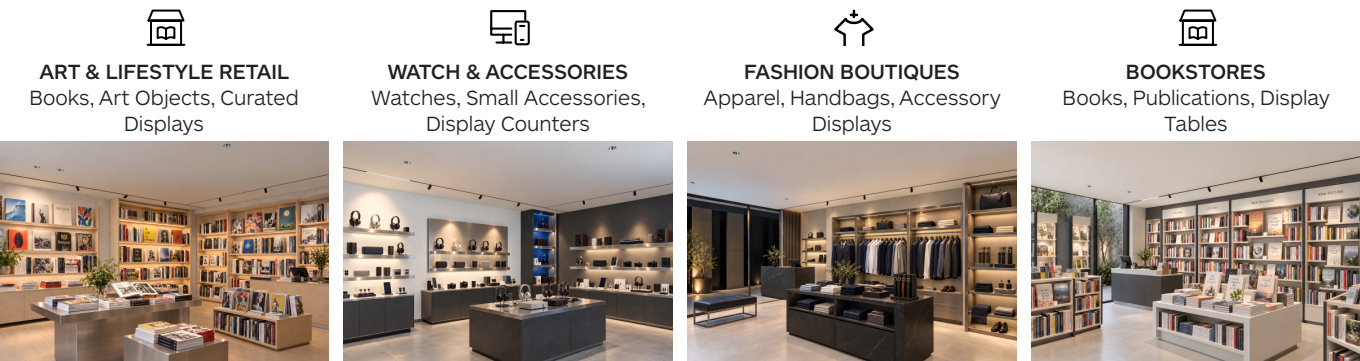

EMMA MAGNETIC LOW-GLARE MAGNETIC TRACK LIGHT

EMMA MAGNETIC is designed for spaces where visual comfort matters as much as the light itself.

Its deeply controlled optical design helps shield the light source from direct view, reducing glare while maintaining clean, precise illumination for retail, hospitality, office and residential interiors.

Available in three sizes with fixed and adjustable options, EMMA brings comfortable accent lighting into a compact magnetic system without adding visual clutter to the ceiling.




SEE THE LIGHT. NOT
THE GLARE.
Deep Optical Control

COMFORT FIRST
Soft Visual Experience

THREE SIZES. ONE
QUIET LOOK.
Ø45 / Ø62 / Ø73


FIXED OR
ADJUSTABLE
14°–56° Beam
Options

EMMA LOW VOLTAGE TRACK LIGHT

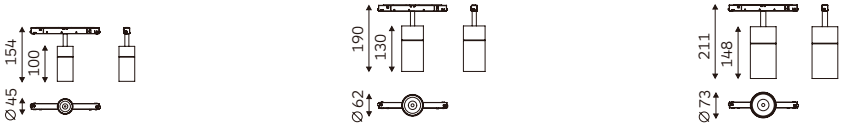


Model	62.04512	62.06217	62.07312
Dimensions	Ø45*100mm	Ø62*130mm	Ø73*148mm
Power	11W 36V 250mA	14W 36V 350mA	24W 36V 600mA
Luminous flux	3000K 935lm	3000K 1627lm	3000K 2963lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V	DC48V
Beam Angle	19°/29°/44°/56°	18°/27°/38°/54°	14°/28°/40°/50°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Reading	Retail / Hospitality	Showroom / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

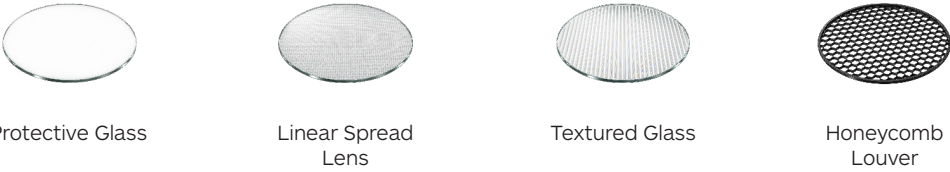

APPLICATIONS
Comfortable accent lighting for retail, display and reading environments where visual comfort matters.

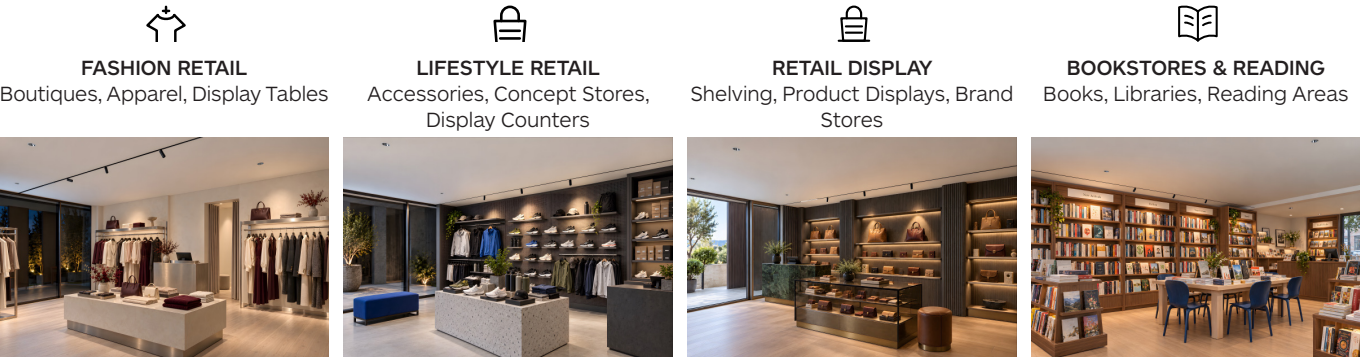

FRAMING

MAGNETIC FRAMING SPOTLIGHT

FRAMING is a precision magnetic spotlight designed for museums, galleries and exhibition spaces where accurate beam control and precise aiming are essential.

Its framing optical system shapes light around artworks and display objects, helping reduce spill light and keep surrounding surfaces visually clean.

With 90° tilt and 350° rotation, the luminaire can be precisely positioned for changing exhibitions, artworks and focal displays.



FRAMING

MAGNETIC FRAMING SPOTLIGHT

FRAMING is a precision magnetic spotlight designed for museums, galleries and exhibition spaces where accurate beam control and precise aiming are essential. Its framing optical system shapes light around artworks and display objects, helping reduce spill light and keep surrounding surfaces visually clean. With 90° tilt and 350° rotation, the luminaire can be precisely positioned for changing exhibitions, artworks and focal displays.



PRECISION FRAMING
Clean Light Around
the Target

PRECISE AIMING
90° Tilt · 350° Rotation

CONTROLLED LIGHT
Reduced Spill Beyond
the Display

MAGNETIC
FLEXIBILITY
Easy Positioning for
Changing Exhibitions

FRAMING

MAGNETIC FRAMING SPOTLIGHT



Model	62.02812	62.03811
Dimensions	Ø28*122mm	Ø38*135mm
Power	6W 36V 150mA	8W 36V 200mA
Luminous flux	3000K 140lm	3000K 267lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V
Beam Angle	16°-33°	21°-31°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20
Best for	Museum / Gallery	Museum / Gallery

OPTICAL ACCESSORIES

Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread
Lens



Textured Glass



Honeycomb
Louver

APPLICATIONS

Precision framing light for museums, galleries and exhibition spaces where accurate aiming and controlled illumination are required.



MUSEUMS & GALLERIES
Artworks, Paintings, Permanent
Collections



EXHIBITION HALLS
Temporary Exhibitions, Feature
Displays



ART & OBJECT DISPLAY
Sculptures, Objects, Feature
Pieces



SHOWCASES & COLLECTIONS
Jewellery, Artifacts, Display Cases



SPECTRUM E

COMPACT MAGNETIC SPOTLIGHT

SPECTRUM E brings practical accent lighting into a compact low-voltage magnetic system.

Available in multiple body sizes, it adapts easily to different spaces and lighting requirements — from subtle highlights to stronger accent illumination.

With flexible positioning and a consistent design language, SPECTRUM E offers a practical solution for retail, residential and hospitality projects.




- MULTIPLE SIZES. ONE FAMILY.
Scalable Light Output
- MOVE THE LIGHT. NOT THE CEILING.
Flexible Magnetic Positioning
- PRECISE ACCENT LIGHTING
Multiple Beam Angles
- COMPACT FORM. BETTER VALUE.
Practical Low-Voltage Solution



SPECTRUM E

LOW VOLTAGE TRACK LIGHT

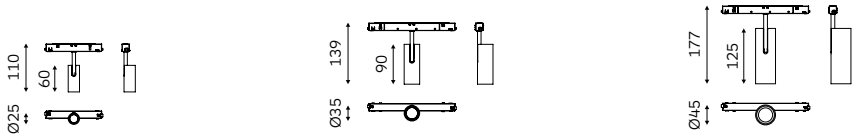

Model	62.02516	62.03520	62.04540
Dimensions	Ø25*60mm	Ø35*90mm	Ø45*125mm
Power	4W 36V 80mA	9W 36V 200mA	15W 36V 350mA
Luminous flux	3000K 197lm	3000K 612lm	3000K 1155lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V	DC48V
Beam Angle	17°/26°/31°/53°	16°/23°/38°/49°	19°/24°/39°/56°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Residential / Hospitality	Residential / Hospitality	Residential / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Flexible accent lighting for retail, residential and hospitality spaces where compact scale and precise aiming matter.

RESIDENTIAL DINING
Dining Rooms, Open-Plan Living Areas

DINING & ENTERTAINMENT
Dining Rooms, Entertainment Spaces

HOSPITALITY SUITES
Guest Rooms, Hotel Suites

LIVING AREAS
Living Rooms, Lounges, Private Residences

SPECTRUM E

COMPACT MAGNETIC SPOTLIGHT

SPECTRUM E brings practical accent lighting into a compact low-voltage magnetic system.

Available in multiple body sizes, it adapts easily to different spaces and lighting requirements — from subtle highlights to stronger accent illumination.

With flexible positioning and a consistent design language, SPECTRUM E offers a practical solution for retail, residential and hospitality projects.



ONE FAMILY. FOUR SCALES.
Ø25 / Ø35 / Ø45 / Ø55 / Ø65


MOVE THE LIGHT. NOT THE CEILING.
Flexible Magnetic Positioning

FIXED OR ADJUSTABLE
Two Lighting Approaches

SMALLER FORM. MORE FREEDOM.
Compact Low-Voltage Design


SPECTRUM E

LOW VOLTAGE TRACK LIGHT

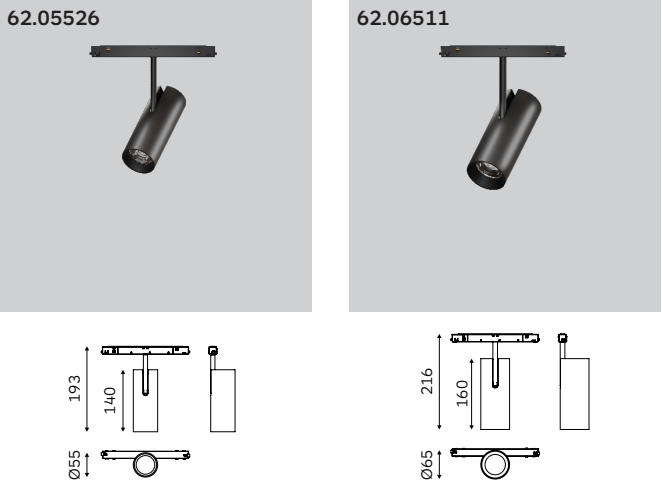


Model	62.05526	62.06511
Dimensions	Ø55*140mm	Ø65*160mm
Power	20W 36V 500mA	25W 36V 600mA
Luminous flux	3000K 2073lm	3000K 2675lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Input	DC48V	DC48V
Beam Angle	21°/26°/35°/53°	18°/25°/34°/56°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20
Best for	Display / Retail	Retail / Residential

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

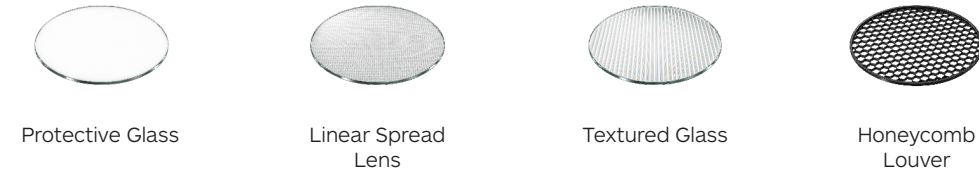

APPLICATIONS
Flexible accent lighting for residential, showroom and display spaces where stronger output and precise aiming are required.

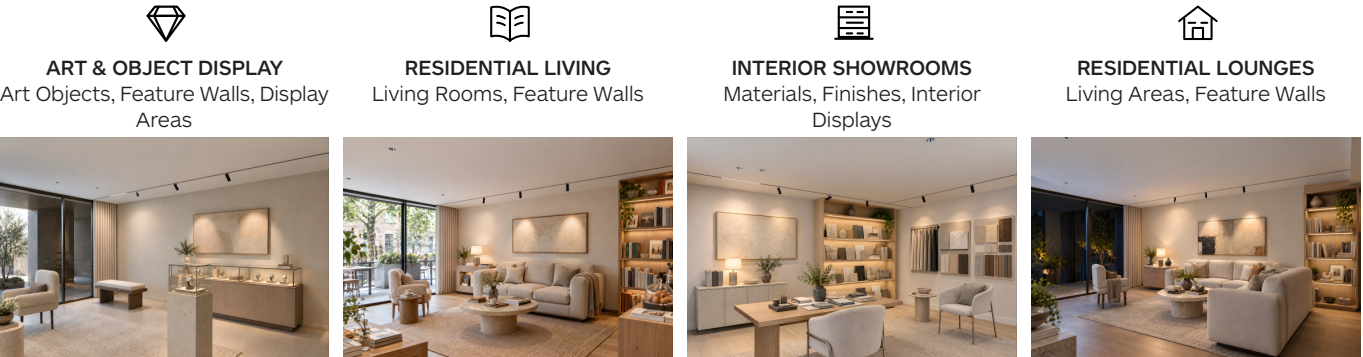

MAGENTRA LINEAR DIFFUSED LIGHT

SOFT. UNIFORM. CONTINUOUS.


Diffused light for comfortable ambient illumination.



61.02356



61.02357

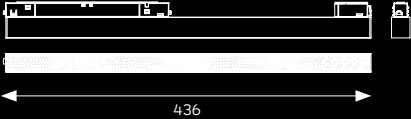

61.02358



MAGENTRA LINEAR DIFFUSED LIGHT

LOW-VOLTAGE MAGNETIC LIGHTING

Soft, uniform linear illumination designed for comfortable ambient lighting within the magnetic track system.

Available in multiple lengths for flexible layouts and a clean, continuous lighting effect.



UNIFORM DIFFUSED LIGHT
Soft, even illumination with reduced visual contrast.

MULTIPLE LENGTHS
220 / 436 / 652 mm


MAGNETIC INSTALLATION
Quick positioning and clean integration within the 48V track system.

CONTINUOUS LIGHTING EFFECT
Creates a clean, consistent visual rhythm along the track.



MAGENTRA LINEAR DIFFUSED

LOW VOLTAGE TRACK LIGHT

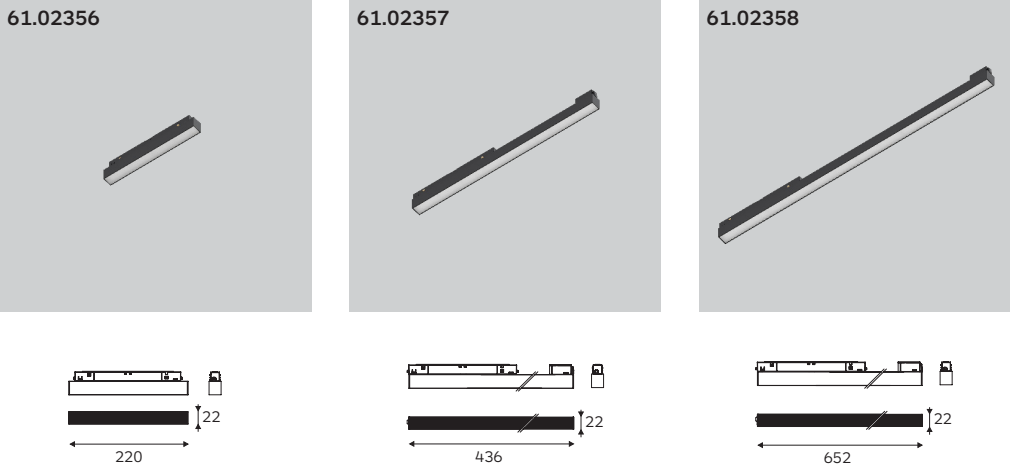

Model	61.02356	61.02357	61.02358
Dimensions	220*22mm	436*22mm	652*22mm
Power	10W 36V 250mA	20W 36V 500mA	27W 36V 700mA
Luminous flux	3000K 717lm	3000K 1537lm	3000K 2195lm
Adjustability	--	--	--
Input	DC48V	DC48V	DC48V
Beam Angle	90°	90°	90°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Hospitality	Retail / Hospitality	Retail / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Soft, uniform lighting for residential, hospitality and lifestyle interiors.

RESIDENTIAL DINING
Dining Rooms, Living Areas

LIFESTYLE INTERIORS
Living Spaces, Reading Areas

HOSPITALITY SUITES
Guest Rooms, Lounge Areas

RESIDENTIAL LIVING
Living Rooms, Feature Areas

MAGENTRA LINEAR ACCENT LIGHT

FOCUS, EXTENDED IN LINE.


A continuous row of precise light points brings rhythm and definition to displays.



ROUND ANTI-GLARE + HONEYCOMB

ROUND ANTI-GLARE

SQUARE ANTI-GLARE

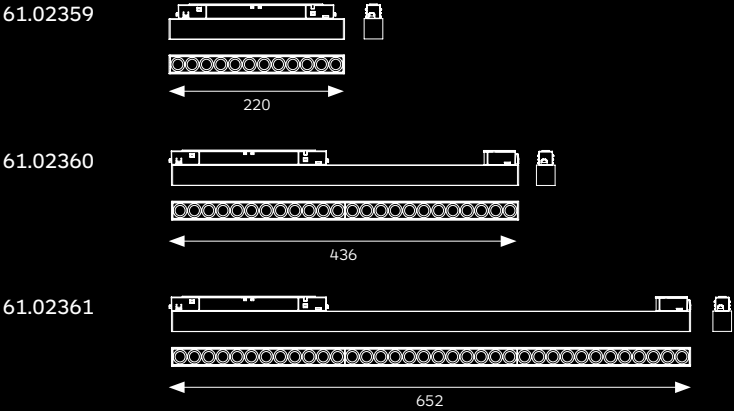

Three optical options: Round anti-glare with honeycomb, Round anti-glare, Square anti-glare

MAGENTRA LINEAR ACCENT LIGHT

LOW-VOLTAGE MAGNETIC LIGHTING

Linear accent lighting designed with multiple optical cells for precise, controlled illumination.

Available in three lengths and multiple anti-glare optical options for flexible retail and display applications.



PRECISION OPTICS
Focused light for
accent and display
illumination.


MULTIPLE LENGTHS
220 / 436 / 652 mm

ANTI-GLARE OPTIONS
Round, honeycomb
and square optical
configurations.

**MAGNETIC
INSTALLATION**
Quick positioning
within the 48V track
system.

MAGENTRA LINEAR ACCENT LIGHT

LOW-VOLTAGE MAGNETIC LIGHTING

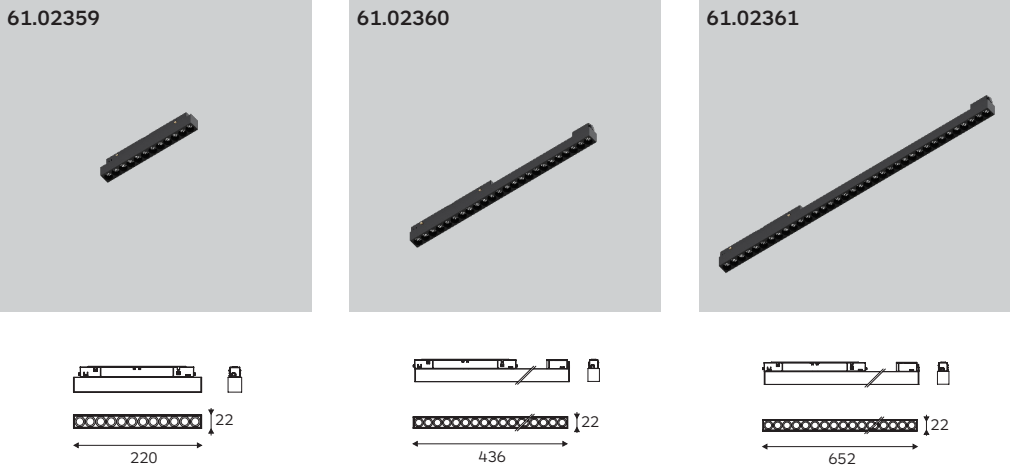

Model	61.02359	61.02360	61.02361
Dimensions	220*22mm	436*22mm	652*22mm
Power	10W 36V 250mA	20W 36V 500mA	27W 36V 700mA
Luminous flux	3000K 1018lm	3000K 2041lm	3000K 2691lm
Adjustability	--	--	--
Input	DC48V	DC48V	DC48V
Beam Angle	21°/29°/41°	21°/29°/41°	21°/29°/41°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Showroom	Retail / Showroom	Retail / Showroom

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Precise linear accent lighting for objects, displays and feature areas.



ART & OBJECT DISPLAY
Sculptures, Shelves, Feature Walls





DINING & LIVING
Dining Areas, Art Walls, Shelving





RESIDENTIAL LIVING
Living Areas, Bookshelves, Displays







PRIVATE GALLERY
Artworks, Collectibles, Feature Displays



MAGENTRA LINEAR WALL WASHER LIGHT, DRAWN ACROSS THE WALL.

A quiet layer of light that extends beyond the luminaire, bringing depth and rhythm to vertical surfaces.

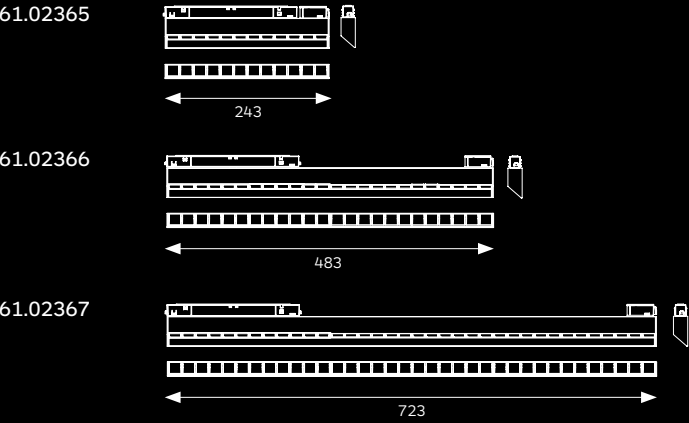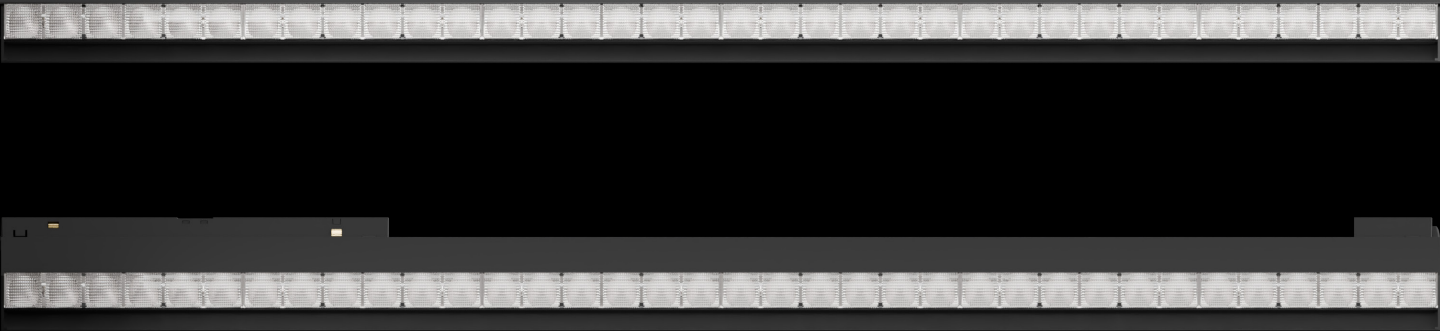

MAGENTRA LINEAR WALL WASHER

LOW-VOLTAGE MAGNETIC LIGHTING

Linear wall-wash lighting with asymmetric optics for smooth and uniform vertical illumination.

Available in three lengths for flexible wall coverage across retail, gallery and hospitality interiors.



ASYMMETRIC WALL WASH
Directs light efficiently onto vertical surfaces.


EVEN VERTICAL ILLUMINATION
Smooth coverage with reduced dark gaps.

THREE LENGTHS
243 / 483 / 723 mm

MAGNETIC INSTALLATION
Quick positioning within the 48V track system

MAGENTRA LINEAR WALL WASHER


LOW-VOLTAGE MAGNETIC LIGHTING

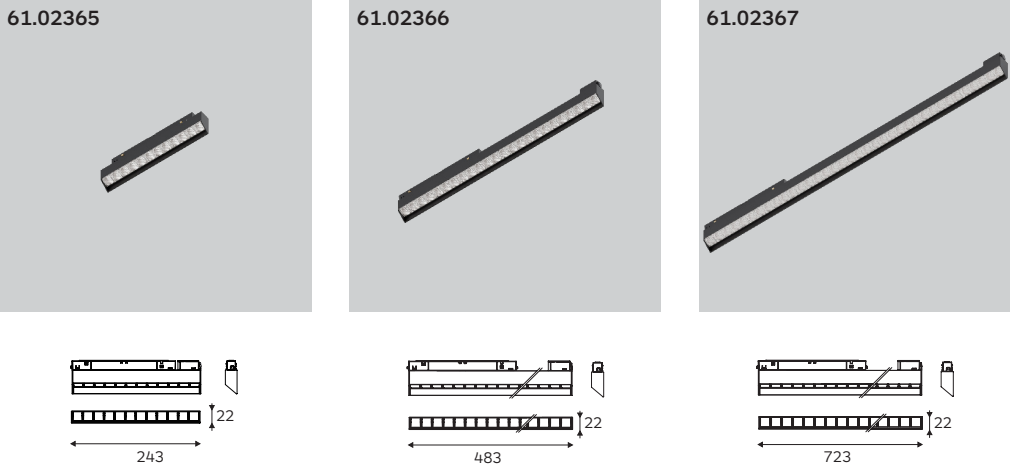

Model	61.02365	61.02366	61.02367
Dimensions	243*22mm	483*22mm	723*22mm
Power	10W 36V 250mA	20W 36V 500mA	27W 36V 700mA
Luminous flux	3000K 1133lm	3000K 2260lm	3000K 3082lm
Adjustability	--	--	--
Input	DC48V	DC48V	DC48V
Beam Angle	ww Tilted 5° Beam 40°	ww Tilted 5° Beam 40°	ww Tilted 5° Beam 40°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
Dimming method	DALI / 0-10V	DALI / 0-10V	DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Gallery	Retail / Gallery	Retail / Gallery

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Smooth vertical illumination for retail, display and architectural surfaces.

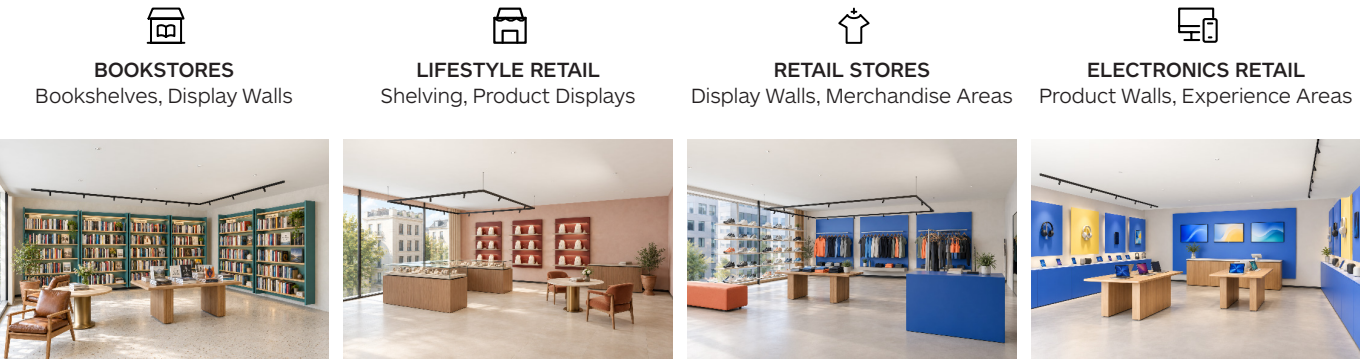


MAGNETIC TRACK SYSTEM

ONE SYSTEM. MULTIPLE INSTALLATIONS.

A flexible low-voltage track platform designed for surface, pendant and recessed installation.

Different track profiles adapt to different ceiling conditions while maintaining one clean architectural language.

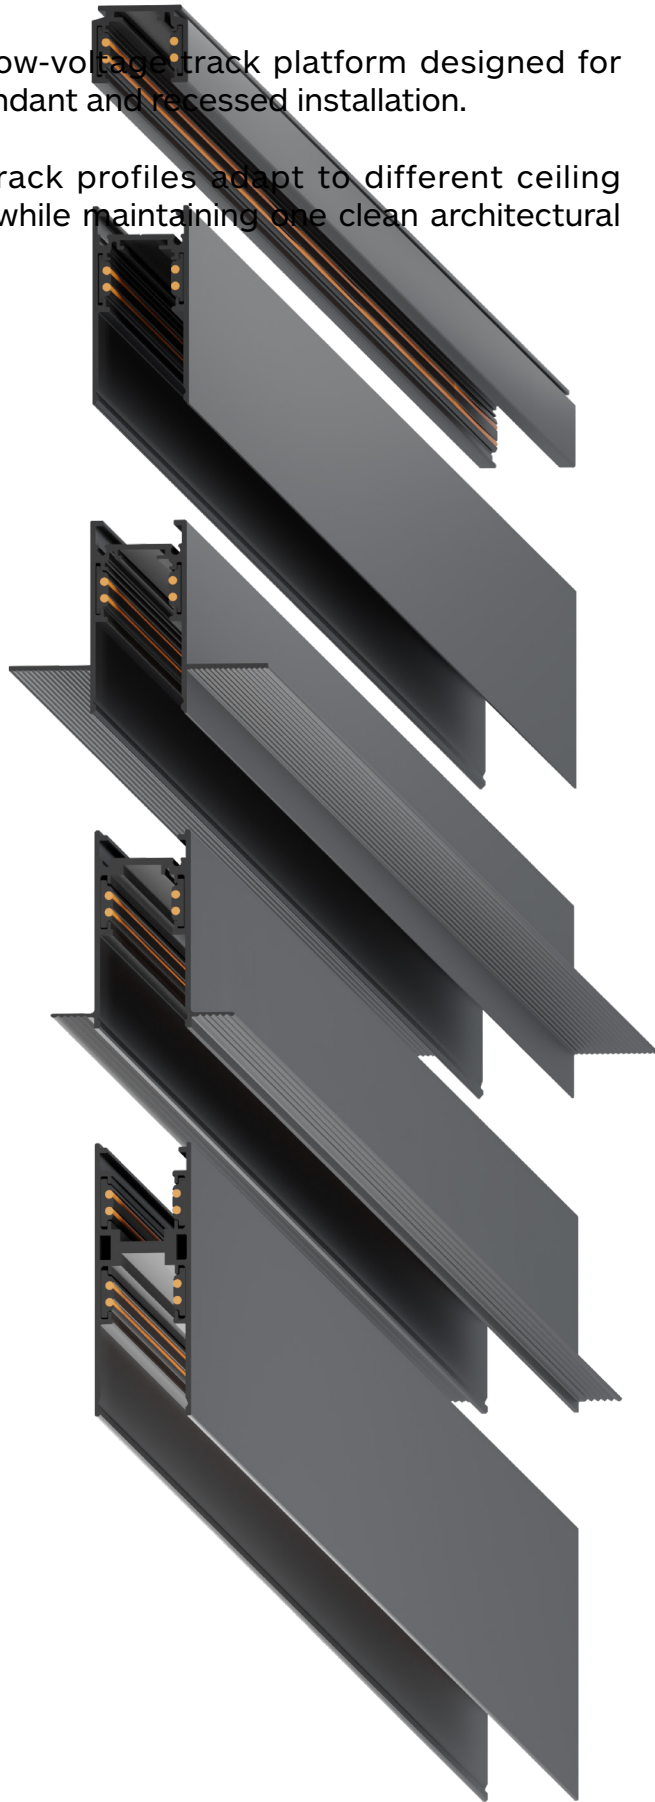


ULTRA-SLIM SURFACE MOUNTED

PENDANT

DOUBLE-LAYER RECESSED


TRIMLESS RECESSED

UP/DOWN PENDANT

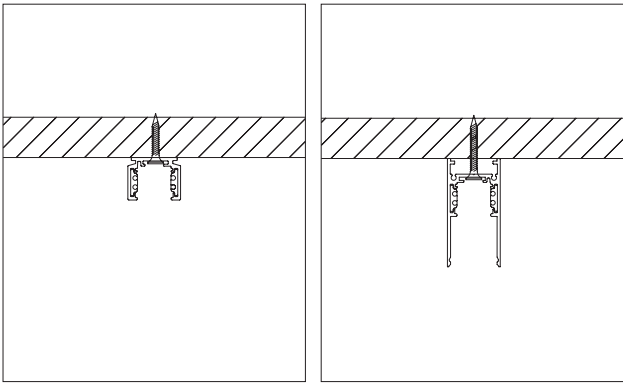


ULTRA-SLIM SURFACE MOUNTED

DEEP SURFACE MOUNTED

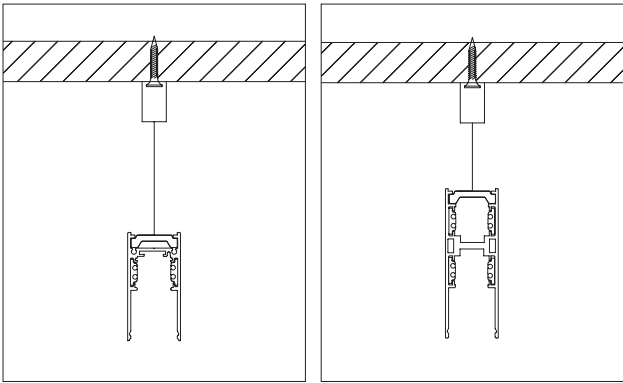

PENDANT

UP/DOWN PENDANT

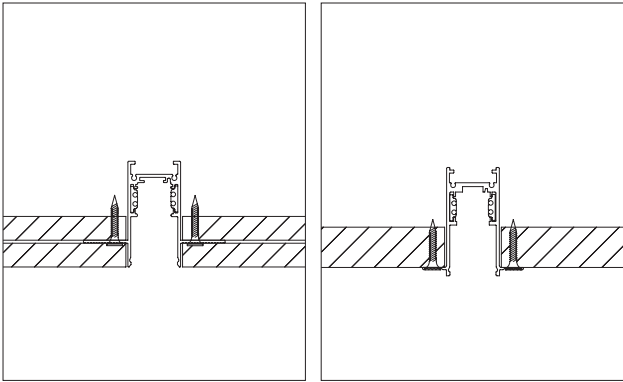


DOUBLE-LAYER RECESSED

TRIMLESS RECESSED


LOW-VOLTAGE MAGNETIC TRACK SYSTEM

TRACKS & ACCESSORIES


A complete track platform with multiple installation profiles and flexible connection accessories.

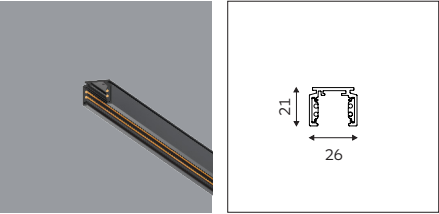


ULTRA-SLIM SURFACE MOUNTED TRACK
1M / 1.5M / 2M / 3M

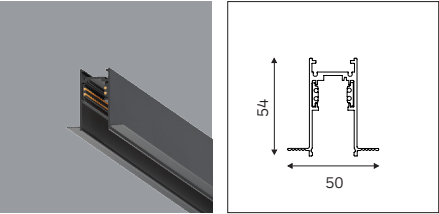


TRIMLESS RECESSED TRACK
1M / 1.5M / 2M / 3M
Cut-out: 28 mm

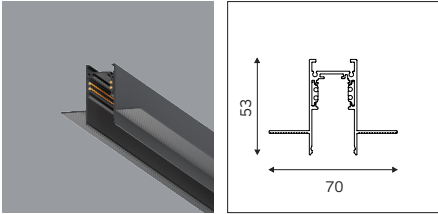

DOUBLE-LAYER RECESSED TRACK
For Double-Layer Ceilings
1M / 1.5M / 2M / 3M
Cut-out: 28 mm

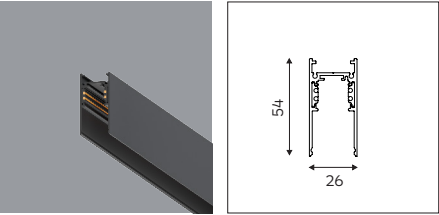


PENDANT TRACK
1M / 1.5M / 2M / 3M

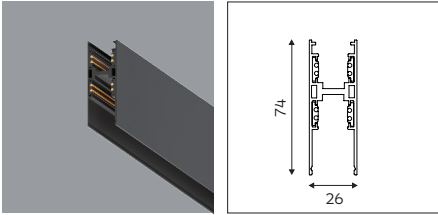


UP/DOWN PENDANT TRACK
1M / 1.5M / 2M / 3M

CONNECTION ACCESSORIES


Flexible components for continuous, corner and branched track layouts.

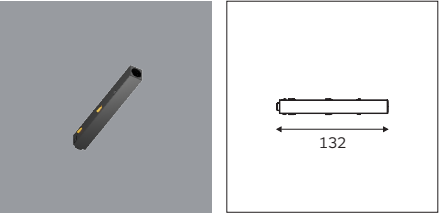


LIVE-END CONNECTOR

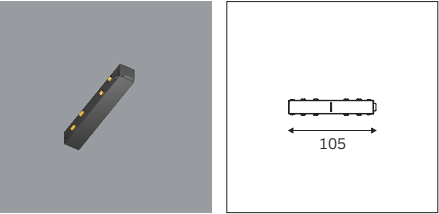


STRAIGHT CONNECTOR

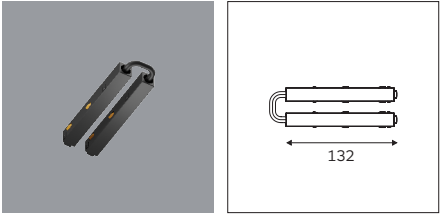

FLEXIBLE CONNECTOR

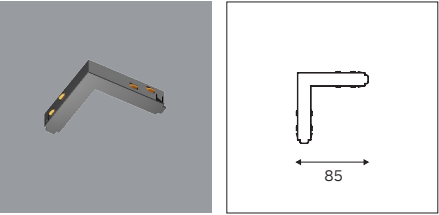

L CONNECTOR

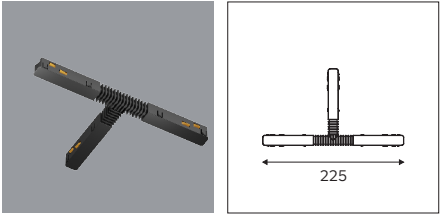

T CONNECTOR