


SURFACE-MOUNTED LIGHTING

ARCHITECTURAL FORM.

FLEXIBLE LIGHT.

Fixed, adjustable and specialty solutions designed for a wide range of interior applications.

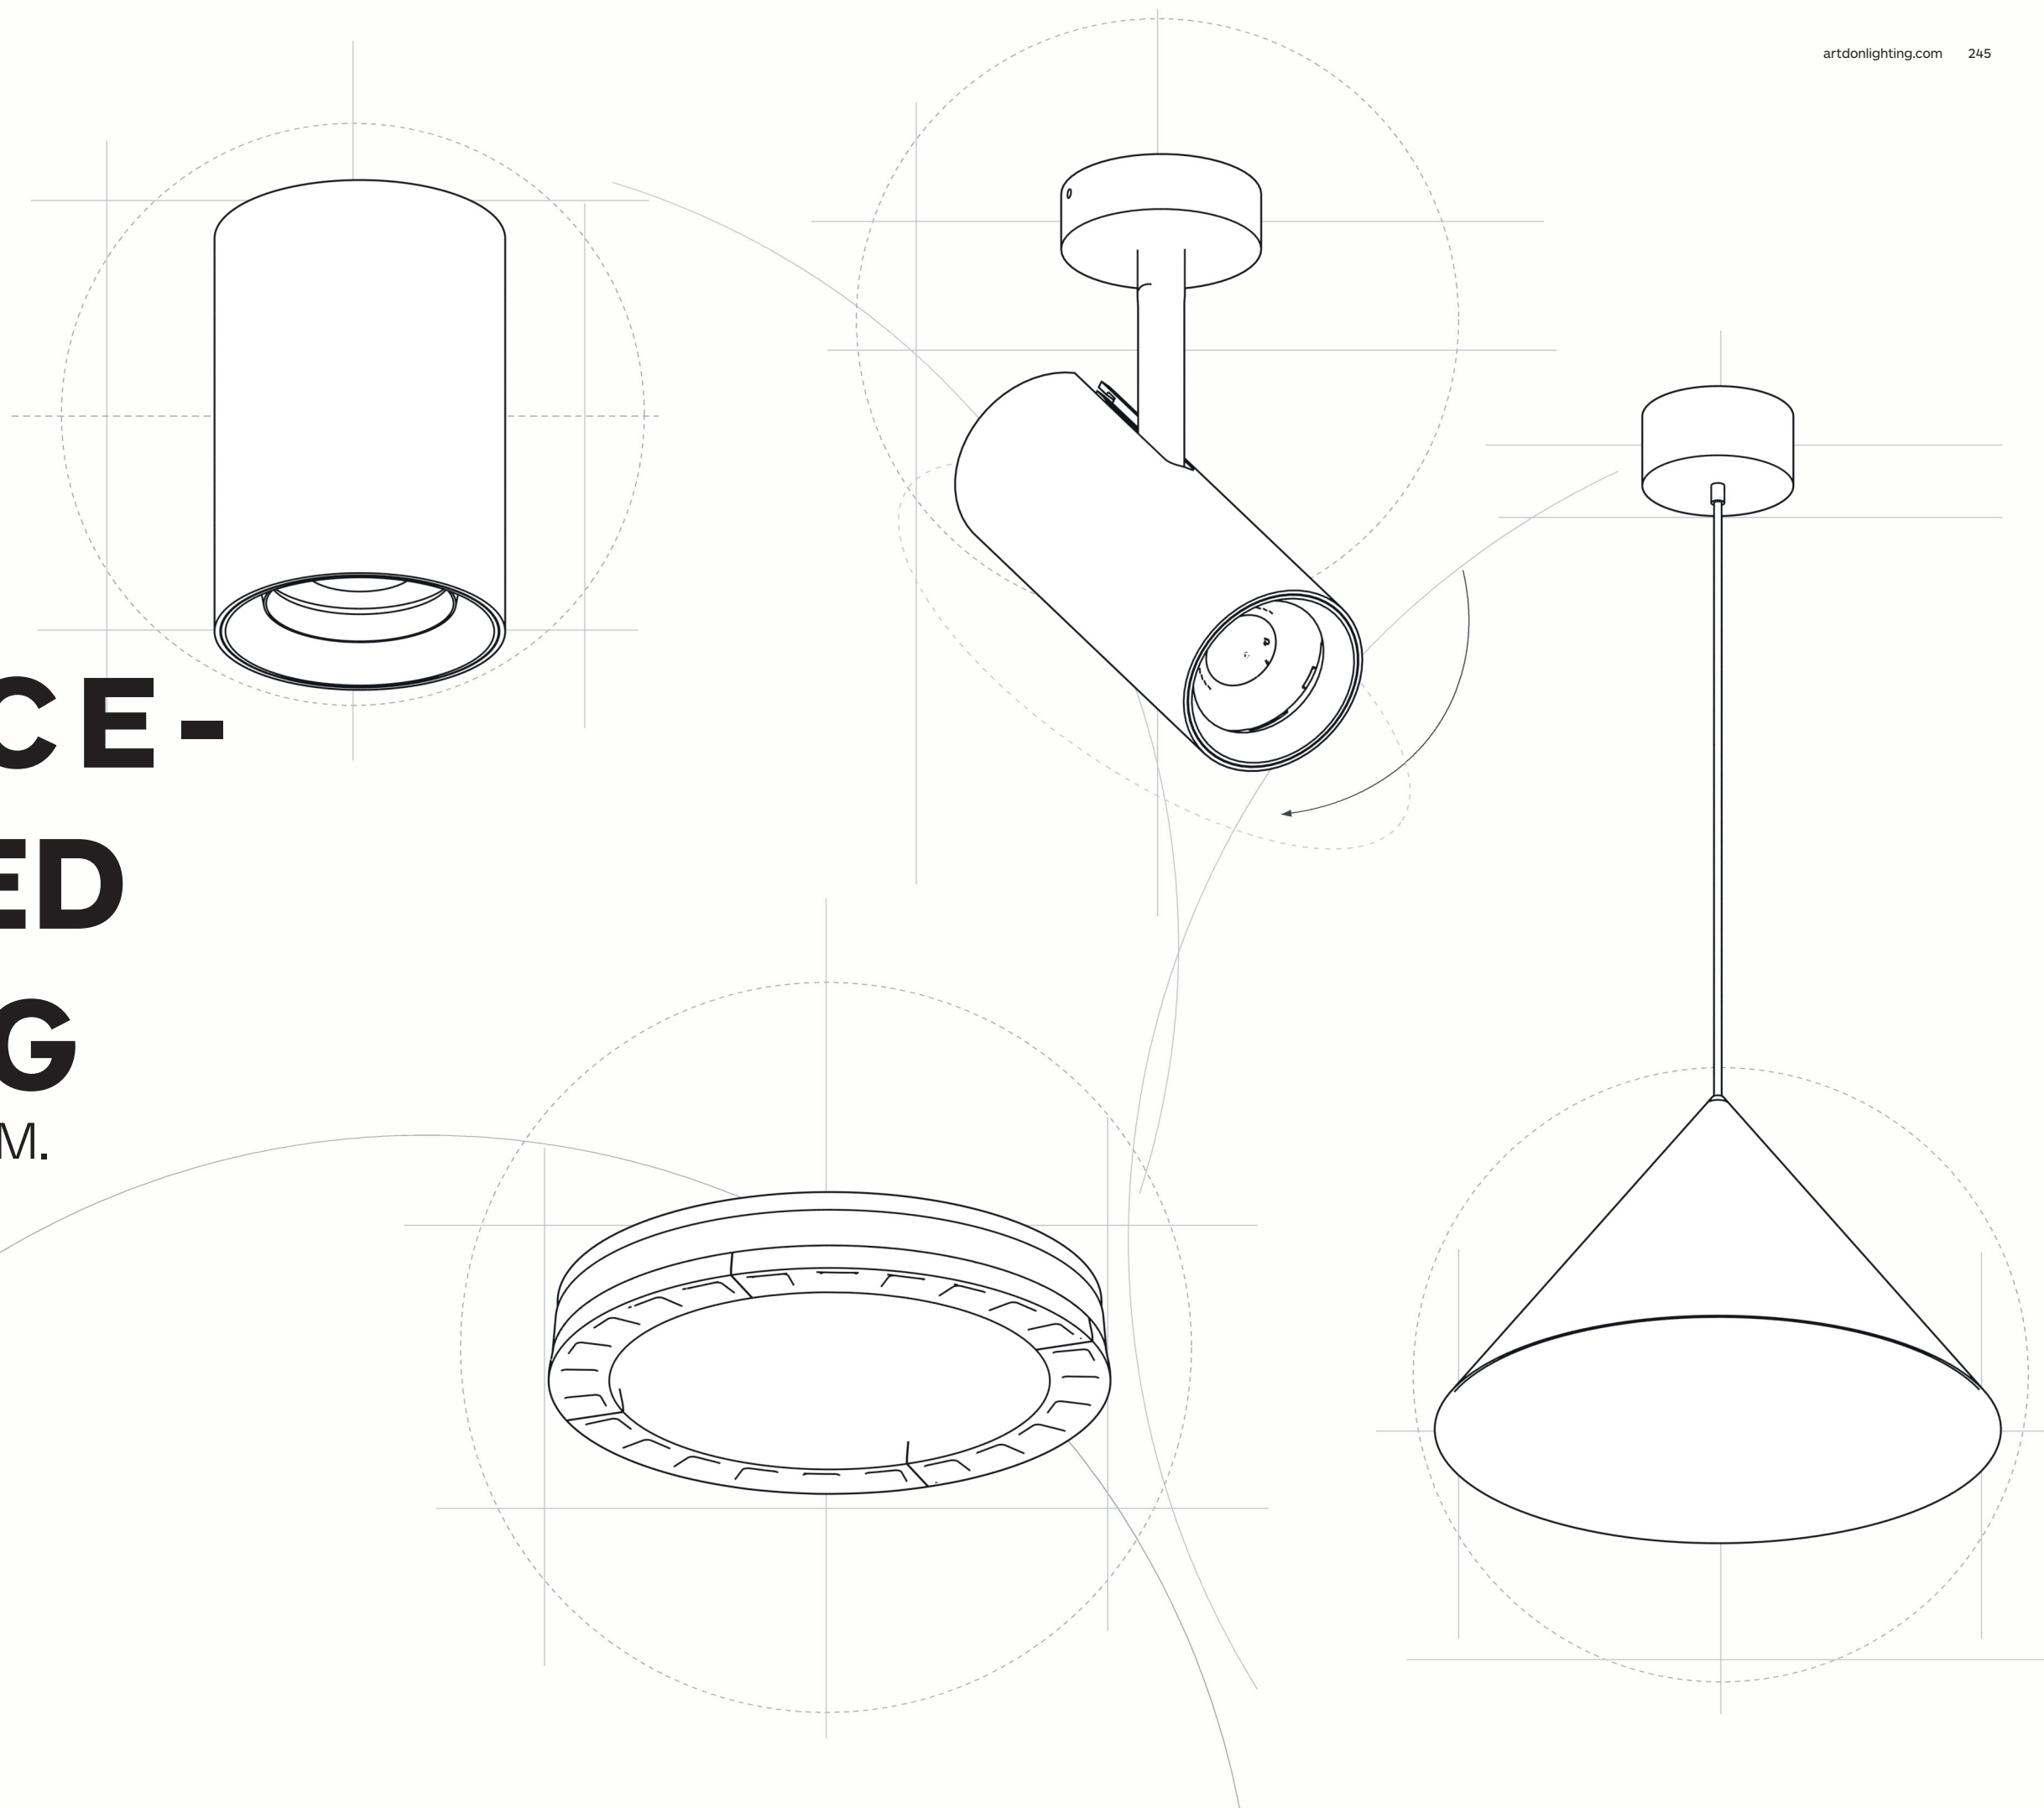

UTH

ULTRA-LOW PROFILE SURFACE MOUNTED LIGHT

Minimal height. Clean ceiling appearance.

UTH offers a clean surface-mounted solution for spaces where recessed installation is not possible or preferred.

Its ultra-low profile minimizes visual presence on the ceiling while delivering comfortable, controlled downlighting.



ULTRA-LOW PROFILE
55 / 66 / 72 mm Height


CLEAN CEILING LOOK
Minimal Visual Presence

THREE SIZES
Ø65 / Ø80 / Ø95

MULTIPLE BEAM
OPTIONS
14°–60°

UTH

SURFACE MOUNTED LIGHT



Model	91.06511	91.08011	91.09511
Dimensions	Ø65*55mm	Ø80*66mm	Ø95*72mm
Power	6W 36V 150mA	10W 36V 250mA	15W 36V 350mA
Luminous flux	3000K 562lm	3000K 1226lm	3000K 1694lm
Adjustability	Tilt --° Rotation --°	Tilt --° Rotation --°	Tilt --° Rotation --°
Beam Angle	21°/27°/35°/60°	17°/25°/34°/60°	14°/25°/35°/58°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Villa / Hotel	Retail / Villa / Hotel	Retail / Villa / Hotel

OPTICAL ACCESSORIES

Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread
Lens



Textured Glass



Honeycomb
Louver

APPLICATIONS

Clean surface-mounted downlighting for retail, hospitality and refined commercial interiors.



CAFÉS & DINING
Cafés, Dining Areas, Lounges



FASHION RETAIL
Apparel, Wardrobes, Boutique
Displays



PREMIUM RETAIL
Boutiques, Fashion Displays,
Showrooms



BEAUTY & COSMETICS
Cosmetics, Skincare, Product
Displays



ADJ E ADJUSTABLE SURFACE-MOUNTED LIGHT


A more cost-effective adjustable solution with higher output.

ADJ E is the second surface-mounted adjustable version, created for projects that need the same lighting function with better value.

Its enlarged optical aperture and higher lumen output provide stronger, more efficient accent lighting with flexible aiming.


- COST-EFFECTIVE
VERSION
Better Value for
Projects
- ADJUSTABLE AIMING
Flexible Tilt Adjustment
- LARGER OPTICAL
DIAMETER
Improved Light
Control
- HIGHER LUMEN
OUTPUT
Stronger Illumination

ADJ E SURFACE MOUNTED LIGHT

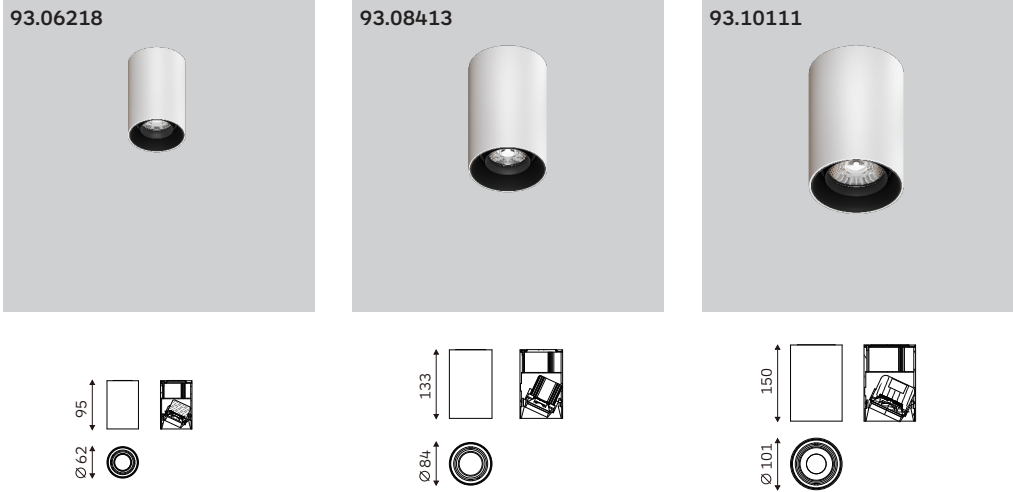


Model	93.06218	93.08413	93.10111
Dimensions	Ø62*95mm	Ø84*133mm	Ø101*150mm
Power	10W 36V 250mA	15W 36V 350mA	20W 36V 500mA
Luminous flux	3000K 876lm	3000K 1304lm	3000K 2471lm
Adjustability	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	21°/34°/59°	15°/23°/31°/59°	15°/24°/35°/60°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Hospitality	Retail / Hospitality	Retail / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

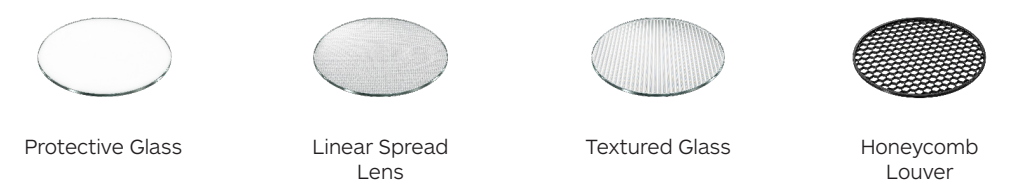

APPLICATIONS
Adjustable surface-mounted lighting for retail, hospitality, residential and commercial interiors.

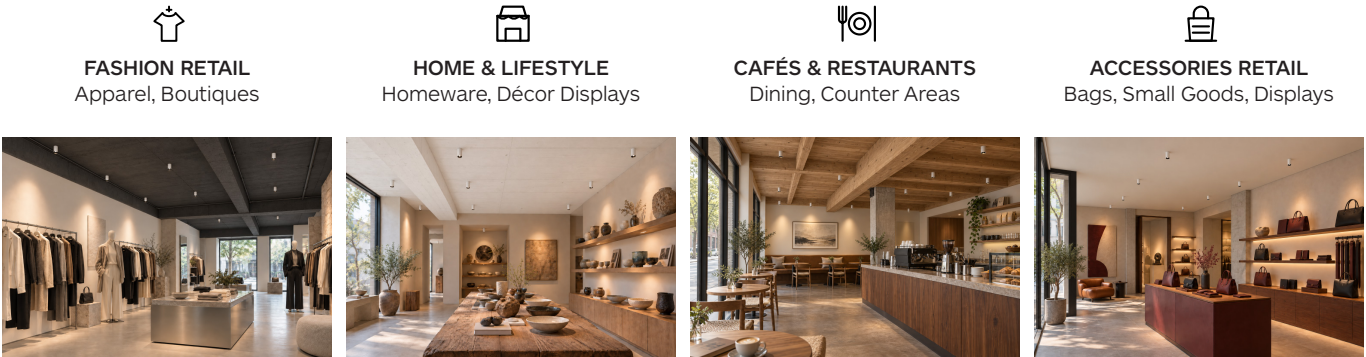

WASHO

SURFACE WALL WASHER

Uniform wall washing without recessed installation.

WASHO brings dedicated asymmetric wall-washing optics into a clean surface-mounted form.

It delivers smooth, uniform vertical illumination for walls, displays and architectural surfaces.



ASYMMETRIC WALL
WASH
Controlled Vertical
Illumination


UNIFORM LIGHT
Smooth Ceiling-to-Floor
Coverage

SURFACE-MOUNTED
No Recessed
Installation Required

THREE SIZES
Ø55 / Ø73 / Ø90

WASHO

SURFACE MOUNTED LIGHT



Model	91.05513	91.07313	91.09015
Dimensions	Ø55*90mm	Ø73*105mm	Ø90*116mm
Power	9W 36V 200mA	15W 36V 350mA	28W 36V 700mA
Luminous flux	3000K 400lm	3000K 1123lm	3000K 1754lm
Adjustability	Tilt --° Rotation --°	Tilt --° Rotation --°	Tilt --° Rotation --°
Beam Angle	ww Tilted 20° Beam 48°	ww Tilted 20° Beam 72°	ww Tilted 22° Beam 52°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Gallery / Display	Retail / Gallery	Showroom / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Uniform wall washing for galleries, retail displays and architectural feature walls.



ART GALLERIES
Artworks, Exhibitions, Display
Walls



GALLERY & RECEPTION
Feature Walls, Art Displays, Public
Spaces



ART CORRIDORS
Corridors, Art Walls, Transitional
Spaces



FASHION RETAIL
Boutiques, Apparel Displays,
Feature Walls



HALO

ONE LIGHT. TWO MOUNTING OPTIONS.

Same luminaire. Same optical performance.
Available for both track-mounted and surface-mounted installation.



ONE LIGHT. TWO MOUNTS.
Track / Surface-Mounted



CONSISTENT DESIGN
Same Luminaire Language

FLEXIBLE INSTALLATION
For Different Ceiling Conditions

CONTROLLED LIGHT
Comfortable Architectural Illumination

HALO

SURFACE MOUNTED LIGHT



Model	91.09711	91.21811	91.27811
Dimensions	Ø97*44mm	Ø218*44mm	Ø278*44mm
Power	10W 36V 200mA	20W 36V 500mA	30W 36V 700mA
Luminous flux	3000K 660lm	3000K 1822lm	3000K 2342lm
Adjustability	--	--	--
Beam Angle	41°	45°	38°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Commercial / Public	Commercial / Public	Showroom / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Versatile architectural lighting for offices, public spaces and transport environments.



OPEN-PLAN OFFICES
Workspaces, Collaborative Areas



COMMERCIAL LOBBIES
Reception Areas, Public Lounges



TRANSPORT TERMINALS
Airports, Waiting Areas



WORKPLACE LOUNGES
Office Lounges, Shared Spaces



EMMA

SURFACE-MOUNTED SPOTLIGHT

EMMA brings clean, adjustable accent lighting to spaces where recessed installation is not required.


Its compact cylindrical form and flexible aiming make it suitable for retail, galleries, hospitality and residential interiors.



- CLEAN SURFACE
DESIGN
Minimal architectural
form
- FLEXIBLE AIMING
90° Tilt · 350° Rotation
- MULTIPLE SIZES
Ø45 / Ø62 / Ø73 / Ø90
- MULTIPLE BEAM
OPTIONS
19°–56° Beam Range

EMMA

SURFACE MOUNTED LIGHT

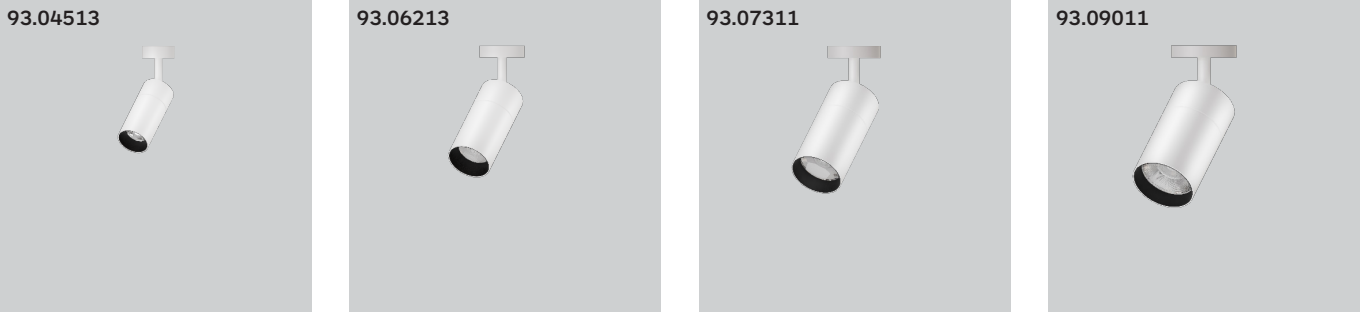

Model	93.04513	93.06213	93.07311	93.09011
Dimensions	Ø45*100mm	Ø62*130mm	Ø73*148mm	Ø90*160mm
Power	11W 36V 250mA	14W 36V 350mA	24W 36V 600mA	36W 36V 900mA
Luminous flux	3000K 935lm	3000K 1627lm	3000K 2963lm	3000K 4509lm
Adjustability	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°	Tilt 90° Rotation 350°
Beam Angle	19°/29°/44°/56°	18°/27°/38°/54°	14°/28°/40°/50°	16°/20°/30°/45°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
UGR	--	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Retail / Display	Retail / Gallery	Hospitality / Retail	Showroom / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread
Lens



Textured Glass



Honeycomb
Louver


APPLICATIONS
Flexible surface-mounted accent lighting for retail, galleries and refined commercial interiors.



ART GALLERIES
Artworks, Exhibitions, Display
Walls



GALLERY CORRIDORS
Art Walls, Corridors, Exhibition
Spaces



LIFESTYLE RETAIL
Homeware, Accessories, Product
Displays



HOME & DECOR RETAIL
Decor, Gifts, Lifestyle Displays

