


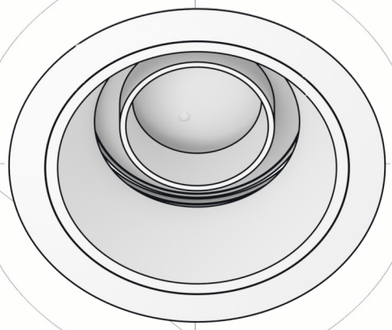


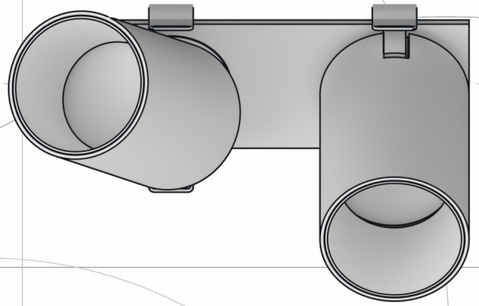

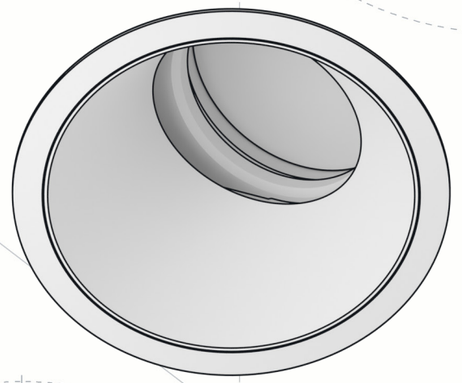

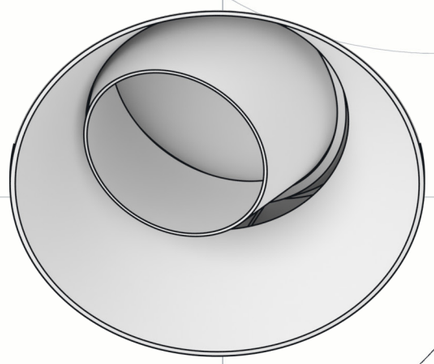

DOWN LIGHTING

CLEAN CEILINGS.
REFINED LIGHT.
Precision, comfort and flexibility integrated into the architecture.


Artdon
Innovation Expertise Solutions

REDLINE
RECESSED DOWNLIGHT

REDLINE is an adjustable recessed downlight family designed for refined architectural interiors.

Deep anti-glare optics, precise 0–40° aiming and flexible installation options combine visual comfort with clean ceiling integration.

REDLINE
RECESSED DOWNLIGHT

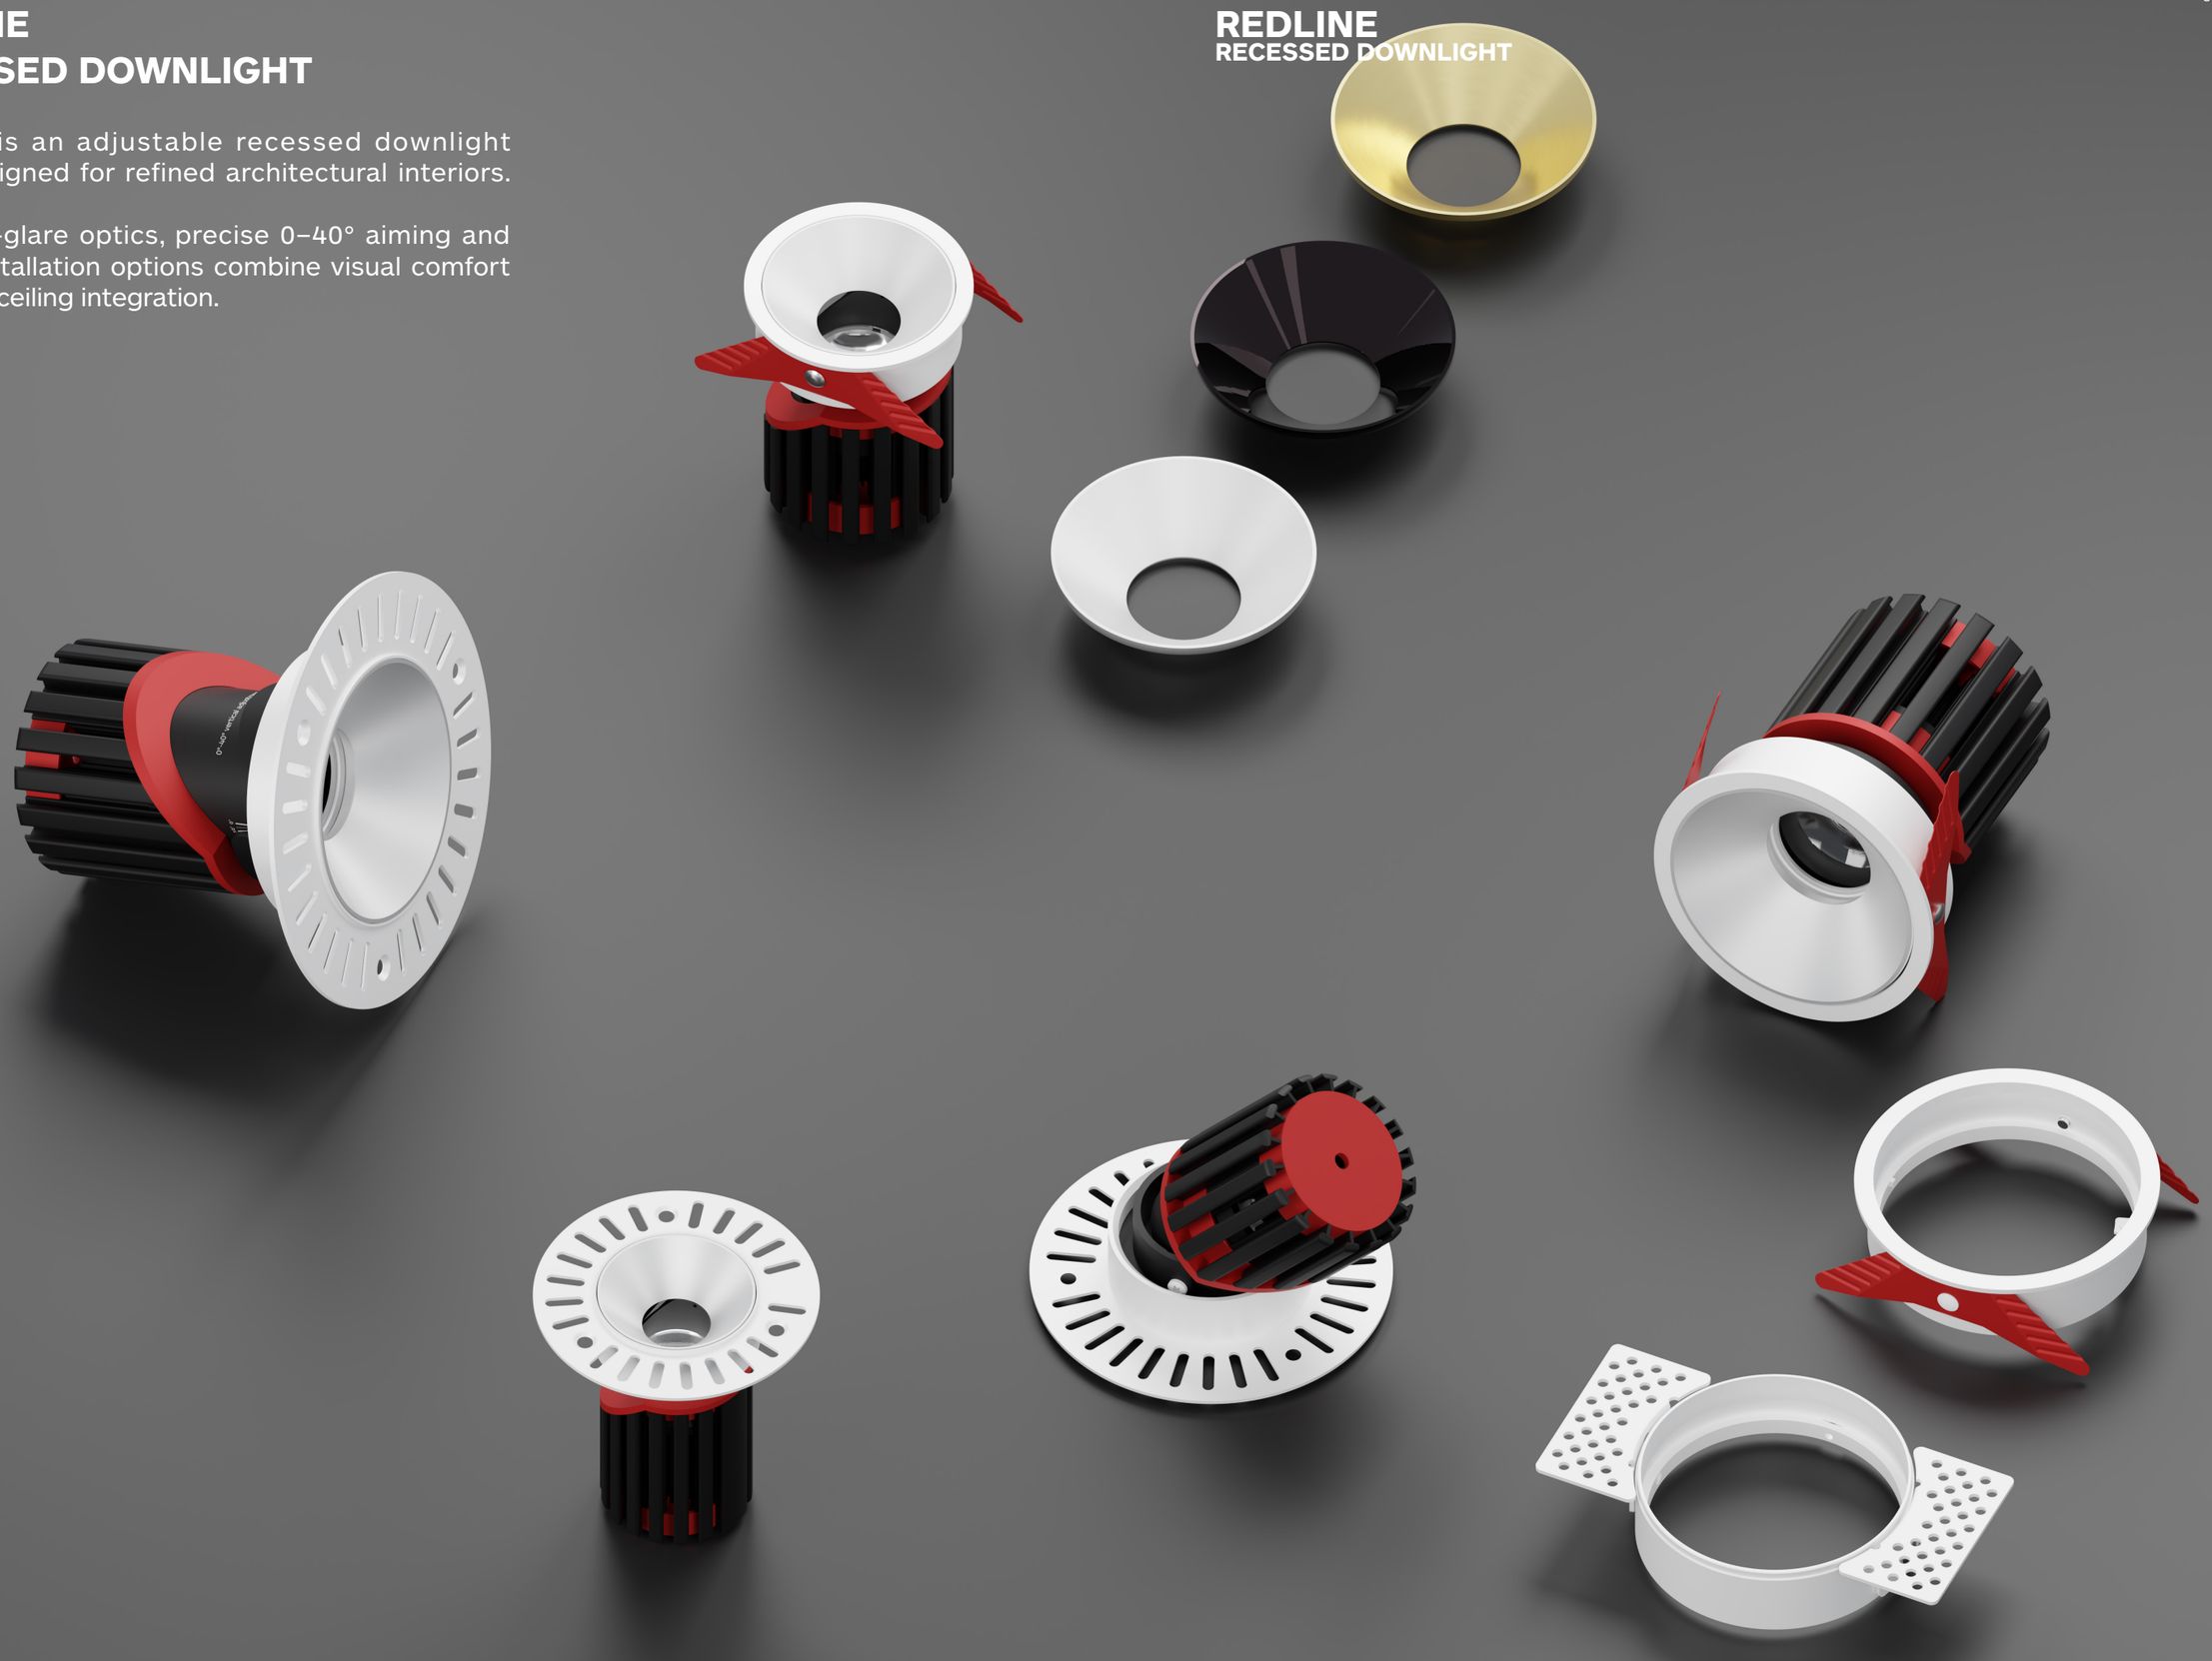

REDLINE


Pure Performance Built In

A refined recessed downlight system engineered for precision, visual comfort and architectural integration.

Precise Optics
Controlled light with visual comfort.

Flexible Installation
Trimmed and trimless options for different ceiling conditions.

Refined Appearance
Only the refined lighting element remains visible.

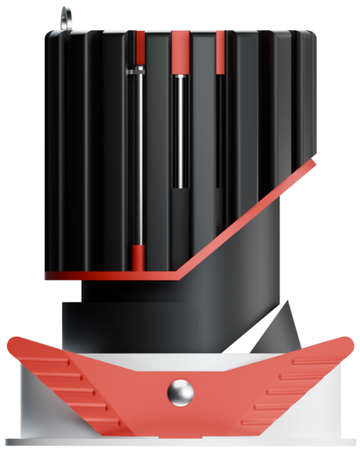

LED Module
Efficient thermal design
0-40° adjustable
Interchangeable optics

Trim Ring
Clean edge
Secure fixing
Minimal visual profile

Installation Module
Trimmed / trimless options
Stable installation
For different ceiling conditions

Reflector
Deep anti-glare design
Multiple finishes
Adaptable to interior concepts

REDLINE
RECESSED DOWNLIGHT




Horizontal Rotation Assist Handle

The built-in assist handle allows the lighting module to be rotated horizontally with ease. Installers can make fine directional adjustments by hand, and the module can also be pulled downward for easier access during aiming, maintenance, or module adjustment.



0-40° Adjustable Aiming / 6-25 mm Ceiling Compatibility

The REDLINE module supports 0-40° adjustable tilt, allowing precise beam control for wall washing, artwork lighting, display illumination, and accent applications. The installation structure is compatible with ceiling thicknesses from 6-25 mm, providing flexible use across different project conditions.

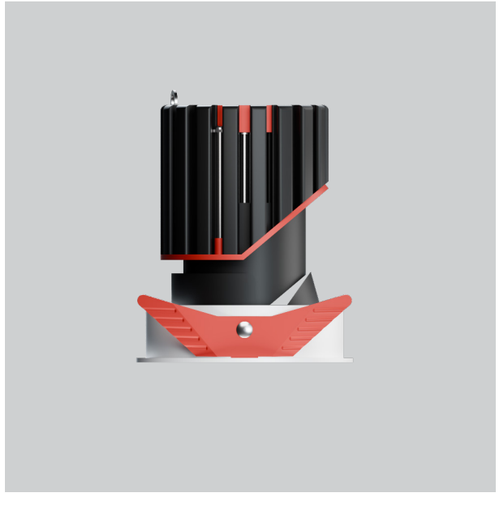

Synchronized Anti-Glare Shield

The black anti-glare shield is designed to move together with the adjustable lighting module. Its elastic linkage allows the shield to follow the module smoothly during angle adjustment, helping maintain glare control and visual comfort at different aiming positions.

REDLINE
RECESSED DOWNLIGHT

REDLINE is an adjustable recessed downlight family designed for refined architectural interiors.

Deep anti-glare optics, precise 0–40° aiming and flexible installation options combine visual comfort with clean ceiling integration.

PRECISION OPTICS
Multiple Beam Angles
Precise Light Control

VISUAL COMFORT
Deep Anti-Glare
Design
Reduced Visual Glare

PRECISE AIMING
0–40° Adjustable
350° Rotation


FLEXIBLE
INSTALLATION
Trimmed & Trimless
Multiple Sizes

Artdon
Innovation Expertise Solutions

REDLINE
RECESSED DOWNLIGHT


52.05549






52.07540






57.05526





57.07511





Model	52.05549	52.07540	57.05526	57.07511
Cut-Out Size	Ø55mm	Ø75mm	Ø55mm	Ø75mm
Dimensions	Ø60*87mm	Ø80*98mm	Ø54*87mm	Ø74*98mm
Power	10W 36V 250mA	14W 36V 350mA	10W 36V 250mA	14W 36V 350mA
Luminous flux	3000K 880lm	3000K 1108lm	3000K 880lm	3000K 1108lm
Adjustability	Tilt 40° Rotation 350°	Tilt 40° Rotation 350°	Tilt 40° Rotation 350°	Tilt 40° Rotation 350°
Beam Angle	23°/31°/42°/54°	18°/25°/33°/50°	23°/31°/42°/54°	18°/25°/33°/50°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Retail / Villa / Hotel	Retail / Villa / Hotel	Retail / Villa / Hotel	Retail / Villa / Hotel

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Precision adjustable lighting for retail, hospitality and gallery interiors.

PREMIUM SHOWROOMS
Automotive, Retail, Experience Centers




LUXURY RESIDENTIAL
Villas, Private Homes, Penthouses



PRIVATE GALLERIES
Stairways, Corridors, Art Walls



HOSPITALITY
Hotels, Resorts, Lounges



VERO
CENTERED-APERTURE MODULAR RECESSED DOWNLIGHT

VERO is designed for premium interiors that require directional lighting without disturbing the visual balance of the ceiling.

Its movable internal module allows the light to be adjusted while the aperture remains visually centered, creating a cleaner and more refined recessed appearance than conventional adjustable downlights.

Combined with front maintenance, magnetic trim and an integrated module design, VERO brings precise lighting control together with simplified service and a compact architectural presence.

ADJUST THE LIGHT. KEEP THE APERTURE CENTERED.
Movable Internal Module


SMALL APERTURE, CLEANER CEILING
Minimal Visual Presence

DESIGNED FOR EASY SERVICE
Front Maintenance

COMPACT SYSTEM FOR PREMIUM SPACES
Integrated Module Structure


VERO
RECESSED DOWNLIGHT


52.10811



57.10811







Model	**52.10811**	**57.10811**
Cut-Out Size	Ø108mm	Ø108mm
Dimensions	Ø118*70mm	Ø105*70mm
Power	8W 36V 180mA	8W 36V 180mA
Luminous flux	3000K 446lm	3000K 446lm
Adjustability	Tilt 30°	Tilt 30°
	Rotation 360°	Rotation 360°
Beam Angle	27°/44°	27°/44°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<10	<10
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Villa / Hotel / Retail	Villa / Hotel / Retail


OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



CCT Selector Switch

APPLICATIONS
Centered-aperture adjustable lighting for refined residential and hospitality interiors.

ART & OBJECT DISPLAY
Artworks, Sculptures, Feature Walls



LUXURY RESIDENTIAL
Living Areas, Dining Rooms, Private Homes



LIVING AREAS
Living Rooms, Lounges, Private Residences




BEDROOMS & SUITES
Bedrooms, Hotel Rooms, Private Suites



MOVA
ONE FAMILY. MORE POSSIBILITIES.


Trim or trimless.
Fixed or adjustable.
Multiple reflector finishes.
Different configurations. One design language.

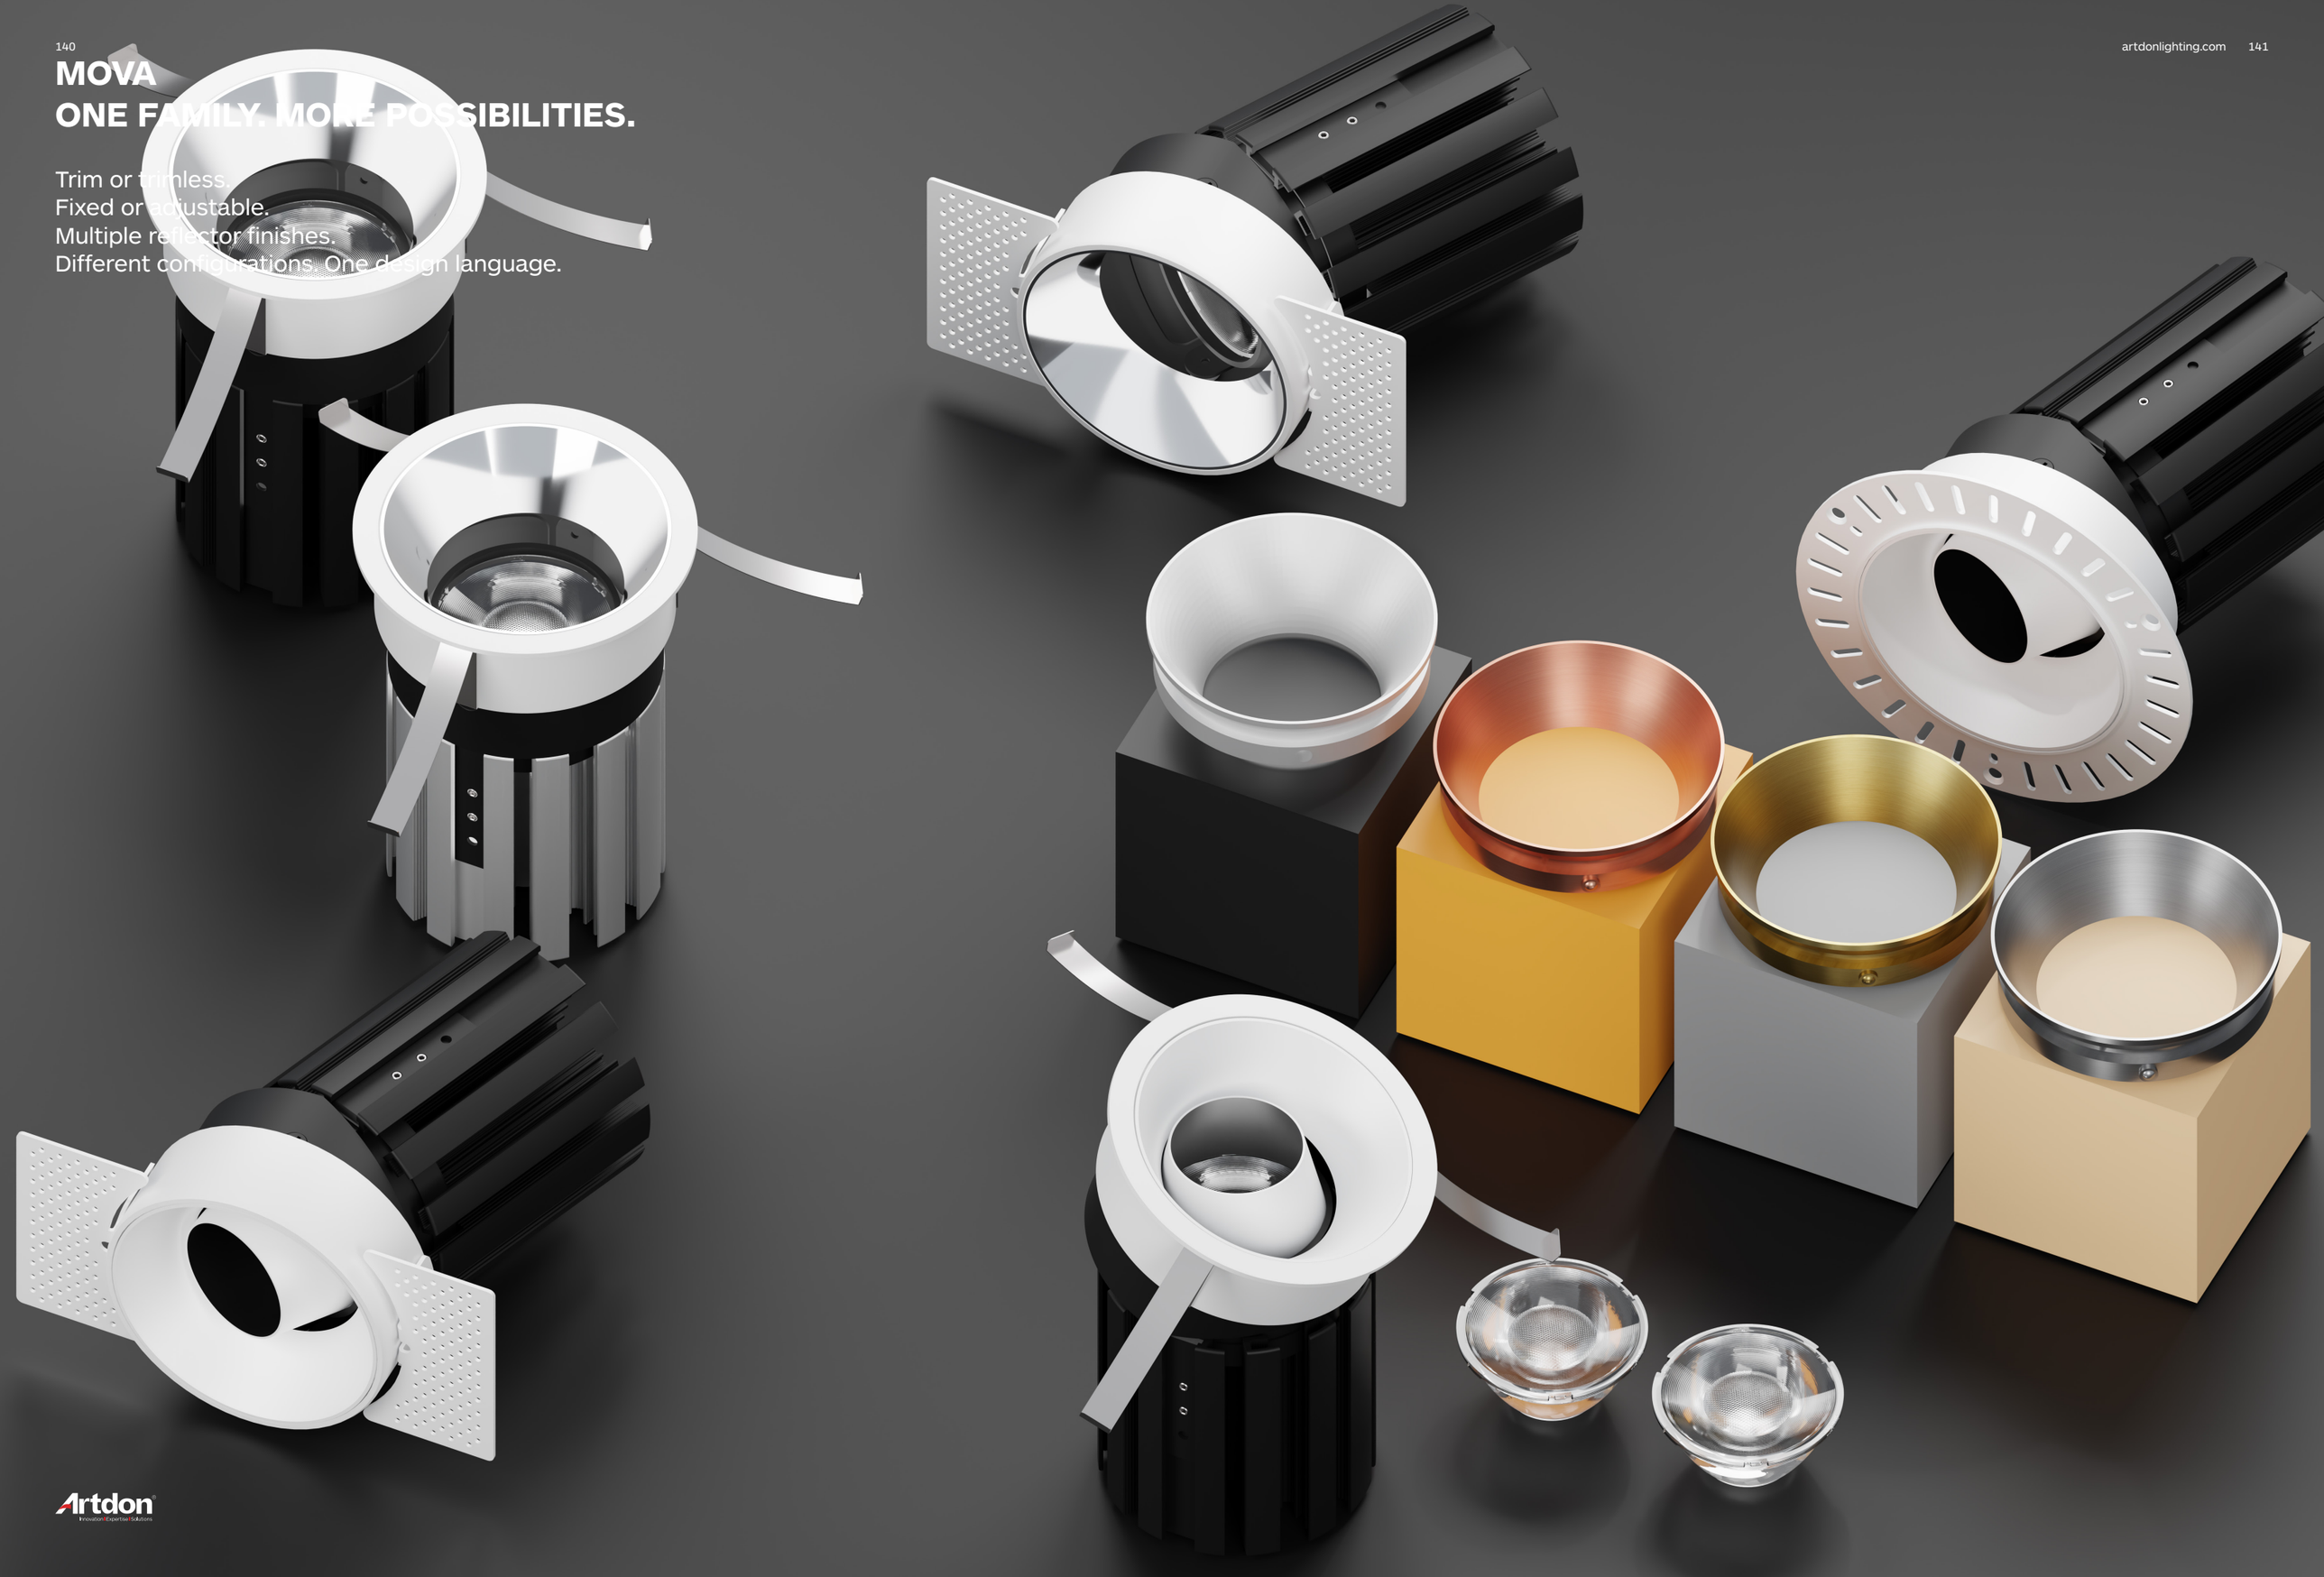

Artdon
Innovation Expertise Solutions

MOVA
ONE FAMILY. FOUR SIZES.

A consistent recessed downlight family available in four sizes for different lighting levels and project needs.

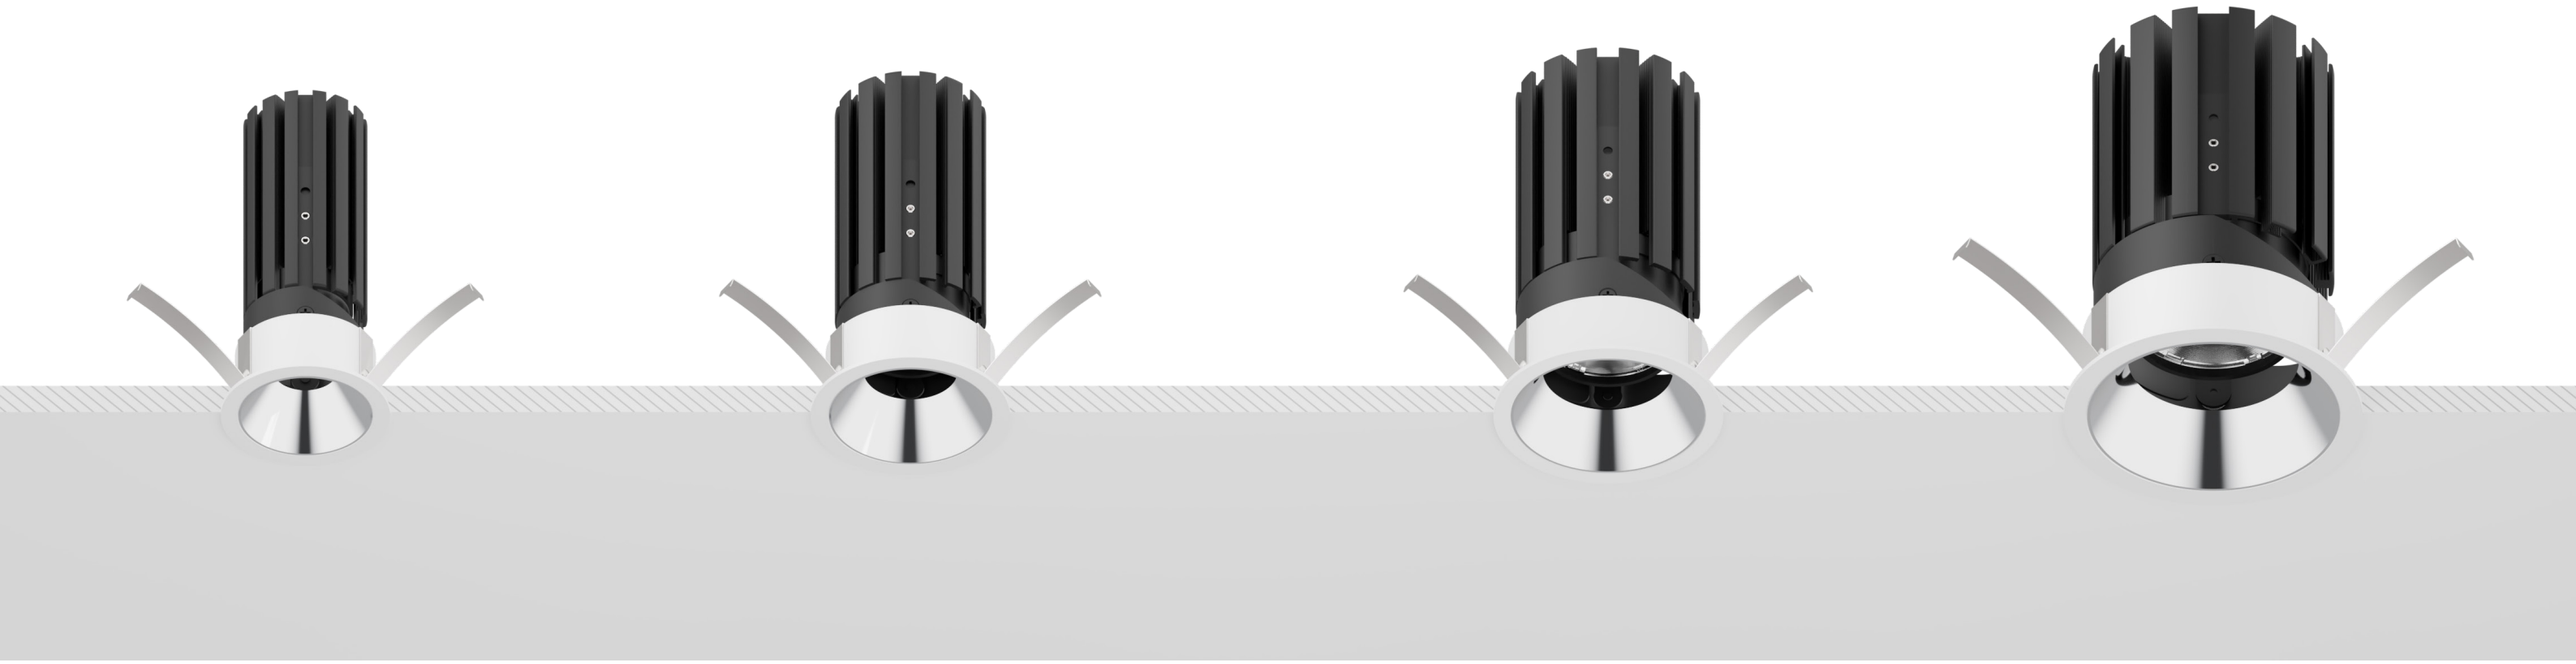

01

Ø50 mm CUT-OUT
Compact Scale

02

Ø60 mm CUT-OUT
Balanced Performance

03


Ø70 mm CUT-OUT
Balanced Performance

04

Ø90 mm CUT-OUT
Large-Scale Lighting

MOVA
ONE FAMILY. FOUR LIGHTING OPTIONS.

Snoot, adjustable, fixed and deep anti-glare configurations within one consistent design language.

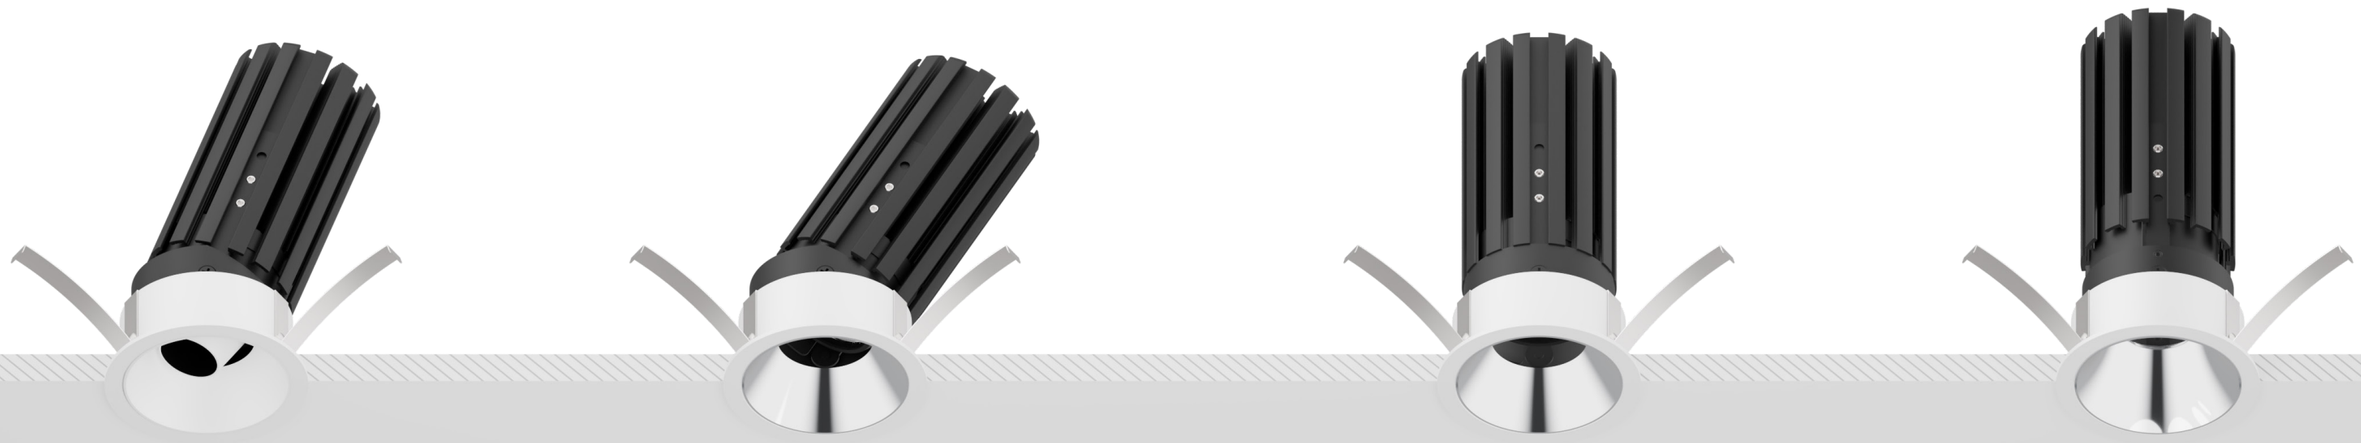

01

SNOOT
Focused Light, Reduced Glare

02

ADJUSTABLE
Directional Light Control

03

FIXED
Clean, Stable Illumination

04

DEEP ANTI-GLARE REFLECTOR
Deeper Cut-Off, Reduced Glare

MOVA
FIVE INSTALLATION OPTIONS

A modular recessed family with five installation structures for different ceiling applications.

TWING TRIMLESS
Seamless plaster-in installation.

ROUND TRIMLESS
Clean round trimless detail.



SPRING TRIM
Standard spring-clip installation.



BLADE-SPRING TRIM
Secure blade-spring fixing.



V-SPRING TRIM
Stable V-spring fixing.

OPTICAL ACCESSORIES
Flexible optics for different lighting requirements.



PROTECTIVE GLASS
Clean, Stable Downlight



LINEAR SPREAD LENS
Elongated Light Distribution



GLASS WITH WATERPROOF RING
Protective glass with integrated waterproof ring



HONEYCOMB LOUVER
Reduced glare



TEXTURED GLASS
Softens light for a more comfortable effect



COLOR FILTER
Optional colour effects

REFLECTOR FINISHES
Six finishes for coordinated interior detailing.



WHITE



BLACK



SILVER



BLACK CHROME



GOLD




ROSE GOLD

MOVA

ONE FAMILY. THREE MOUNTING OPTIONS. TRIM

Clean. Practical. Familiar.

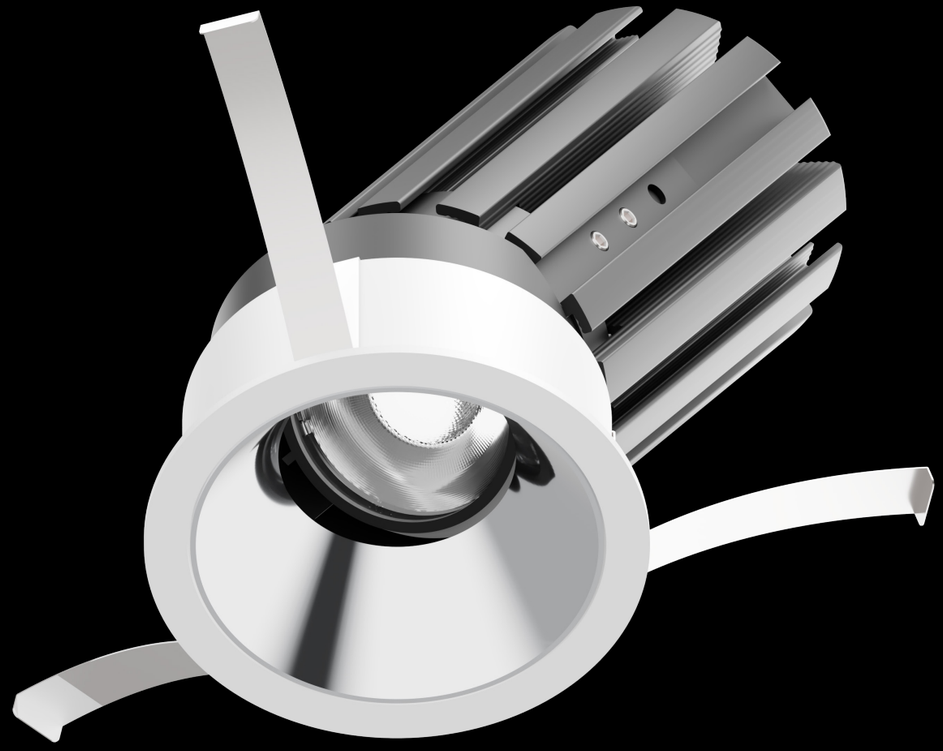



01

FRONT VIEW



02

SIDE VIEW



03

REAR VIEW

MOVA
ADJUSTABLE RECESSED DOWNLIGHT

MOVA Adjustable is designed for flexible directional lighting within a clean, consistent recessed family.

Its adjustable light engine allows the beam to be aimed where needed, while the anti-glare reflector helps maintain visual comfort.

Available in four cut-out sizes: 50 mm, 60 mm, 70 mm and 90 mm. MOVA keeps one consistent design language across different lighting levels and project needs.

FLEXIBLE AIMING
Direct Light Where Needed

ANTI-GLARE REFLECTOR
Improved Visual Comfort

FOUR CUT-OUT SIZES
Ø50 / Ø60 / Ø70 / Ø90

ONE DESIGN LANGUAGE
Consistent Across the Family


Artdon

MOVA
RECESSED DOWNLIGHT

52.05019




52.05019 H=119mm/52.05022 H=99mm



52.06021




52.06021 H=125mm/52.06025 H=105mm




52.07015




52.07015 H=129mm/52.07018 H=109mm



52.09013



52.09013 H=140mm/52.09017 H=119mm



Model	52.05019	52.05022	52.06021	52.06025	52.07015	52.07018	52.09013	52.09017
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø56*119mm		Ø66*125mm		Ø76*129mm		Ø99*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch


APPLICATIONS
Flexible directional lighting for refined commercial and residential interiors.

COMMERCIAL INTERIORS
Lobbies, Reception Areas

LUXURY RESIDENTIAL
Villas, Private Homes

OFFICES & WORKSPACES
Executive Offices, Meeting Areas

HOSPITALITY
Hotels, Lounges, Public Areas









MOVA
FIXED RECESSED DOWNLIGHT

MOVA Fixed is designed for comfortable general lighting with a clean and consistent recessed appearance.

Its fixed optical system delivers stable, controlled illumination, while the anti-glare reflector helps reduce visual glare in everyday interior spaces.

Available in multiple cut-out sizes, MOVA Fixed brings one consistent design language to hospitality, retail, residential and commercial projects.

STABLE BY DESIGN
Fixed Optical System

ANTI-GLARE REFLECTOR
Improved Visual Comfort

GENERAL LIGHTING
Uniform Everyday Illumination

ONE FAMILY. MULTIPLE SIZES.
For Different Project Needs

MOVA
RECESSED DOWNLIGHT

51.05017



51.05017 H=119mm/51.05019 H=99mm

51.06011



51.06011 H=125mm/51.06013 H=105mm

51.07012





51.07012 H=129mm/51.07015 H=109mm


51.09013




51.09013 H=140mm/51.09016 H=119mm









Model	51.05017	51.05019	51.06011	51.06013	51.07012	51.07015	51.09013	51.09016
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø56*119mm		Ø66*125mm		Ø76*129mm		Ø99*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Comfortable general lighting for everyday commercial and hospitality interiors.

CAFÉS & BAKERIES
Cafés, Pastry Shops

BOOKSTORES
Books, Lifestyle Retail


ART GALLERIES
Paintings, Exhibitions

HOSPITALITY
Hotels, Lounges, Restaurants









MOVA
DEEP ANTI-GLARE RECESSED DOWNLIGHT

MOVA Deep is a fixed recessed downlight developed for spaces where visual comfort and controlled general lighting are especially important.

Its extended anti-glare reflector places the light source deeper inside the luminaire, helping reduce direct glare and improve visual comfort.

With the same consistent MOVA design language, it is well suited to retail, hospitality and other interiors requiring comfortable everyday illumination.

EXTENDED ANTI-GLARE REFLECTOR
Deeper Cut-Off, Reduced Glare

FIXED OPTICAL SYSTEM
Stable, Controlled Illumination

HIGH VISUAL COMFORT
Reduced Direct Glare

GENERAL LIGHTING
Comfortable Everyday Illumination

Artdon

MOVA
RECESSED DOWNLIGHT

51.05018



51.05018 H=127mm/51.05020 H=107mm

51.06012



51.06012 H=134mm/51.06015 H=115mm

51.07013





51.07013 H=139mm/51.07016 H=119mm


51.09015




51.09015 H=149mm/51.09017 H=129mm









Model	51.05018	51.05020	51.06012	51.06015	51.07013	51.07016	51.09015	51.09017
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø56*127mm		Ø66*134mm		Ø76*139mm		Ø99*149mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 736lm	3000K 532lm	3000K 1115lm	3000K 824lm	3000K 2310lm	3000K 1443lm	3000K 4278lm	3000K 3477lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/22°/30°/42°		22°/26°/39°/48°		21°/32°/40°/48°		25°/32°/43°/49°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Comfortable low-glare lighting for refined retail and hospitality interiors.

LIFESTYLE SHOWROOMS
Furniture, Interior Displays

FASHION RETAIL
Boutiques, Apparel Stores

FASHION BOUTIQUES
Clothing, Display Areas

BEAUTY RETAIL
Cosmetics, Product Displays










MOVA
ANTI-GLARE SNOOT RECESSED DOWNLIGHT

MOVA Snoot combines directional lighting with an extended anti-glare structure for more controlled accent illumination.

The forward snoot helps shield the light source from view, reducing side glare and unwanted spill while keeping the beam focused on the display.


With adjustable aiming and a clean recessed appearance, it is ideal for galleries, retail displays and other spaces where precise light and visual comfort are equally important.

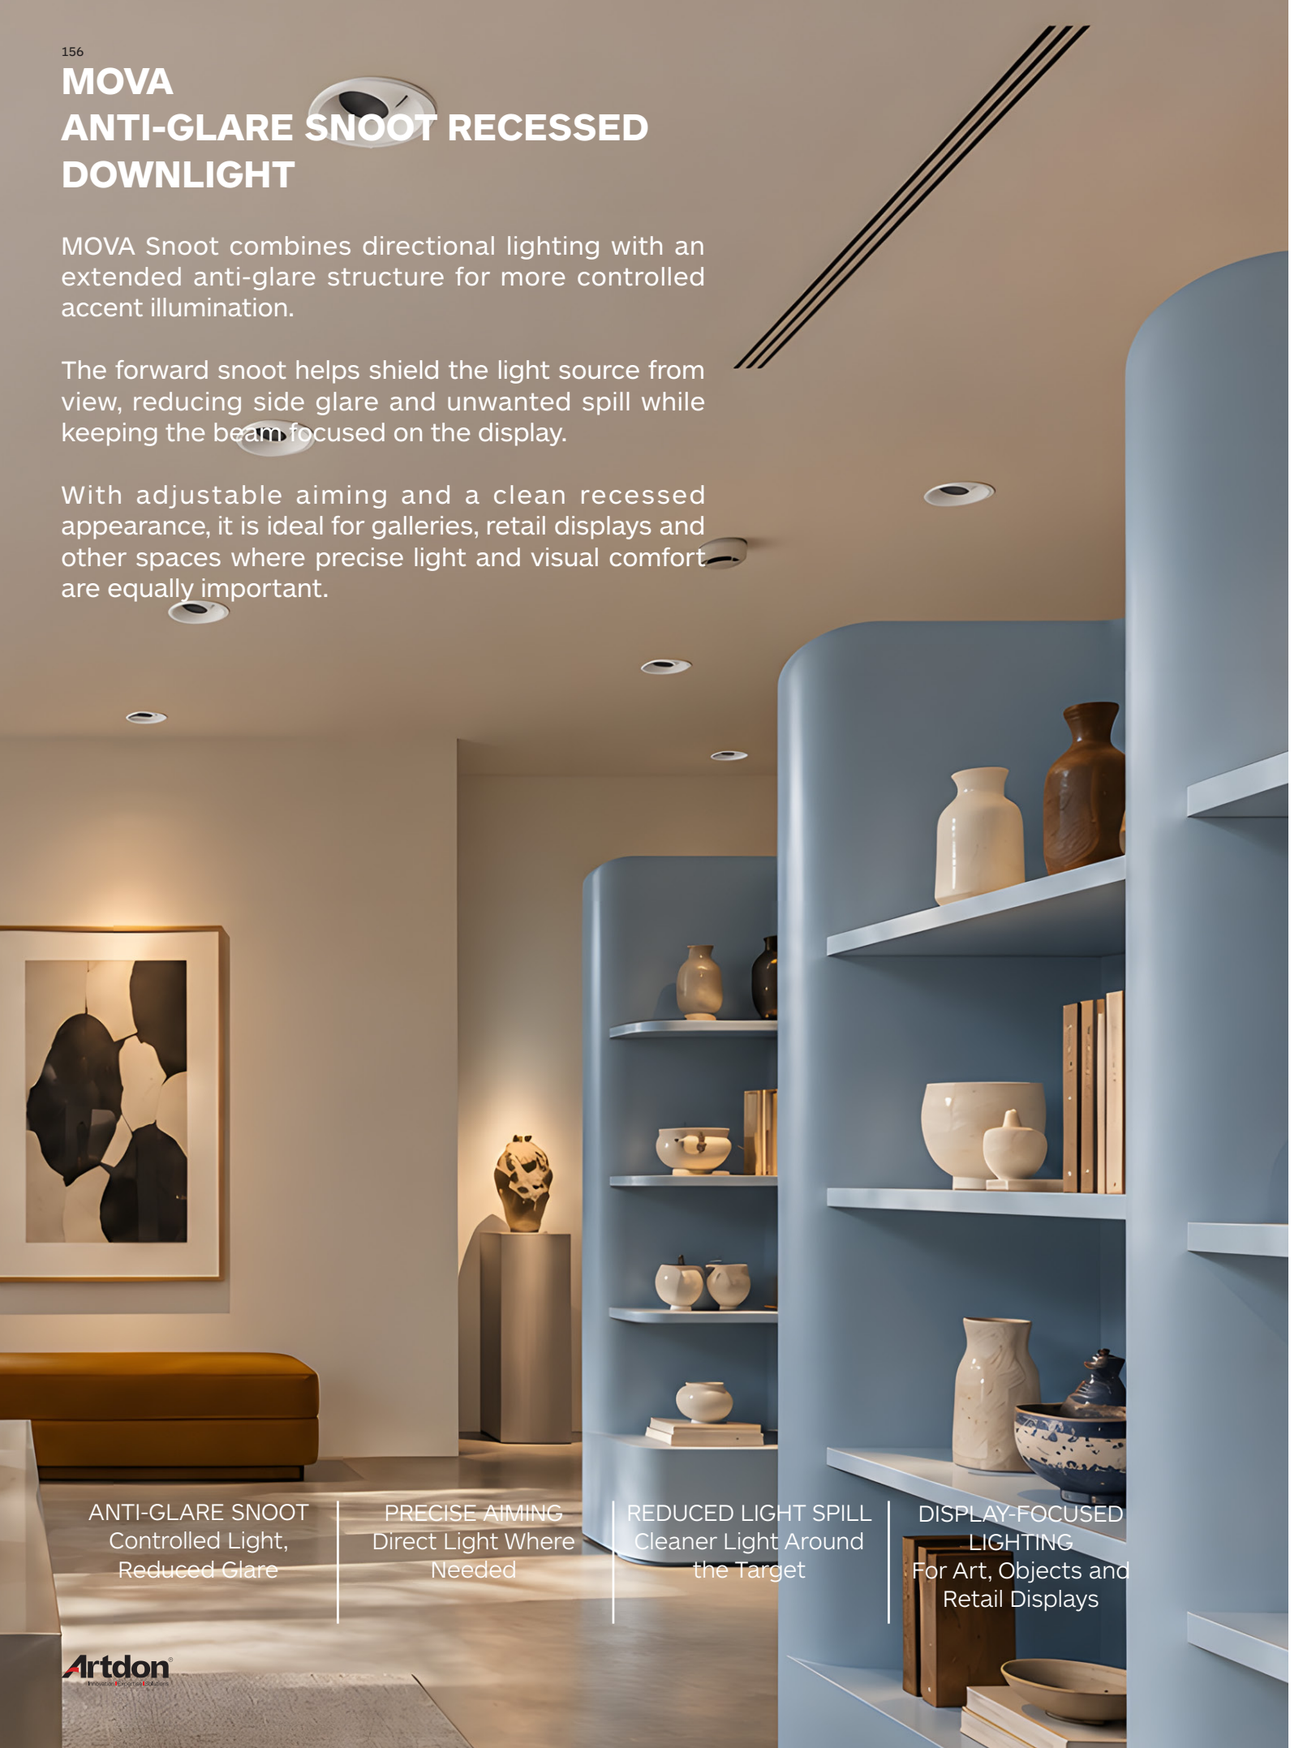

MOVA
RECESSED DOWNLIGHT




52.05018 H=119mm/52.05021 H=99mm






52.06020 H=125mm/52.06023 H=105mm






52.07013 H=129mm/52.07017 H=109mm





52.09012 H=140mm/52.09016 H=119mm



Model	52.05018	52.05021	52.06020	52.06023	52.07013	52.07017	52.09012	52.09016
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø56*119mm		Ø66*125mm		Ø76*129mm		Ø99*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	9W 36V 250mA	24W 36V 600mA	14W 36V 350mA	41W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 600lm	3000K 430lm	3000K 1055lm	3000K 775lm	3000K 2299lm	3000K 1432lm	3000K 4048lm	3000K 3281lm
Adjustability	Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°	
Beam Angle	20°/23°/30°/42°		25°/28°/41°/47°		21°/32°/40°/52°		25°/35°/40°/51°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch


APPLICATIONS
Controlled accent lighting for art, objects and focused displays.


ART & DISPLAY
Artworks, Feature Objects

ART GALLERIES
Paintings, Exhibitions

LUXURY RETAIL
Shelves, Product Displays

HOSPITALITY
Lounges, Decorative Displays



MOVA

ONE FAMILY. THREE MOUNTING OPTIONS. ROUND TRIMLESS

Seamless circular ceiling integration.





01

FRONT VIEW



02

SIDE VIEW



03

REAR VIEW

MOVA
ROUND TRIMLESS ADJUSTABLE DOWNLIGHT

MOVA Round Trimless combines flexible directional lighting with a clean, seamless ceiling appearance.

Its adjustable light engine allows precise aiming, while the round trimless frame integrates neatly into the ceiling with no visible outer trim.

Designed for refined interiors, it brings flexible accent lighting and a consistent architectural look across retail, gallery, residential and hospitality projects.

ROUND TRIMLESS DESIGN
Seamless Ceiling Integration

ADJUSTABLE LIGHT ENGINE
Direct Light Where Needed

ANTI-GLARE REFLECTOR
Improved Visual Comfort

CLEAN ARCHITECTURAL LOOK
Minimal Visual Presence


Artdon
Innovation Expertise Solutions

MOVA
RECESSED DOWNLIGHT

57.05018




57.05018 H=119mm/57.05023 H=99mm



57.06021




57.06021 H=125mm/57.06027 H=105mm



57.07020




57.07020 H=129mm/57.07026 H=109mm



57.09018



57.09018 H=140mm/57.09023 H=119mm



Model	57.05018	57.05023	57.06021	57.06027	57.07020	57.07026	57.09018	57.09023
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø85*119mm		Ø95*125mm		Ø105*129mm		Ø125*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Seamless adjustable lighting for refined display and interior spaces.

LUXURY RETAIL
Jewellery, Display Counters

ART GALLERIES
Artworks, Exhibitions

DESIGN SHOWROOMS
Interiors, Product Displays

HOSPITALITY
Lounges, Public Areas









MOVA
ROUND TRIMLESS FIXED DOWNLIGHT

MOVA Round Trimless Fixed is designed for clean, comfortable general lighting with a seamless ceiling appearance.

Its fixed optical system provides stable, controlled illumination, while the anti-glare reflector helps reduce direct glare for better visual comfort.

Available in multiple sizes, it brings a consistent architectural look to residential, hospitality and commercial interiors.

ROUND TRIMLESS DESIGN
Seamless Ceiling Integration

FIXED OPTICAL SYSTEM
Stable, Controlled Illumination

ANTI-GLARE REFLECTOR
Improved Visual Comfort

GENERAL LIGHTING
Comfortable Everyday Light

MOVA
RECESSED DOWNLIGHT

60.05015



60.05015 H=119mm/60.05019 H=99mm

60.06015



60.06015 H=125mm/60.06019 H=105mm

60.07013





60.07013 H=129mm/60.07018 H=109mm


60.09016




60.09016 H=140mm/60.09020 H=119mm









Model	60.05015	60.05019	60.06015	60.06019	60.07013	60.07018	60.09016	60.09020
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø85*119mm		Ø95*125mm		Ø105*129mm		Ø125*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Seamless low-glare lighting for residential, hospitality and lifestyle interiors.

HOSPITALITY LOUNGES
Lounges, Social Areas

LUXURY RESIDENTIAL
Living Rooms, Private Homes


CAFÉS & DINING
Cafés, Restaurants

LIFESTYLE RETAIL
Homeware, Display Areas









MOVA
ROUND TRIMLESS DEEP ANTI-GLARE DOWNLIGHT

MOVA Round Trimless Deep Anti-Glare Downlight is designed for clean ceiling integration in refined architectural interiors.

Its round trimless form keeps the aperture quiet and minimal, while the deep anti-glare reflector improves visual comfort and reduces direct glare.

With fixed light distribution and multiple cut-out sizes, it offers a consistent solution for residential, hospitality and high-end commercial spaces where both comfort and ceiling detail matter.

SEAMLESS CEILING DETAIL
Round Trimless Design
Clean Architectural Finish

VISUAL COMFORT
Deep Anti-Glare Reflector
Deeper Cut-Off, Reduced Glare

CONTROLLED LIGHT
Fixed Downlight
Precise Beam Control


CONSISTENT FAMILY
Multiple Cut-Out Sizes
Unified Design Language

MOVA
RECESSED DOWNLIGHT

60.05016




60.05016 H=127mm/60.05020 H=107mm



60.06016




60.06016 H=134mm/60.06020 H=115mm



60.07015




60.07015 H=139mm/60.07019 H=119mm



60.09017



60.09017 H=149mm/60.09021 H=129mm



Model	60.05016	60.05020	60.06016	60.06020	60.07015	60.07019	60.09017	60.09021
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø85*127mm		Ø95*134mm		Ø105*139mm		Ø125*149mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 736lm	3000K 532lm	3000K 1115lm	3000K 824lm	3000K 2310lm	3000K 1443lm	3000K 4278lm	3000K 3477lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/22°/30°/42°		22°/26°/39°/48°		21°/32°/40°/48°		25°/32°/43°/49°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Comfortable low-glare lighting for refined retail, workplace and hospitality interiors.

PREMIUM SHOWROOMS
Retail, Product Displays

EXECUTIVE WORKSPACES
Offices, Meeting Rooms

FASHION SHOWROOMS
Apparel, Display Areas

HOSPITALITY LOUNGES
Hotels, Lounges, Club Spaces









MOVA
ROUND TRIMLESS ANTI-GLARE SNOOT DOWNLIGHT

MOVA Round Trimless Snoot combines precise directional lighting with a clean, seamless ceiling appearance.

Its extended anti-glare snoot helps shield the light source from view, reducing side glare and unwanted spill while keeping the light focused on the target.

With adjustable aiming and trimless ceiling integration, it is ideal for galleries, premium retail and other refined display spaces.




MOVA
RECESSED DOWNLIGHT

57.05017




57.05017 H=119mm/57.05022 H=99mm



57.06020




57.06020 H=125mm/57.06026 H=105mm



57.07019




57.07019 H=129mm/57.07025 H=109mm



57.09017



57.09017 H=140mm/57.09022 H=119mm



Model	57.05017	57.05022	57.06020	57.06026	57.07019	57.07025	57.09017	57.09022
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø85*119mm		Ø95*125mm		Ø105*129mm		Ø125*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	9W 36V 250mA	24W 36V 600mA	14W 36V 350mA	41W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 600lm	3000K 430lm	3000K 1055lm	3000K 775lm	3000K 2299lm	3000K 1432lm	3000K 4048lm	3000K 3281lm
Adjustability	Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°	
Beam Angle	20°/23°/30°/42°		25°/28°/41°/47°		21°/32°/40°/52°		25°/35°/40°/51°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch


APPLICATIONS
Controlled accent lighting for refined display and hospitality interiors.

PREMIUM SHOWROOMS
Retail, Feature Displays

ART GALLERIES
Paintings, Exhibitions


LUXURY RETAIL
Shelves, Product Displays

HOSPITALITY
Lounges, Decorative Displays









MOVA

ONE FAMILY. THREE MOUNTING OPTIONS. WINGED TRIMLESS

Clean plaster-in ceiling integration.





01

FRONT VIEW



02

SIDE VIEW



03

REAR VIEW

MOVA
WINGED TRIMLESS ADJUSTABLE DOWNLIGHT

MOVA Winged Trimless Adjustable Downlight combines flexible directional lighting with a clean trimless ceiling appearance.

Its winged plaster-in frame provides secure trimless installation, while the adjustable light engine allows precise aiming for different lighting needs.

Designed for refined retail, gallery and residential interiors, it delivers flexible accent lighting with minimal visual presence.

WINGED TRIMLESS DESIGN
Clean Plaster-In Installation

ADJUSTABLE LIGHT ENGINE
Direct Light Where Needed

ANTI-GLARE REFLECTOR
Improved Visual Comfort

MINIMAL CEILING PRESENCE
Clean Architectural Finish


Artdon
Innovation Expertise Solutions

MOVA
RECESSED DOWNLIGHT

57.05015




57.05015 H=119mm/57.05021 H=99mm



57.06018




57.06018 H=125mm/57.06025 H=105mm




57.07017




57.07017 H=129mm/57.07023 H=109mm



57.09015



57.09015 H=140mm/57.09021 H=119mm



Model	57.05015	57.05021	57.06018	57.06025	57.07017	57.07023	57.09015	57.09021
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø49*119mm		Ø59*125mm		Ø69*129mm		Ø89*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°		Tilt 30° Rotation 350°	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Flexible trimless accent lighting for refined display and interior spaces.

ART GALLERIES
Artworks, Exhibitions, Display Walls



FINE DINING
Restaurants, Dining Rooms, Feature Tables



HOSPITALITY
Hotels, Lounges, Guest Areas



CAFÉS & DINING
Cafés, Casual Dining, Table Areas



MOVA
WINGED TRIMLESS FIXED DOWNLIGHT

MOVA Winged Trimless Fixed is designed for clean, seamless ceiling integration with stable general lighting.

Its fixed optical system delivers controlled illumination, while the anti-glare reflector helps improve visual comfort.

The winged plaster-in structure creates a minimal architectural finish, ideal for refined retail, showroom and commercial interiors.

WINGED TRIMLESS DESIGN
Clean Plaster-In Installation

FIXED OPTICAL SYSTEM
Stable, Controlled Light

ANTI-GLARE REFLECTOR
Improved Visual Comfort

MINIMAL CEILING PRESENCE
Clean Architectural Finish


Artdon
Innovation Expertise Solutions

MOVA
RECESSED DOWNLIGHT

60.05012




60.05012 H=119mm/60.05017 H=99mm




60.06012




60.06012 H=125mm/60.06017 H=105mm




60.07011




60.07011 H=129mm/60.07016 H=109mm



60.09013



60.09013 H=140mm/60.09018 H=119mm



Model	60.05012	60.05017	60.06012	60.06017	60.07011	60.07016	60.09013	60.09018
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø49*119mm		Ø59*125mm		Ø69*129mm		Ø89*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 758lm	3000K 546lm	3000K 1107lm	3000K 814lm	3000K 2322lm	3000K 1447lm	3000K 4300lm	3000K 3511lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/23°/30°/46°		21°/25°/36°/45°		20°/32°/40°/48°		25°/32°/43°/52°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel		Retail / Gallery / Hotel	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Clean fixed downlighting for refined retail and display interiors.

SPECIALTY RETAIL
Shelves, Product Displays

LUXURY RETAIL
Jewellery, Accessories

FASHION RETAIL
Apparel, Display Areas

APPAREL STORES
Clothing, Fitting Areas









MOVA
WINGED TRIMLESS DEEP ANTI-GLARE FIXED DOWNLIGHT

MOVA Winged Trimless Deep Anti-Glare Fixed Downlight combines clean trimless ceiling integration with enhanced glare control.

Its extended anti-glare reflector places the light source deeper inside the luminaire, creating a deeper cut-off and reducing direct glare.

With a fixed optical system and winged plaster-in structure, it provides comfortable general lighting for refined residential, hospitality and commercial interiors.

WINGED TRIMLESS DESIGN
Clean Plaster-In Installation

EXTENDED ANTI-GLARE REFLECTOR
Deeper Cut-Off, Reduced Glare

FIXED OPTICAL SYSTEM
Stable, Controlled Illumination

VISUAL COMFORT
Quiet Light for Refined Interiors

MOVA
RECESSED DOWNLIGHT

60.05013




60.05013 H=127mm/60.05018 H=107mm

60.06013




60.06013 H=134mm/60.06018 H=115mm

60.07012





60.07012 H=139mm/60.07017 H=119mm


60.09015




60.09015 H=149mm/60.09019 H=129mm









Model	60.05013	60.05018	60.06013	60.06018	60.07012	60.07017	60.09015	60.09019
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø49*127mm		Ø59*134mm		Ø69*139mm		Ø89*149mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	10W 36V 250mA	24W 36V 600mA	14W 36V 350mA	40W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 736lm	3000K 532lm	3000K 1115lm	3000K 824lm	3000K 2310lm	3000K 1443lm	3000K 4278lm	3000K 3477lm
Adjustability	--		--		--		--	
	--		--		--		--	
Beam Angle	18°/22°/30°/42°		22°/26°/39°/48°		21°/32°/40°/48°		25°/32°/43°/51°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass




Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Comfortable low-glare lighting for refined interior spaces.

HOSPITALITY LOUNGES
Lounges, Social Areas



LUXURY RESIDENTIAL
Living Rooms, Private Homes



CAFÉS & DINING
Cafés, Restaurants



HOTEL CORRIDORS
Corridors, Circulation Areas



MOVA
WINGED TRIMLESS SNOOT ADJUSTABLE DOWNLIGHT

MOVA Winged Trimless Snoot Adjustable Downlight is designed for refined interiors that require focused lighting, visual comfort and clean trimless ceiling integration.

Its adjustable light engine allows the beam to be aimed precisely where needed, while the snoot accessory provides deeper shielding to reduce glare and improve visual control.

With its winged trimless structure, MOVA creates a quiet ceiling appearance and offers a flexible solution for residential, hospitality and boutique retail applications.

WINGED TRIMLESS DESIGN
Clean Plaster-In Installation

SNOOT ACCESSORY
Focused Beam, Reduced Glare

ADJUSTABLE LIGHTING
Aim Light Where Needed

QUIET CEILING EFFECT
Minimal Presence, Refined Look


Artdon
Innovation|Expertise|Solutions

MOVA
RECESSED DOWNLIGHT

57.05013




57.05013 H=119mm/57.05020 H=99mm



57.06017




57.06017 H=125mm/57.06023 H=105mm




57.07016




57.07016 H=129mm/57.07022 H=109mm



57.09013



57.09013 H=140mm/57.09020 H=119mm



Model	57.05013	57.05020	57.06017	57.06023	57.07016	57.07022	57.09013	57.09020
Cut-Out Size	Ø50mm		Ø60mm		Ø70mm		Ø90mm	
Dimensions	Ø49*119mm		Ø59*125mm		Ø69*129mm		Ø89*140mm	
Power	12W 36V 300mA	8W 36V 200mA	14W 36V 350mA	9W 36V 250mA	24W 36V 600mA	14W 36V 350mA	41W 36V 1050mA	31W 36V 800mA
Luminous flux	3000K 600lm	3000K 430lm	3000K 1055lm	3000K 775lm	3000K 2299lm	3000K 1432lm	3000K 4048lm	3000K 3281lm
Adjustability	Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°		Tilt 20° Rotation 350°	
Beam Angle	20°/23°/30°/42°		25°/28°/41°/47°		21°/32°/40°/52°		25°/35°/40°/51°	
CCT	2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K		2700K/3000K/3500K/4000K	
CRI	CRI 90		CRI 90		CRI 90		CRI 90	
UGR	<19		<19		<19		<19	
Dimming method	TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V		TRIAC / DALI / 0-10V	
IP rating	IP20		IP20		IP20		IP20	
Best for	Retail / Hospitality		Retail / Hospitality		Retail / Hospitality		Retail / Hospitality	

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Focused adjustable lighting for refined interiors with clean ceiling integration and reduced glare.

LUXURY RETAIL
Jewellery, Accessories

LUXURY RESIDENTIAL
Living Rooms, Private Homes

BOUTIQUE RETAIL
Display Shelves, Showrooms

HOSPITALITY
Lounges, Reception Areas









EMMA
ADJUSTABLE RECESSED SPOTLIGHT

EMMA combines the flexibility of a track spotlight with the cleaner appearance of recessed installation.

With 90° tilt and 350° rotation, the luminaire can direct light from straight down to almost horizontal, making it easy to illuminate merchandise, walls and changing display areas from a fixed ceiling point.

Available in four sizes from Ø45 to Ø90, EMMA brings one consistent design language across different lighting levels and project scales.

FROM DOWNLIGHT TO SPOTLIGHT
90° Tilt

350° FREEDOM
Wide Rotation Range

ONE CEILING POINT. MORE DIRECTIONS.
Flexible Accent Lighting

FOUR SIZES. ONE DESIGN LANGUAGE.
Ø45 / Ø62 / Ø73 / Ø90

Artdon
Innovation|Expertise|Solutions


EMMA
RECESSED SPOTLIGHT




















Model	56.04011	56.05518	56.06511	56.08011
Cut-Out Size	Ø40mm	Ø55mm	Ø65mm	Ø80mm
Dimensions	Ø45*100mm	Ø62*130mm	Ø73*148mm	Ø90*160mm
Power	11W 36V 250mA	14W 36V 350mA	24W 36V 600mA	36W 36V 900mA
Luminous flux	3000K 935lm	3000K 1627lm	3000K 2963lm	3000K 4509lm
Adjustability	Tilt 90°	Tilt 90°	Tilt 90°	Tilt 90°
	Rotation 350°	Rotation 350°	Rotation 350°	Rotation 350°
Beam Angle	19°/29°/44°/56°	18°/27°/38°/54°	14°/28°/40°/50°	16°/20°/30°/45°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
UGR	--	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Retail / Display	Retail / Display	Retail / Display	Retail / Display

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Flexible accent lighting for fashion retail and display spaces where precise aiming and visual focus matter.

FASHION RETAIL
Apparel, Mannequins, Display Areas



LUXURY BOUTIQUES
Fashion, Accessories, Feature Displays



FOOTWEAR & ACCESSORIES
Shoes, Bags, Display Shelves



FASHION SHOWROOMS
Apparel, Product Displays, Brand Spaces



NOVAL
RECESSED DOWNLIGHT

NOVAL is a semi-recessed adjustable spotlight family designed for precise accent lighting.
Its center-point aiming structure keeps the beam visually centered during adjustment, combining flexible directional lighting with a clean, compact ceiling appearance.

SEMI-RECESSED DESIGN
Compact Ceiling Integration
Minimal Visual Presence

CENTER-POINT AIMING
Beam Stays Centered During Adjustment

FLEXIBLE ADJUSTMENT
90° Tilt
350° Rotation


PRECISION ACCENT LIGHTING
Focused Beam Control For Display & Feature Lighting

Artdon
Innovation Expertise Solutions

NOVAL
RECESSED DOWNLIGHT


56.02311






56.02312





56.02313





Model	**56.02311**	**56.02312**	**56.02313**
Cut-Out Size	Ø23mm	23*23mm	62*23mm
Dimensions	Ø26*82mm	26*26*79mm	66*26*79mm
Power	4W 36V 80mA	4W 36V 80mA	2*4W 36V 80mA
Luminous flux	3000K 197lm	3000K 197lm	3000K 2*197lm
Adjustability	Tilt 90°	Tilt 90°	Tilt 90°
	Rotation 350°	Rotation 350°	Rotation 350°
Beam Angle	17°/26°/31°/53°	17°/26°/31°/53°	17°/26°/31°/53°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<9	<9	<9
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Beauty / Jewellery	Retail / Beauty / Jewellery	Retail / Beauty / Jewellery

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver

APPLICATIONS
Designed for precise accent lighting where compact installation and flexible aiming are required.

DISPLAY SHELVES
Decorative Objects, Art Pieces & Collections



LUXURY RETAIL
Fashion, Handbags, Accessories & Displays



BEAUTY & COSMETICS
Perfume, Cosmetics, Premium Product Displays



WATCH & JEWELLERY
Watches, Jewellery, High-End Showcase Displays



NOVAL
RECESSED DOWNLIGHT

NOVAL is a semi-recessed adjustable spotlight family designed for precise accent lighting.
Its center-point aiming structure keeps the beam visually centered during adjustment, combining flexible directional lighting with a clean, compact ceiling appearance.

SEMI-RECESSED DESIGN
Compact Ceiling Integration
Minimal Visual Presence

CENTER-POINT AIMING
Beam Stays Centered During Adjustment

FLEXIBLE ADJUSTMENT
90° Tilt
350° Rotation


PRECISION ACCENT LIGHTING
Focused Beam Control For Display & Feature Lighting

Artdon

NOVAL
RECESSED DOWNLIGHT


56.03711







56.03712





56.03713





Model	**56.03711**	**56.03712**	**56.03713**
Cut-Out Size	Ø37mm	37*37mm	96*37mm
Dimensions	Ø40*113mm	40*40*113mm	100*40*113mm
Power	6W 36V 150mA	6W 36V 150mA	2*6W 36V 150mA
Luminous flux	3000K 478lm	3000K 478lm	3000K 2*478lm
Adjustability	Tilt 90°	Tilt 90°	Tilt 90°
	Rotation 350°	Rotation 350°	Rotation 350°
Beam Angle	18°/23°/33°/42°	18°/23°/33°/42°	18°/23°/33°/42°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<9	<9	<9
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Beauty / Jewellery	Retail / Beauty / Jewellery	Retail / Beauty / Jewellery

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver

APPLICATIONS
Compact semi-recessed accent lighting for retail, beauty and jewellery displays.

DISPLAY SHELVES
Decorative Objects, Art Pieces & Collections



LUXURY RETAIL
Fashion, Handbags, Accessories & Displays



BEAUTY & COSMETICS
Perfume, Cosmetics, Premium Product Displays



WATCH & JEWELLERY
Watches, Jewellery, High-End Showcase Displays



LITE
RECESSED DOWNLIGHT

Small in Scale. Exceptional in Comfort.



LITE is a compact recessed downlight family designed for discreet architectural integration and exceptional visual comfort.

Deep shielding and a 45° cut-off angle keep the light source concealed from normal viewing angles, delivering soft, controlled illumination with minimal visual glare.

UGR<0
Ultra-low glare

45°
Cut-off angle

∅45/55
Cut-Out size


7W-14W
Power range

BEST FOR

- Luxury Residential
- Hotels & Hospitality
- Boutiques & Retail
- Private Galleries
- Premium Commercial Spaces

45° DEEP SHIELDING

Deep optical shielding conceals the light source from normal viewing angles, reducing direct glare while maintaining effective illumination below.



Artdon
Innovation Expertise Solutions

LITE
RECESSED DOWNLIGHT

Ceiling Integration & Details

Thoughtful details combine visual comfort, refined finishes and easy service for seamless architectural integration.





White Black Silver Gun Black

Interchangeable lower covers allow the visible finish to coordinate with different ceiling materials and interior palettes.

01

VISUAL COMFORT

Deep Shielding

45° cut-off geometry keeps the light source concealed and reduces direct glare.

02

ARCHITECTURAL INTEGRATION

Interchangeable Finishes

Multiple visible finishes allow LITE to integrate quietly into different ceiling and interior concepts.

03

EASY SERVICE

Tool-Free Access

The lower cover can be removed and replaced without special tools for easier finishing changes and maintenance.

LITE
RECESSED DOWNLIGHT

LITE is designed for spaces where visual comfort and a clean ceiling are equally important.

Its compact aperture and deeply recessed optics keep the luminaire visually discreet, while delivering controlled light precisely where it is needed.

COMPACT APERTURE
Ø45 / Ø55
Minimal Ceiling Presence

VISUAL COMFORT
Deep Recessed Optics
Controlled Direct Glare

PRECISE LIGHT
Multiple Beam Angles
30° Adjustable Aiming


DESIGN FLEXIBILITY
8W / 12W / 15W
Multiple Sizes & Finishes

Artdon
Innovation|Expertise|Solutions

LITE
RECESSED DOWNLIGHT


52.04539






52.04538






52.05559





52.05557





Model	52.04539	52.04538	52.05559	52.05557
Cut-Out Size	Ø45mm	Ø45mm	Ø55mm	Ø55mm
Dimensions	Ø50*92mm	Ø50*112mm	Ø61*102mm	Ø61*122mm
Power	7W 36V 180mA	10W 36V 250mA	10W 36V 250mA	14W 36V 350mA
Luminous flux	3000K 605lm	3000K 944lm	3000K 973lm	3000K 1298lm
Adjustability	Tilt 30°	Tilt 30°	Tilt 30°	Tilt 30°
	Rotation --°	Rotation --°	Rotation --°	Rotation --°
Beam Angle	20°/24°/35°/46°	24°/29°/39°/53°	30°/39°/54°	23°/26°/33°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
UGR	<0	<12	<9	<12
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Hotel / Villa / Office	Hotel / Villa / Office	Hotel / Villa / Office	Hotel / Villa / Office

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Discreet lighting for refined interiors where visual comfort and clean ceiling integration matter.

EXECUTIVE MEETING ROOM
Boardrooms, Meeting Areas, Corporate Lounges



LUXURY RESIDENTIAL
Living Rooms, Dining Areas, Private Homes



PREMIUM LIVING SPACES
Living Rooms, Lounges, Private Residences



PREMIUM OFFICE
Executive Offices, Workspaces, Meeting Areas



NEXA



MODULAR BY DESIGN

Separate components. Simple access. Easy service.

MOUNTING FRAME

Trimless Ceiling Integration

REMOVABLE LIGHT MODULE

Serviceable from Below

REFLECTOR

Gold / Silver / Black Chrome

ADJUSTMENT WITHIN REACH

01/ REMOVE

PULL DOWN TO ACCESS

Use the integrated handle to lower and remove the light module from below the ceiling.


02/ ADJUST

ROTATE TO AIM

Hold the handle and rotate the module to set the light direction.



NEXA

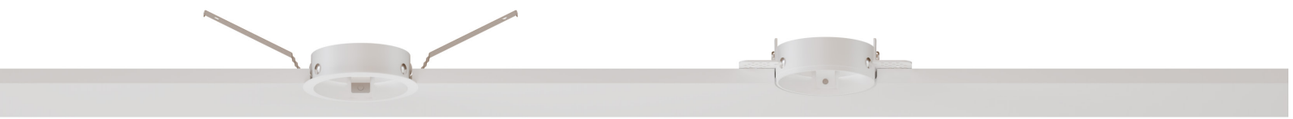





ONE LIGHT MODULE. TWO MOUNTING OPTIONS.

Within each size, the same light module fits both trim and trimless mounting frames. Three cut-out sizes maintain one consistent design language across the range.

Ø55 mm	Ø75 mm	Ø95 mm
Trimless Mounting Frame		
		
Trim Mounting Frame		
		
		

GRAVITY-ACTIVATED LIGHT SHIELD

The shield moves automatically to cover the adjustment gap and prevent light leakage.



01 / REST POSITION

Shield Raised

The shield stays raised when the module is vertical.



02 / AUTOMATIC SHIELDING

Drops by Gravity

The shield lowers automatically to cover the adjustment gap.



03 / TILT POSITION

Up to 30° Tilt

The shield continues to cover the gap as the module tilts.

NEXA
RECESSED DOWNLIGHT

NEXA is a modular recessed downlight family developed for professional architectural lighting.

Refined construction, flexible optics and deep anti-glare design deliver precise light control, visual comfort and a clean ceiling appearance across a wide range of applications.

Precision Optics
Interchangeable Beam Angles

Visual Comfort
Deep Recessed Glare Control


High Output
For Large Commercial Spaces

Flexible Installation
Multiple Sizes & Options

NEXA
RECESSED DOWNLIGHT


52.05552






52.07542





52.09538





Model	52.05552	52.07542	52.09538
Cut-Out Size	Ø55mm	Ø75mm	Ø95mm
Dimensions	Ø61*107mm	Ø81*118mm	Ø105*155mm
Power	10W 36V 250mA	15W 36V 350mA	27W 36V 700mA
Luminous flux	3000K 938lm	3000K 1555lm	3000K 2951lm
Adjustability	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°
Beam Angle	22°/31°/44°/55°	20°/26°/39°/53°	22°/32°/43°/53°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Hotel / Museum	Retail / Hotel / Museum	Retail / Hotel / Museum

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Modular architectural lighting for commercial, residential and retail environments.

COMMERCIAL SPACES
Automotive, Retail, Experience Centers



LUXURY RESIDENTIAL
Villas, Private Homes, Penthouses



AUTOMOTIVE SHOWROOMS
Car Tuning Studios, Detailing Centers



LUXURY BEDDING STORES
Bed Linens, Home Textiles, Lifestyle Retail



NEXA
RECESSED DOWNLIGHT

NEXA is a modular recessed downlight family developed for professional architectural lighting.

Refined construction, flexible optics and deep anti-glare design deliver precise light control, visual comfort and a clean ceiling appearance across a wide range of applications.

PRECISION OPTICS
Multiple Beam Angles
Precise Light Control

VISUAL COMFORT
Deep Anti-Glare Design
Clean Ceiling
Appearance

FLEXIBLE
CONFIGURATION
Multiple Sizes & Optics
Adjustable Aiming


PROJECT READY
Retail · Hospitality
Museum · Commercial

Artdon
Innovation Expertise Solutions

NEXA
RECESSED DOWNLIGHT


57.05525






57.07510





57.09518





Model	57.05525	57.07510	57.09518
Cut-Out Size	Ø55mm	Ø75mm	Ø95mm
Dimensions	Ø52*107mm	Ø73*118mm	Ø91*155mm
Power	10W 36V 250mA	15W 36V 350mA	27W 36V 700mA
Luminous flux	3000K 938lm	3000K 1555lm	3000K 2951lm
Adjustability	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°
Beam Angle	22°/31°/44°/55°	20°/26°/39°/53°	22°/32°/43°/53°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Hotel / Museum	Retail / Hotel / Museum	Retail / Hotel / Museum

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Clean adjustable downlighting for refined residential, gallery and hospitality interiors.

LUXURY RESIDENTIAL
Dining Rooms, Living Areas, Private Homes



VILLA STAIRWAYS
Staircases, Corridors, Art Walls



PRIVATE GALLERIES
Living Rooms, Art Walls, Private Collections



LUXURY RESIDENTIAL
Dining Rooms, Living Areas, Penthouse Spaces



FLEXI

ONE MODULE. TWO MOUNTING OPTIONS.

The same light module works with both trim and trimless mounting frames, giving designers more installation flexibility without changing the optical system.



TRIMLESS

Seamless Ceiling Integration

Minimal Architectural Finish

CHANGE THE FRAME. KEEP THE LIGHT.

One light engine. Two ceiling expressions.

Artdon
Innovation Expertise Solutions



One module. Two mounting options

Within each size, the same light module fits both trimmed and trimless frames. Three ceiling cut out sizes offer a consistent design language across the range.

FLEXI

THREE SIZES. ONE FAMILY.

Ø55, Ø75 and Ø100 mm cut-out sizes cover different project needs while maintaining one consistent design language.



Ø55 mm	Ø75 mm	Ø100 mm
10W	15W	28W

ONE FAMILY. MORE CONFIGURATIONS.

Choose the mounting style, light module and optical accessory to suit the project.

Quick, Practical Installation



Seamless Ceiling Integration








FIXED MODULE
Stable General Lighting

ADJUSTABLE MODULE
Flexible Directional Lighting


Optical accessories



CLEAR GLASS
Protection



TEXTURED GLASS
Softened Light



HONEYCOMB LOUVER
Reduced Glare

FLEXI
ADJUSTABLE RECESSED DOWNLIGHT

FLEXI is designed to keep light controlled even when the luminaire is tilted.

Its synchronized shielding plate moves together with the adjustable lighting module, continuously covering the exposed opening as the beam is redirected. This helps reduce unwanted light leakage and keeps the ceiling visually clean at different aiming angles.

Combined with flexible rotation, multiple sizes and interchangeable optical components, FLEXI delivers directional lighting without sacrificing a refined recessed appearance.



SHIELDING THAT MOVES WITH THE LIGHT
Synchronized Shielding Plate

REDUCED LIGHT LEAKAGE
Synchronized Shielding Plate

FLEXIBLE AIMING
Adjustable Tilt
350° Rotation

ONE PLATFORM. MULTIPLE OPTIONS.
Trim / Trimless


Artdon
Innovation Expertise Solutions


FLEXI
RECESSED DOWNLIGHT














Model	52.05535	52.07529	52.10029
Cut-Out Size	Ø55mm	Ø75mm	Ø100mm
Dimensions	Ø65*93mm	Ø81*112mm	Ø110*142mm
Power	9W 36V 200mA	15W 36V 350mA	28W 36V 700mA
Luminous flux	3000K 620lm	3000K 1528lm	3000K 3021lm
Adjustability	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	15°/23°/35°/51°	19°/30°/42°/51°	25°/32°/44°/52°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Commercial	Retail / Commercial	Retail / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Flexible adjustable lighting for retail and commercial interiors where clean ceiling integration and controlled aiming matter.

SHOPPING MALLS
Retail Corridors, Common Areas

FASHION RETAIL
Boutiques, Apparel, Display Areas

HOTEL LOBBIES
Lobbies, Lounges, Public Areas

COMMERCIAL INTERIORS
Retail Spaces, Public Areas









FLEXI
ADJUSTABLE RECESSED DOWNLIGHT

FLEXI is designed to keep light controlled even when the luminaire is tilted.

Its synchronized shielding plate moves together with the adjustable lighting module, continuously covering the exposed opening as the beam is redirected. This helps reduce unwanted light leakage and keeps the ceiling visually clean at different aiming angles.

Combined with flexible rotation, multiple sizes and interchangeable optical components, FLEXI delivers directional lighting without sacrificing a refined recessed appearance.



SHIELDING THAT MOVES WITH THE LIGHT
Synchronized Shielding Plate

CENTER-POINT AIMING
Beam Stays Centered During Adjustment

FLEXIBLE AIMING
Adjustable Tilt
350° Rotation

ONE PLATFORM. MULTIPLE OPTIONS.
Trim / Trimless


Artdon
Innovation Expertise Solutions


FLEXI
RECESSED DOWNLIGHT















Model	57.05518	57.07503	57.10012
Cut-Out Size	Ø55mm	Ø75mm	Ø100mm
Dimensions	Ø54*96mm	Ø74*112mm	Ø98*142mm
Power	9W 36V 200mA	15W 36V 350mA	28W 36V 700mA
Luminous flux	3000K 620lm	3000K 1528lm	3000K 3021lm
Adjustability	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	15°/23°/35°/51°	19°/30°/42°/51°	25°/32°/44°/52°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Hotel / Gallery	Retail / Hotel / Gallery	Retail / Hotel / Gallery

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Flexible adjustable lighting for retail, lifestyle and residential interiors.

FASHION RETAIL
Boutiques, Apparel Displays



LIFESTYLE RETAIL
Accessories, Product Displays, Boutiques



RESIDENTIAL LIVING
Living Rooms, Lounges, Private Residences



BOOKSTORES & READING
Bookstores, Libraries, Reading Areas



FLEXI
LOW-GLARE RECESSED DOWNLIGHT

FLEXI is developed for comfortable architectural lighting with a clean and stable ceiling appearance.

Its fixed optical design provides low-glare illumination for general lighting applications, making it ideal for hospitality, residential and commercial interiors where visual comfort matters every day.

Available in three sizes, FLEXI Fixed creates a consistent lighting language across the project while adapting to different room scales and lighting needs.

LOW GLARE, HIGH COMFORT
Controlled Optical Design

STABLE BY DESIGN
Fixed Optical Module

EVERYDAY ARCHITECTURAL LIGHT
Ideal for Base Lighting


THREE SIZES. ONE LANGUAGE.
Ø55 / Ø75 / Ø100 Cut-Out

Artdon
Innovation&Expertise&Solutions

FLEXI
RECESSED DOWNLIGHT


51.05521






51.07525





51.10012





Model	**51.05521**	**51.07525**	**51.10012**
Cut-Out Size	Ø55mm	Ø75mm	Ø100mm
Dimensions	Ø65*90mm	Ø81*108mm	Ø110*133mm
Power	9W 36V 200mA	15W 36V 350mA	28W 36V 700mA
Luminous flux	3000K 647lm	3000K 1547lm	3000K 3081lm
Adjustability	Tilt --°	Tilt --°	Tilt --°
	Rotation --°	Rotation --°	Rotation --°
Beam Angle	15°/22°/37°/49°	19°/29°/40°/50°	25°/31°/42°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Hotel / Villa / Office	Hotel / Villa / Office	Hotel / Villa / Office

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Versatile lighting solutions that enhance architecture and create the right atmosphere.

LOUNGE AREAS
Seating Areas, Reception Lounges



FASHION RETAIL
Boutiques, Apparel Displays



BOOKSTORES & READING
Libraries, Reading Areas, Study Spaces



CORPORATE OFFICES
Workspaces, Office Lounges, Meeting Areas



FLEXI
LOW-GLARE RECESSED DOWNLIGHT

FLEXI Fixed is developed for comfortable architectural lighting with a clean and stable ceiling appearance.

Its fixed optical design provides low-glare illumination for general lighting applications, making it ideal for hospitality, residential and commercial interiors where visual comfort matters every day.

Available in three sizes, FLEXI Fixed creates a consistent lighting language across the project while adapting to different room scales and lighting needs.

LOW GLARE, HIGH COMFORT
Controlled Optical Design


STABLE BY DESIGN
Fixed Optical Module

EVERYDAY ARCHITECTURAL LIGHT
Ideal for Base Lighting

THREE SIZES. ONE LANGUAGE.
Ø55 / Ø75 / Ø100 Cut-Out


Artdon


FLEXI
RECESSED DOWNLIGHT














Model	60.05511	60.07511	60.10011
Cut-Out Size	Ø55mm	Ø75mm	Ø100mm
Dimensions	Ø54*88mm	Ø74*112mm	Ø98*133mm
Power	9W 36V 200mA	15W 36V 350mA	28W 36V 700mA
Luminous flux	3000K 647lm	3000K 1547lm	3000K 3081lm
Adjustability	Tilt --° Rotation --°	Tilt --° Rotation --°	Tilt --° Rotation --°
Beam Angle	15°/22°/37°/49°	19°/29°/40°/50°	25°/31°/42°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Hospitality / Commercial	Hospitality / Commercial	Hospitality / Commercial

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Low-glare general lighting for hospitality and commercial interiors where visual comfort matters.

LOUNGE AREAS
Seating Areas, Reception Lounges



LOBBIES & CORRIDORS
Reception Areas, Circulation Spaces



HOSPITALITY
Hotel Lobbies, Lounges, Public Areas



COMMERCIAL SPACES
Malls, Shared Areas, Public Interiors



VOLI
RECESSED DOWNLIGHT

VOLI is a deep-recessed indoor downlight family designed for refined residential, hospitality, retail and commercial interiors.
The recessed optical structure helps reduce direct glare while maintaining a clean ceiling appearance, with Ø75 mm and Ø95 mm options for general, accent and vertical illumination.

DEEP-RECESSED OPTICS
Reduced Direct Glare
Comfortable Illumination

VISUAL COMFORT
Shielded Light Source
Clean Ceiling Appearance

FLEXIBLE LIGHTING
General · Accent · Vertical
Multiple Beam Angles

TWO SIZES
Ø75 / Ø95 Cut-Out
14W / 25W

Artdon
Innovation Expertise Solutions


VOLI
RECESSED DOWNLIGHT


52.07531



52.09535







Model	**52.07531**	**52.09535**
Cut-Out Size	Ø75mm	Ø95mm
Dimensions	Ø82*97mm	Ø103*112mm
Power	14W 36V 350mA	25W 36V 600mA
Luminous flux	3000K 1547lm	3000K 3082lm
Adjustability	Tilt 23° Rotation 350°	Tilt 23° Rotation 350°
Beam Angle	19°/29°/40°/50°	25°/31°/42°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Hospitality / Gallery	Hospitality / Gallery

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Comfortable recessed lighting for hospitality, galleries and refined public interiors.


ART GALLERIES
Art Displays, Exhibition Areas




HOTEL LOBBIES
Lobbies, Corridors, Reception Areas



EXHIBITION SPACES
Displays, Cultural Interiors



MUSEUMS & GALLERIES
Museums, Art Walls, Exhibition Halls



WALLI
ADJUSTABLE WALL-WASH DOWNLIGHT

WALLI is an adjustable recessed wall-wash downlight designed for smooth, controlled vertical illumination.

Its asymmetric optical system directs light efficiently onto the wall, creating a clean and continuous linear wash with reduced dark zones.

With adjustable aiming, multiple sizes and power options, WALLI adapts easily to different wall heights, setback distances and architectural applications.

WALLI
ADJUSTABLE WALL-WASH DOWNLIGHT

WALLI is an adjustable recessed wall-wash downlight designed for smooth, controlled vertical illumination.

Its asymmetric optical system directs light efficiently onto the wall, creating a clean and continuous linear wash with reduced dark zones.

With adjustable aiming, multiple sizes and power options, WALLI adapts easily to different wall heights, setback distances and architectural applications.

ASYMMETRIC WALL WASH
Controlled Light on Vertical Surfaces

LINEAR LIGHT DISTRIBUTION
Clean, Continuous Wall Illumination

ADJUSTABLE AIMING
Flexible Angle for Precise Wall Coverage


THREE SIZES
Ø65 / Ø85/ Ø105 Cut-Out
12W / 20W / 30W

Artdon
Innovation Expertise Solutions

WALLI
WALL-WASH DOWNLIGHT


52.06520






52.08529





52.10513





Model	**52.06520**	**52.08529**	**52.10513**
Cut-Out Size	Ø65mm	Ø85mm	Ø105mm
Dimensions	Ø74*79mm	Ø93*85mm	Ø113*104mm
Power	12W 36V 300mA	20W 36V 500mA	30W 36V 700mA
Luminous flux	3000K 511lm	3000K 1366lm	3000K 1707lm
Adjustability	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	ww Tilted 18° Beam 48°	ww Tilted 25° Beam 51°	ww Tilted 20° Beam 40°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Gallery / Hotel	Gallery / Hotel	Gallery / Hotel


OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Adjustable wall-wash lighting for architectural walls, artworks and display surfaces requiring smooth, continuous vertical illumination.


ART & FEATURE WALLS
Paintings, Feature Walls, Decorative Surfaces



HOSPITALITY INTERIORS
Hotel Lobbies, Corridors, Lounge Areas



ARCHITECTURAL WALLS
Corridors, Textured Walls, Vertical Surfaces



GALLERIES & EXHIBITIONS
Artworks, Exhibition Walls, Display Areas



VORA
DEEP-RECESSED ADJUSTABLE DOWNLIGHT

Deep-recessed adjustable lighting designed for precise aiming with a quiet ceiling presence.

DEEP-RECESSED OPTICS
Reduced Direct Glare

ADJUSTABLE AIMING
30° Tilt / 350° Rotation

CLEAN CEILING PRESENCE
Discreet Architectural Integration

TWO SIZES
Ø55 / Ø75 Cut-Out


VORA
RECESSED DOWNLIGHT


52.05558



52.07546







Model	**52.05558**	**52.07546**
Cut-Out Size	Ø55mm	Ø75mm
Dimensions	Ø60*66mm	Ø80*78mm
Power	6W 36V 150mA	10W 36V 250mA
Luminous flux	3000K 452lm	3000K 810lm
Adjustability	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°
Beam Angle	17°/23°/35°/48°	13°/24°/35°/54°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Retail / Hospitality	Retail / Hospitality

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Comfortable adjustable lighting for retail, hospitality and gallery interiors.

RETAIL SPACES
Boutiques, Showrooms, Display Areas




FASHION & WARDROBE
Apparel, Closets, Display Shelving



HOSPITALITY
Hotel Rooms, Lounges, Corridors



GALLERIES & ART
Artworks, Feature Walls, Exhibitions



HICORE

HIGH POWER FOR GREATER HEIGHTS

High-output recessed lighting for large, high-ceiling spaces.



40W **60W** **80W**

For demanding commercial and architectural spaces.

Artdon
Innovation Expertise Solutions

ENGINEERED FOR HIGH-POWER INSTALLATIONS

Efficient cooling, secure mounting and added safety for demanding projects.



01

COLD-FORGED HEAT SINK


Efficient Thermal Management



02

Z-TYPE CEILING CLIPS


Strong, Secure Mounting

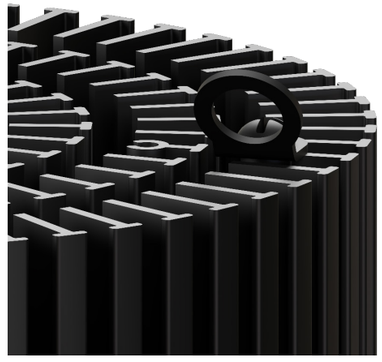

03

SAFETY TETHER

Secondary Fall Protection
For Added Security

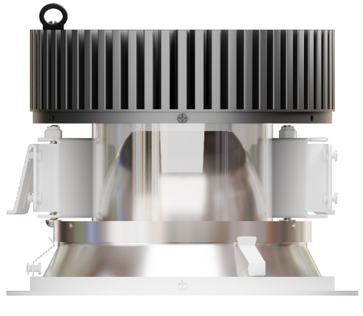

04

DUAL REFLECTOR SYSTEM

Alanod Aluminum Reflector
Anti-Glare Aluminum Reflector

HICORE
RECESSED DOWNLIGHT

HICORE is a high-power recessed downlight family designed for high ceilings and large architectural spaces.
Delivering up to 80W and over 9,000 lm, it provides powerful, efficient illumination for demanding commercial and public environments.

HIGH POWER
40W · 60W · 80W
For Demanding Spaces

HIGH OUTPUT
Up to 9,000+ lm
For High Ceilings

MULTIPLE BEAM ANGLES
From Accent to Wide Beam
Flexible Light Distribution


HEAVY-DUTY DESIGN
Full Aluminium Body
Built for Large Projects

Artdon
Innovation Expertise Solutions

HICORE
RECESSED DOWNLIGHT


51.11011






51.13511





51.16011





Model	**51.11011**	**51.13511**	**51.16011**
Cut-Out Size	Ø110mm	Ø135mm	Ø160mm
Dimensions	Ø123*110mm	Ø150*124mm	Ø176*168mm
Power	40W 36V 1050mA	60W 36V 1500mA	80W 36V 2100mA
Luminous flux	3000K 4769lm	3000K 7546lm	3000K 9122lm
Adjustability	Tilt --°	Tilt --°	Tilt --°
	Rotation --°	Rotation --°	Rotation --°
Beam Angle	22°/42°/60°	21°/38°/56°/66°	26°/36°/46°/70°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<17	<19	<22
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Airport / Mall / Atrium	Airport / Mall / Atrium	Airport / Mall / Atrium

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
High-output lighting solutions for large-scale and high-ceiling environments.

SHOPPING MALLS
Atriums, Retail Areas, Large Public Spaces



PUBLIC BUILDINGS
Entrance Halls, Lobbies, High-Ceiling Areas



HOSPITALITY
Hotel Lobbies, Resorts, Large Interior Spaces



TRANSPORTATION HUBS
Airports, Stations, Public Terminals



MINI
RECESSED DOWNLIGHT


MINI is an ultra-compact recessed downlight family designed for spaces where minimal ceiling presence and precise lighting are essential.
With multiple sizes and fixed or adjustable configurations, the range provides flexible beam control while maintaining a clean and discreet ceiling appearance.



MINI
RECESSED DOWNLIGHT


51.03015






51.04511





52.04512





Model	**51.03015**	**51.04511**	**52.04512**
Cut-Out Size	Ø30mm	Ø45mm	Ø45mm
Dimensions	Ø35*80mm	Ø50*81mm	Ø50*81mm
Power	6W 36V 150mA	6W 36V 150mA	6W 36V 150mA
Luminous flux	3000K 353lm	3000K 368lm	3000K 368lm
Adjustability	Tilt --°	Tilt --°	Tilt 30°
	Rotation --°	Rotation --°	Rotation 350°
Beam Angle	21°/27°/39°/57°	19°/22°/31°/46°	19°/22°/31°/46°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<18	<18	<18
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Villa / Hotel / Lounge	Villa / Hotel / Lounge	Villa / Hotel / Lounge

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass



Honeycomb Louver

APPLICATIONS
Discreet lighting solutions for refined residential interiors.

LIVING AREAS
Living Rooms, Lounges, Reception Areas



RESIDENTIAL CIRCULATION
Corridors, Stairways, Transitional Spaces



LUXURY RESIDENTIAL
Living Rooms, Dining Areas, Private Homes



BEDROOMS & SUITES
Bedrooms, Private Suites, Guest Rooms



MINI
RECESSED DOWNLIGHT

MINI is an ultra-compact recessed downlight family designed for spaces where minimal ceiling presence and precise lighting are essential.
With multiple sizes and fixed or adjustable configurations, the range provides flexible beam control while maintaining a clean and discreet ceiling appearance.




MINI
RECESSED DOWNLIGHT


51.04011



52.04018







Model	**51.04011**	**52.04018**
Cut-Out Size	Ø40mm	Ø40mm
Dimensions	Ø45*81mm	Ø45*81mm
Power	8W 36V 180mA	8W 36V 180mA
Luminous flux	3000K 471lm	3000K 471lm
Adjustability	Tilt --°	Tilt 15°
	Rotation --°	Rotation 350°
Beam Angle	18°/22°/34°/46°	18°/22°/34°/46°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<16	<16
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Villa / Hotel / Lounge	Villa / Hotel / Lounge

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Compact and precise lighting for display, reading and private lifestyle spaces.

ART & DISPLAY
Art Walls, Feature Displays, Private Collections




PRIVATE LOUNGES
Lounges, Reading Rooms, Private Libraries



STUDY & READING
Studies, Libraries, Reading Areas



MUSIC & LIFESTYLE
Music Rooms, Private Lounges, Lifestyle Spaces




MINI PRO

ONE CORE. MULTIPLE CONFIGURATIONS.

52.05526

TRIM ANTI-GLARE
Anti-Glare Reflector

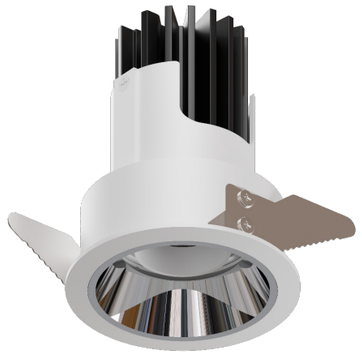



52.05527

TRIM ADJUSTABLE
Tilt & Rotation





A shared core.

One removable light engine works across all four housings, simplifying replacement and maintenance.
Available in 7W and 10W, with the same optics and mounting interface.



FOUR HOUSINGS. ONE SHARED MODULE.

Trim and trimless options for different lighting needs.
One removable light engine fits all four housings.

57.05516

TRIMLESS ADJUSTABLE
Tilt & Rotation





57.06511

TRIMLESS ANTI-GLARE
Anti-Glare Reflector





TWO POWER OPTIONS. SAME INTERFACE.



8W
Compact Heatsink



10W
Higher Output Heatsink

MINI PRO

PUSH. RELEASE. REINSTALL.



PUSH-TO-RELEASE
Quick Front Removal

FRONT MAINTENANCE MADE SIMPLE

Remove and reinstall the light engine without opening the ceiling.



PUSH-TO-LOCK
Quick Front Installation

MINI PRO
RECESSED DOWNLIGHT

MINI PRO is a compact modular recessed downlight family designed for easy front maintenance and long-term serviceability.
The push-lock system allows the lighting module to be removed and replaced from below without damaging the ceiling.

COMPACT DESIGN
Small Aperture
Clean Ceiling Integration

PUSH-LOCK SYSTEM
Quick Module Release
Front Access


EASY MAINTENANCE
Replaceable Module
Without Ceiling Damage

FLEXIBLE CONFIGURATION
Multiple Sizes
Adjustable Options

MINI PRO
RECESSED DOWNLIGHT


52.05526






52.05527






57.05516





57.06511





Model	**52.05526**	**52.05527**	**57.05516**	**57.06511**
Cut-Out Size	Ø55mm	Ø55mm	Ø55mm	Ø65mm
Dimensions	Ø61*78mm	Ø61*78mm	Ø89*69mm	Ø95*78mm
Power	8W 36V 180mA	8W 36V 180mA	8W 36V 180mA	8W 36V 180mA
Luminous flux	3000K 627lm	3000K 684lm	3000K 547lm	3000K 627lm
Adjustability	Tilt 30° Rotation 350°	Tilt 30° Rotation 350°	Tilt 20° Rotation 350°	Tilt 30° Rotation 350°
Beam Angle	17°/23°/34°/55°	17°/23°/34°/55°	17°/23°/34°/50°	18°/23°/34°/55°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90	CRI 90
UGR	<9	<9	<19	<9
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20	IP20
Best for	Hotel / Apartment / Corridor	Hotel / Apartment / Corridor	Hotel / Apartment / Corridor	Hotel / Apartment / Corridor

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens



Textured Glass


Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Compact modular lighting for residential and hospitality spaces where easy maintenance matters.

LIVING AREAS
Living Rooms, Lounges, Private Residences



BEDROOMS & SUITES
Bedrooms, Hotel Rooms, Private Suites



CORRIDORS & ART WALLS
Corridors, Hallways, Transitional Spaces



DINING AREAS
Dining Rooms, Restaurants, Hospitality Spaces



MINI PRO
RECESSED DOWNLIGHT

MINI PRO is a compact modular recessed downlight family designed for easy front maintenance and long-term serviceability.
The push-lock system allows the lighting module to be removed and replaced from below without damaging the ceiling.



COMPACT DESIGN
Small Aperture
Clean Ceiling
Integration

PUSH-LOCK SYSTEM
Quick Module Release
Front Access

EASY MAINTENANCE
Replaceable Module
Without Ceiling
Damage

FLEXIBLE
CONFIGURATION
Multiple Sizes
Adjustable Options

Artdon


MINI PRO
RECESSED DOWNLIGHT


51.03823



51.03825







Model	**51.03823**	**51.03825**
Cut-Out Size	Ø38mm	Ø38mm
Dimensions	Ø43*77mm	Ø43*77mm
Power	8W 36V 180mA	8W 36V 180mA
Luminous flux	3000K 608lm	3000K 608lm
Adjustability	Tilt --°	Tilt --°
	Rotation --°	Rotation --°
Beam Angle	18°/23°/32°/45°	18°/23°/32°/45°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<18	<18
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Hotel / Apartment / Corridor	Hotel / Apartment / Corridor

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Service-friendly lighting for refined interiors requiring long-term flexibility.

LIVING AREAS
Living Rooms, Lounges, Private Residences



RESIDENTIAL INTERIORS
Living Areas, Home Offices, Private Homes



LIVING & DINING
Living Rooms, Dining Areas, Open-Plan Spaces



BEDROOMS & SUITES
Bedrooms, Hotel Rooms, Private Suite



SHOWLITE
RECESSED CABINET LIGHT

SHOWLITE is a recessed cabinet lighting family developed for thicker shelves and minimalist display environments.
The series includes three different lighting configurations, offering flush, adjustable and pull-out solutions to suit different display and aiming requirements.

MINIMAL INTEGRATION
Designed for Thicker Shelves
Clean Recessed Appearance

THREE CONFIGURATIONS
Flush / Adjustable / Pull-Out
Choose for Different Applications

PRECISE AIMING
Directional Light Control
For Focused Display Lighting


DISPLAY FLEXIBILITY
Different Structures
For Different Display Needs

Artdon
Innovation Expertise Solutions

SHOWLITE
RECESSED CABINET LIGHT


52.04525






52.04526





52.05013






Model	**52.04525**	**52.04526**	**52.05013**
Cut-Out Size	Ø45mm	Ø45mm	Ø50mm
Dimensions	Ø52*40mm	Ø52*32mm	Ø55*31mm
Power	4W 12V 250mA	4W 12V 250mA	4W 12V 250mA
Luminous flux	3000K 285lm	3000K 278lm	3000K 301lm
Adjustability	Tilt 18° Rotation 350°	Tilt 18° Rotation 350°	Tilt 65° Rotation 350°
Beam Angle	20°/23°/28°/40°	19°/23°/28°/46°	28°/35°/38°/53°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<15	<14	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Cabinet / Retail / Display	Cabinet / Retail / Display	Cabinet / Retail / Display

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Flexible accent lighting for premium cabinets, shelving and minimalist display spaces.

LUXURY RETAIL
Boutiques, Fashion, Premium Displays



FOOTWEAR DISPLAY
Shoes, Accessories, Retail Shelving



COLLECTION DISPLAY
Art Objects, Collectibles, Display Cabinets



FASHION DISPLAY
Accessories, Clothing, Boutique Shelving



SHOWLITE
RECESSED CABINET WALL WASHER

SHOWLITE Wallwasher is designed for cabinet and display lighting where light needs to be directed toward vertical surfaces rather than straight down. Available in two sizes, the asymmetric optics deliver controlled illumination across display surfaces while keeping the luminaire discreetly integrated into the shelf.

ASYMMETRIC OPTICS
Wallwashing Light Distribution For Vertical Displays

TWO COMPACT SIZES
Ø30 / Ø50 Cut-Out For Different Shelf Designs

CONTROLLED LIGHT
Directs Light Toward Displays Instead of Straight Down

CLEAN INTEGRATION
Recessed Installation Minimal Visual Presence

Artdon
Innovation · Expertise · Solutions


SHOWLITE
RECESSED CABINET WALL WASHER


51.03027



51.05013







Model	**51.03027**	**51.05013**
Cut-Out Size	Ø30mm	Ø50mm
Dimensions	Ø36*35mm	Ø55*64mm
Power	4W 12V 250mA	9W 36V 200mA
Luminous flux	3000K 150lm	3000K 425lm
Adjustability	Tilt --°	Tilt --°
	Rotation --°	Rotation --°
Beam Angle	ww Tilted 10° Beam 45°	ww Tilted 10° Beam 48°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90
UGR	<17	<26
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20
Best for	Cabinet / Retail / Display	Cabinet / Retail / Display

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Asymmetric cabinet lighting for uniform illumination of vertical display surfaces.

JEWELLERY DISPLAY
Jewellery, Watches, Showcase Displays




FASHION DISPLAY
Handbags, Accessories, Boutique Shelving



FOOTWEAR DISPLAY
Shoes, Accessories, Retail Shelving



COLLECTION DISPLAY
Art Objects, Collectibles, Display Cabinets



ULTRA-SLIM
RECESSED CABINET LIGHT

Ultra-slim recessed lighting designed for shelves, cabinets and display furniture with limited installation depth.
With a total height of only 17 mm, ULTRA-SLIM integrates discreetly into slim panels while delivering precise accent lighting with minimal visual presence.

ULTRA-SLIM PROFILE
Only 17 mm Total Height
For Slim Shelves & Panels

COMPACT APERTURE
Ø35 mm Cut-Out
Minimal Visual Presence

PRECISION OPTICS
Multiple Beam Angles
Controlled Accent Lighting

FLEXIBLE AIMING
Fixed / 15° / 25° Adjustable
For Different Display Needs

Artdon
Innovation Expertise Solutions

ULTRA-SLIM
RECESSED CABINET LIGHT

51.03520





52.03525




52.03526









Model	**51.03520**	**52.03525**	**52.03526**
Cut-Out Size	Ø35mm	Ø35mm	Ø35mm
Dimensions	Ø40*17mm	Ø40*17mm	Ø40*17mm
Power	3W 12V 150mA	3W 12V 150mA	3W 12V 150mA
Luminous flux	3000K 106lm	3000K 129lm	3000K 129lm
Adjustability	Tilt --° Rotation --°	Tilt 15° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	19°/23°/29°/53°	18°/27°/31°/52°	18°/26°/30°/52°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Cabinet / Shelf / Display	Cabinet / Shelf / Display	Cabinet / Shelf / Display

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.

APPLICATIONS
Ultra-slim accent lighting for cabinets, shelves and premium display furniture.

FASHION DISPLAY
Accessories, Clothing, Boutique Shelving



JEWELLERY DISPLAY
Jewellery, Watches, Luxury Showcases



FOOTWEAR DISPLAY
Shoes, Accessories, Retail Shelving



COLLECTION DISPLAY
Art Objects, Collectibles, Display Cabinets



ORBI
MODULAR MULTI-HEAD RECESSED SPOTLIGHT



ORBI turns one recessed ceiling point into multiple independently controlled beams.

Its removable lighting modules can be individually tilted and rotated, allowing each head to aim at a different object or display area while keeping the ceiling installation compact and organized.

Available in single, twin and four-head configurations, ORBI is ideal for jewellery, showcases and premium retail spaces where several precise accents are needed within a limited ceiling area.

ONE POINT. MULTIPLE BEAMS.
Single / Twin / Four Heads

AIM EACH LIGHT INDEPENDENTLY
45° Tilt / 350° Rotation

REMOVE. REPLACE. RECONFIGURE.
Independent Lighting Modules

BUILT FOR DENSE DISPLAYS
Jewellery / Showcases / Retail

Artdon
Innovation Expertise Solutions

ORBI
RECESSED DOWNLIGHT

55.03525





55.03526




55.03527









Model	**55.03525**	**55.03526**	**55.03527**
Cut-Out Size	Ø35mm	75*35mm	155*35mm
Dimensions	Ø43*59mm	83*43*59mm	163*43*59mm
Power	4W 12V 250mA	2*4W 12V 250mA	4*4W 12V 250mA
Luminous flux	3000K 301lm	3000K 2*301lm	3000K 4*301lm
Adjustability	Tilt 45°	Tilt 45°	Tilt 45°
	Rotation 350°	Rotation 350°	Rotation 350°
Beam Angle	28°/35°/38°/53°	28°/35°/38°/53°	28°/35°/38°/53°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<19	<19	<19
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Villa / Hotel	Retail / Villa / Hotel	Retail / Villa / Hotel

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.



Protective Glass



Linear Spread Lens



Textured Glass



Honeycomb Louver



CCT Selector Switch

APPLICATIONS
Multi-head accent lighting for jewellery, beauty and premium retail displays.

JEWELLERY RETAIL
Jewellery Counters, Display Cases, Precious Goods



BEAUTY & COSMETICS
Cosmetics, Skincare, Product Displays



EYEWEAR & ACCESSORIES
Optical Stores, Accessories, Display Shelves



PREMIUM RETAIL
Boutiques, Product Showcases, Feature Displays



INTERO E
RECESSED DOWNLIGHT

INTERO E is a recessed downlight family designed for high-output accent lighting in large retail, automotive and commercial spaces.

Deep reflector optics deliver visual comfort, precise beam control and high colour rendering.

PRECISION OPTICS
Multiple Beam Angles
Precise Light Control

VISUAL COMFORT
Deep Anti-Glare Design
Clean Ceiling Appearance

FLEXIBLE CONFIGURATION
Multiple Sizes & Optics
Adjustable Aiming


PROJECT READY
Retail · Hospitality
Museum · Commercial

Artdon
Innovation&Expertise&Solutions

INTERO E
RECESSED DOWNLIGHT


52.05553






52.07543





52.09541





Model	**52.05553**	**52.07543**	**52.09541**
Cut-Out Size	Ø55mm	Ø75mm	Ø95mm
Dimensions	Ø61*110mm	Ø83*119mm	Ø105*141mm
Power	14W 36V 350mA	32W 36V 800mA	42W 36V 1050mA
Luminous flux	3000K 1487lm	3000K 3443lm	3000K 4536lm
Adjustability	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°	Tilt 25° Rotation 350°
Beam Angle	25°/30°/37°/48°	25°/31°/52°/56°	22°/34°/35°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	--	--	--
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Showroom / Mall	Retail / Showroom / Mall	Retail / Showroom / Mall

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
High-output adjustable lighting for retail, hospitality and automotive showrooms.

COMMERCIAL SPACES
Retail, Shopping Areas, Public Spaces



LUXURY RESIDENTIAL
Living Areas, Dining Rooms, Private Homes



HOSPITALITY
Hotel Lobbies, Corridors, Lounges



AUTOMOTIVE SHOWROOMS
Car Showrooms, Display Areas, Experience Centers



SLIM E
RECESSED DOWNLIGHT

SLIM E is a compact fixed recessed downlight family designed to deliver high output from a minimal ceiling aperture.
Its high-efficiency optical system combines strong illumination with a discreet ceiling presence, making it ideal for projects where compact dimensions and high performance are equally important.

COMPACT DESIGN
Small Ceiling Aperture
Minimal Visual Presence

HIGH OUTPUT
High Luminous Flux
from a Compact Size

PRECISION OPTICS
Multiple Beam Angles
Controlled Light Distribution


PROJECT FLEXIBILITY
Multiple Sizes & Outputs
For Different Ceiling Heights

Artdon
Innovation Expertise Solutions

SLIM E
RECESSED DOWNLIGHT


51.05528






51.07533





51.09516





Model	51.05528	51.07533	51.09516
Cut-Out Size	Ø55mm	Ø75mm	Ø95mm
Dimensions	Ø61*110mm	Ø83*128mm	Ø105*141mm
Power	14W 36V 350mA	32W 36V 800mA	42W 36V 1050mA
Luminous flux	3000K 1487lm	3000K 3443lm	3000K 4536lm
Adjustability	Tilt --° Rotation --°	Tilt --° Rotation --°	Tilt --° Rotation --°
Beam Angle	25°/30°/37°/48°	25°/31°/52°/56°	22°/34°/35°/49°
CCT	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K	2700K/3000K/3500K/4000K
CRI	CRI 90	CRI 90	CRI 90
UGR	<18	<17	<17
Dimming method	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V	TRIAC / DALI / 0-10V
IP rating	IP20	IP20	IP20
Best for	Retail / Office / Mall	Retail / Office / Mall	Retail / Office / Mall

OPTICAL ACCESSORIES
Optional components for glare control, protection and beam refinement.


Protective Glass


Linear Spread Lens


Textured Glass


Honeycomb Louver


CCT Selector Switch

APPLICATIONS
Compact high-output lighting for architectural and commercial spaces.

RETAIL SPACES
Boutiques, Showrooms, Premium Stores



GALLERIES & EXHIBITIONS
Art Galleries, Museums, Exhibition Spaces



COMMERCIAL SPACES
Shopping Malls, Lobbies, Public Areas



HOSPITALITY
Hotels, Restaurants, Premium Interiors

