

Report No.:

Test Time: 2025-09-13 15:21

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: FLEXI 白色下层杯款 36D 2025.9.13

Luminous Length (mm): -68

Voltage: 226.7 V

Power: 14.90 W

Luminous Width (mm): -68

Current: 0.109 A

Power Factor: 0.602

Photometric Results

CIE Class: Direct

Measurement Flux: 1525.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H41.5

Vertical Diffuse Angle(50%): V41.5

Luminaire Efficacy Rating (LER): 102.45

Max. Intensity: 3255.53 cd

S/MH(C0/C180): 0.70

Total Rated Lamp Lumens: 1525.8 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 3250.9 cd


Pos of Max. Intensity: H0 V1

S/MH(C90/C270): 0.70

Picture Of Luminaire



Luminous Intensity Distribution Curve

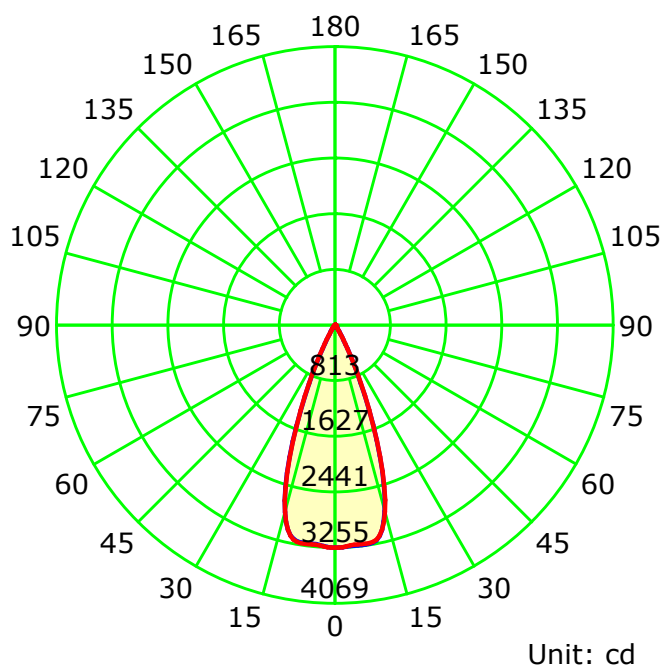

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

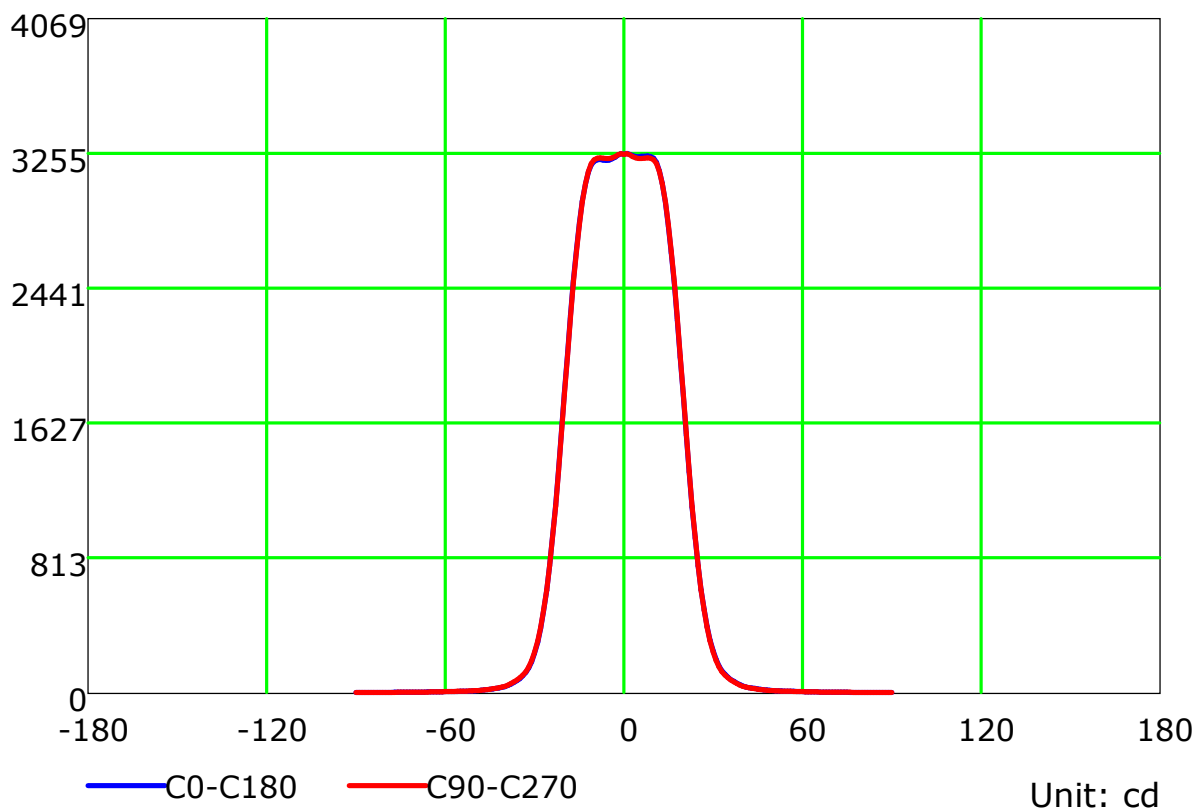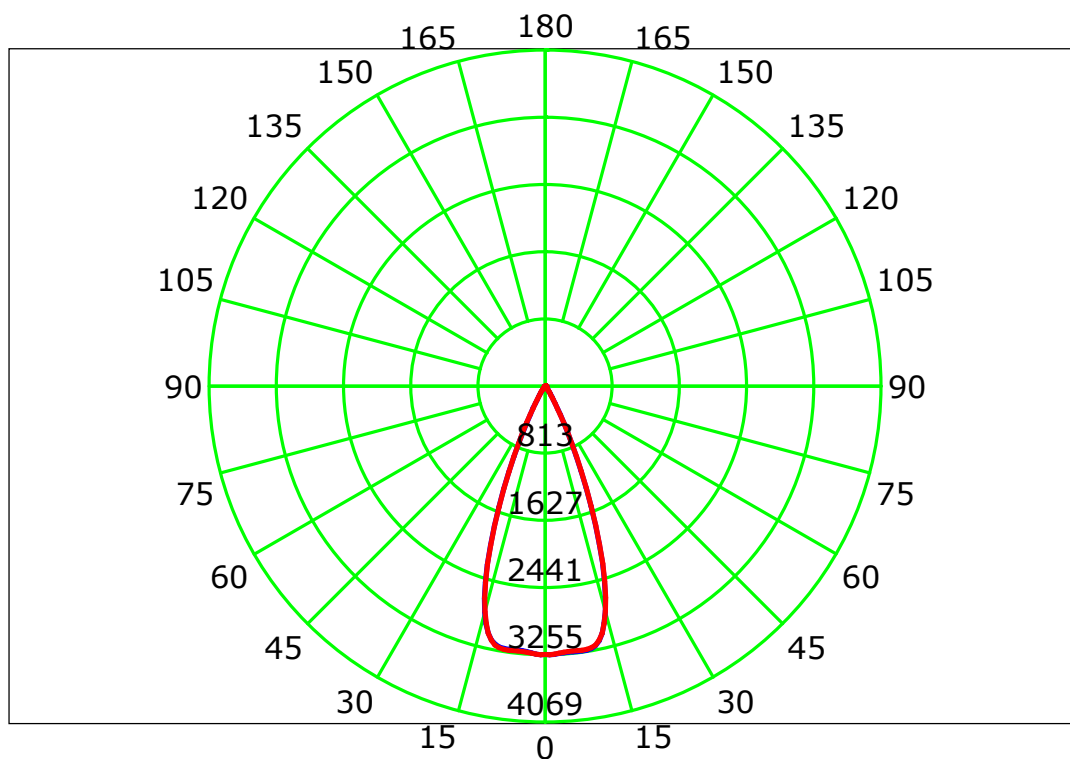


Unit: cd


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

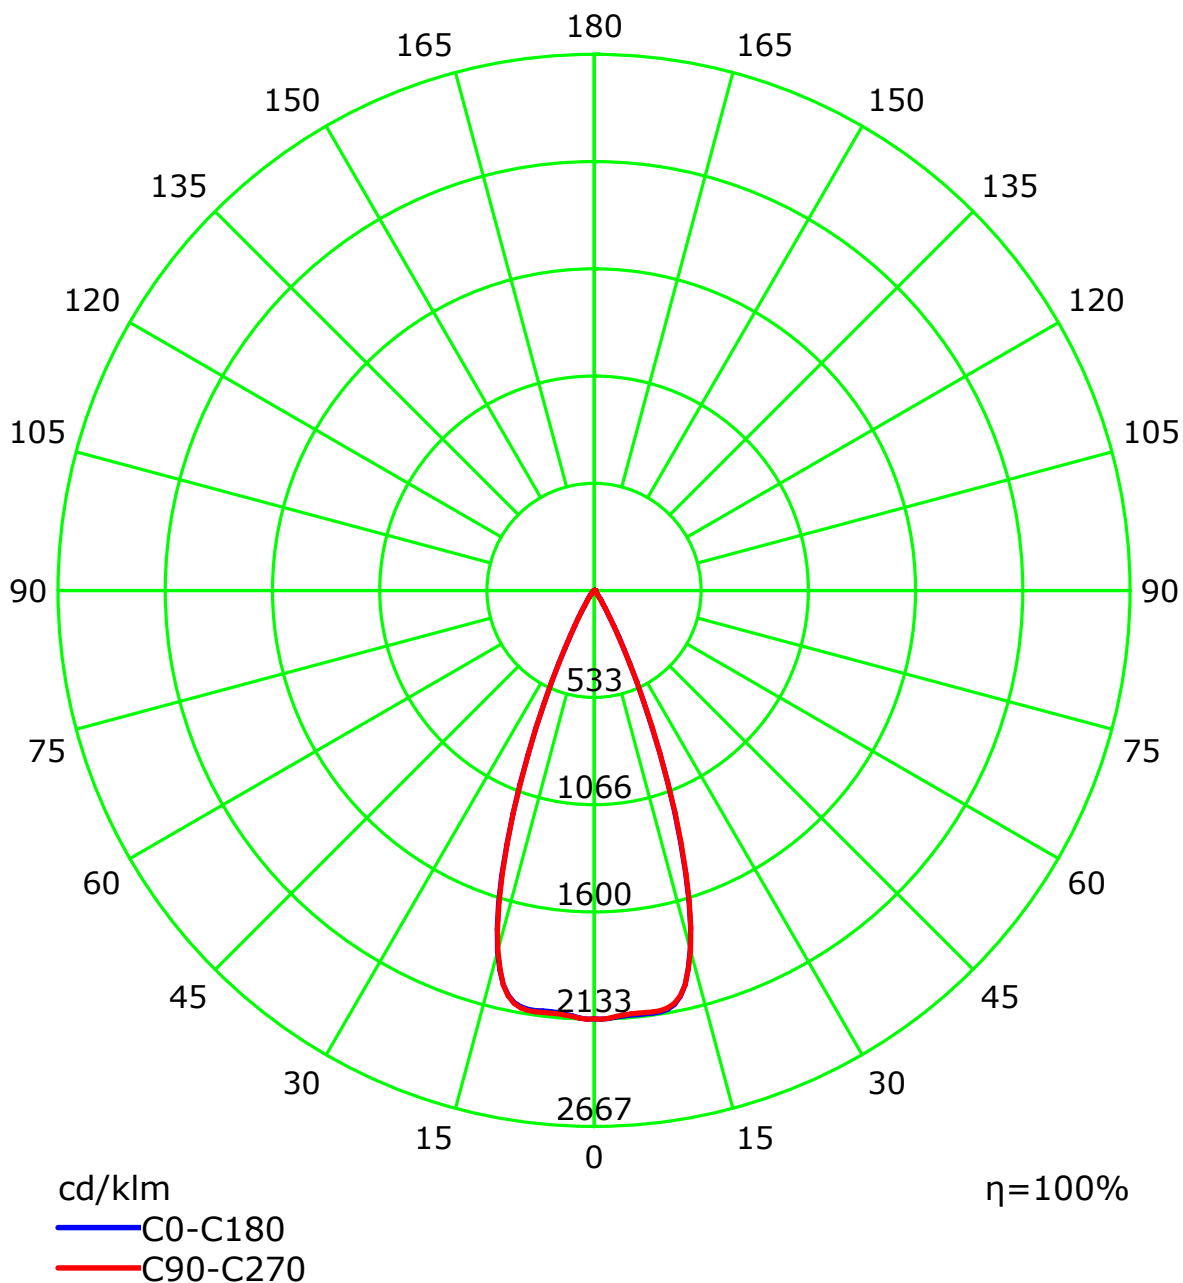

Isocandela (rectangle)

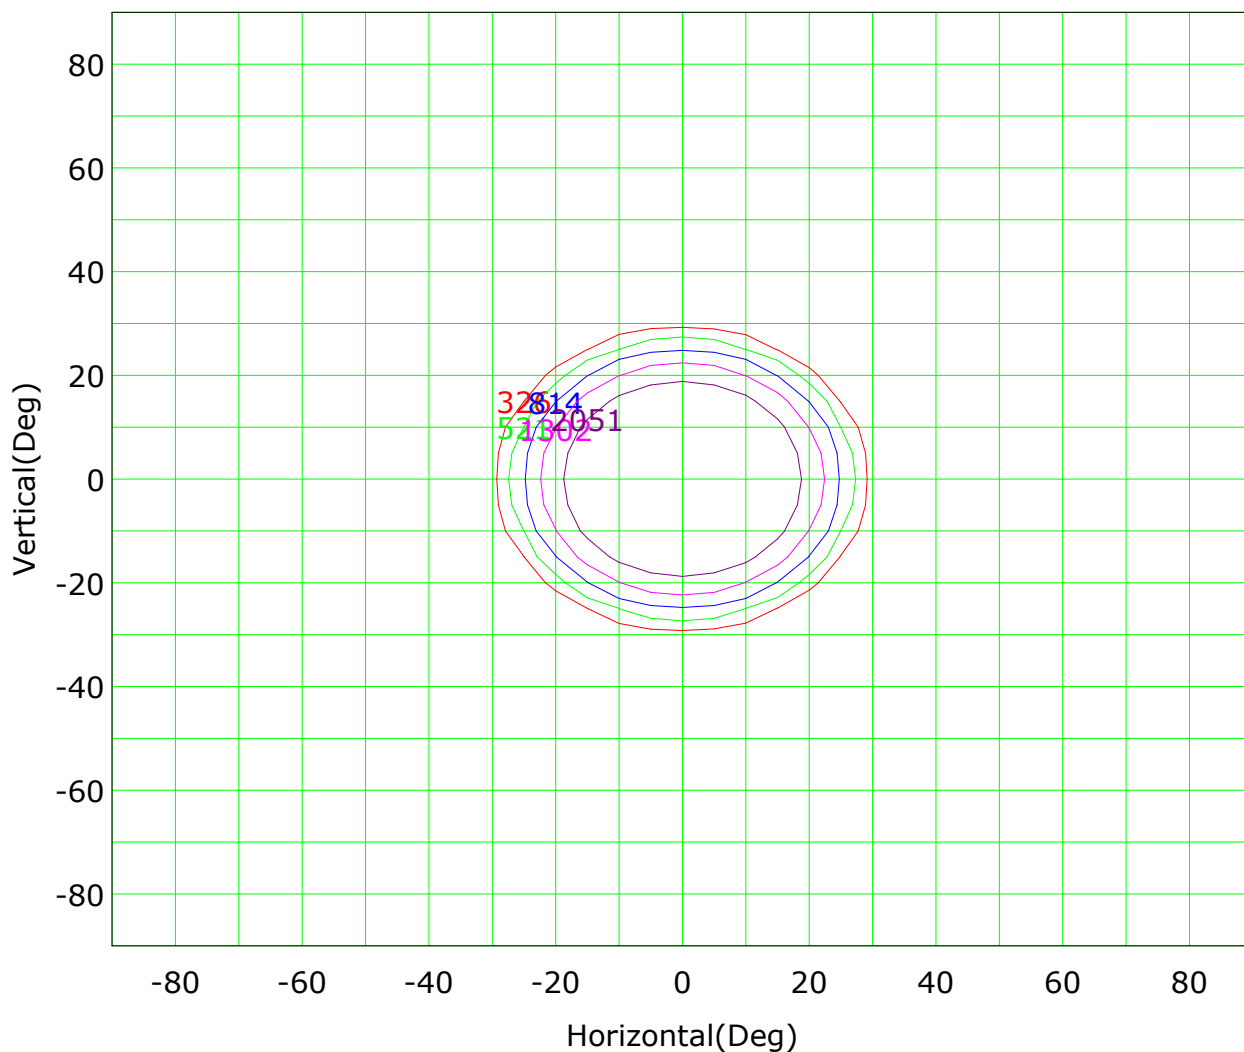

Imax (100%): 3256 cd

(10%): 326 cd	(16%): 521 cd
(25%): 814 cd	(40%): 1302 cd
(63%): 2051 cd	(100%): 3256 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

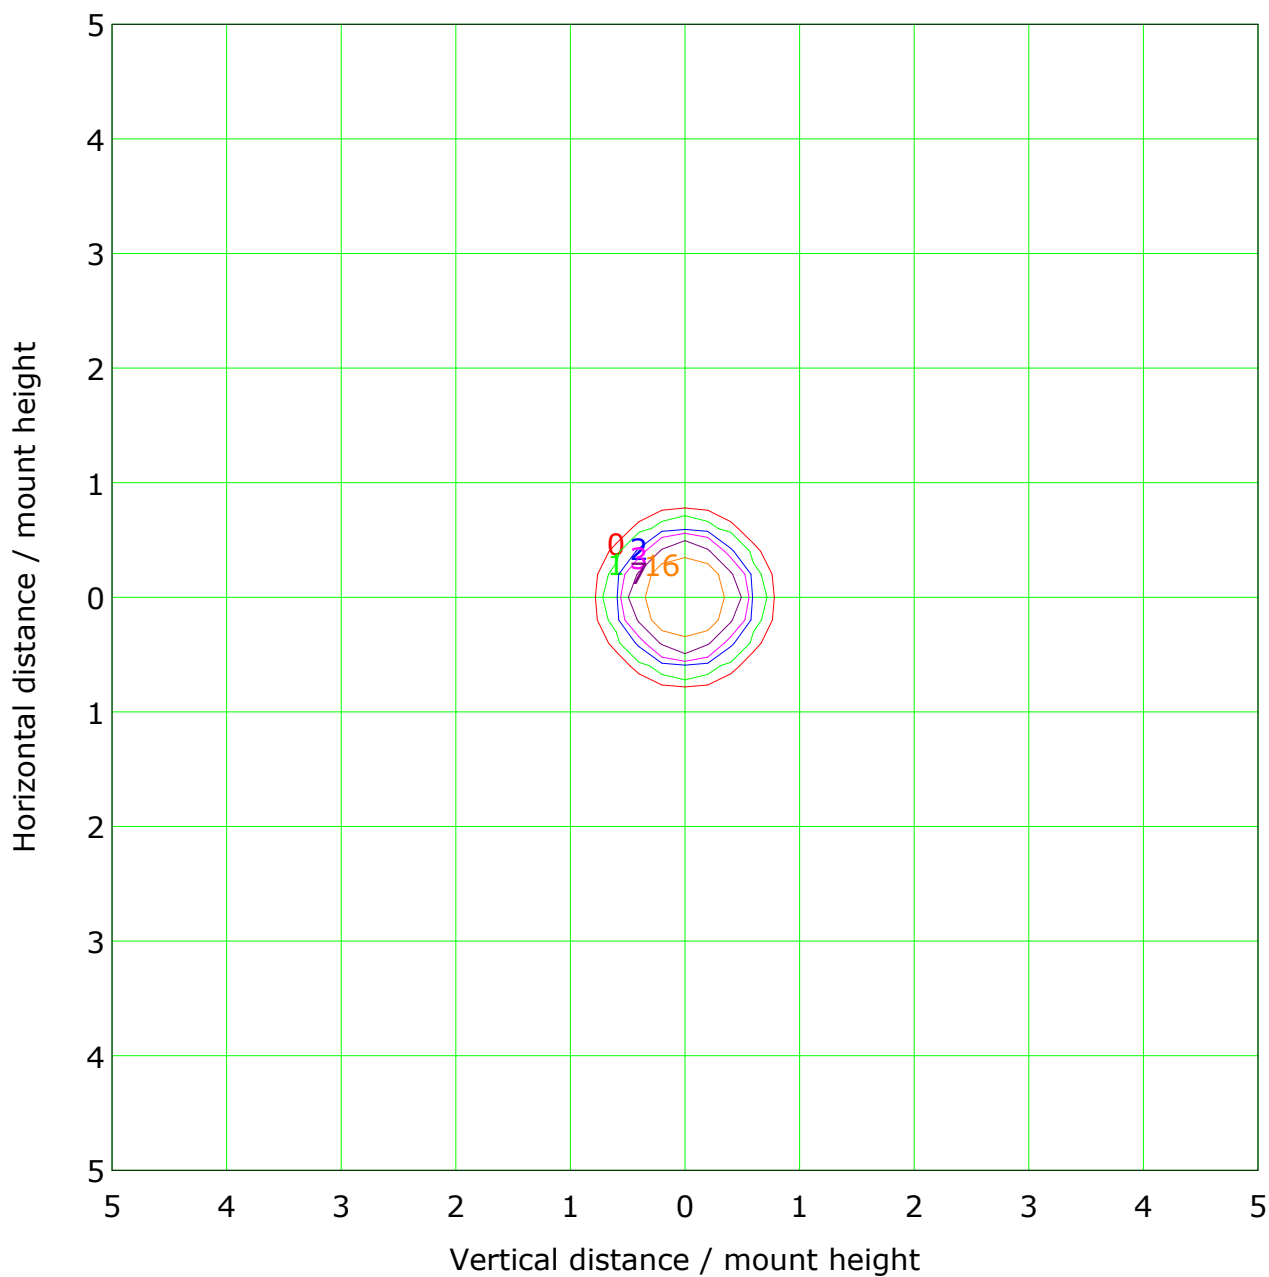


Mounting Height: 10.0m Max Lux(100%): 32.5 lx

(1%): 0.3 lx	(2%): 0.7 lx
(5%): 1.6 lx	(10%): 3.3 lx
(20%): 6.5 lx	(50%): 16.3 lx
(100%): 32.5 lx	


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Illuminance at a Distance

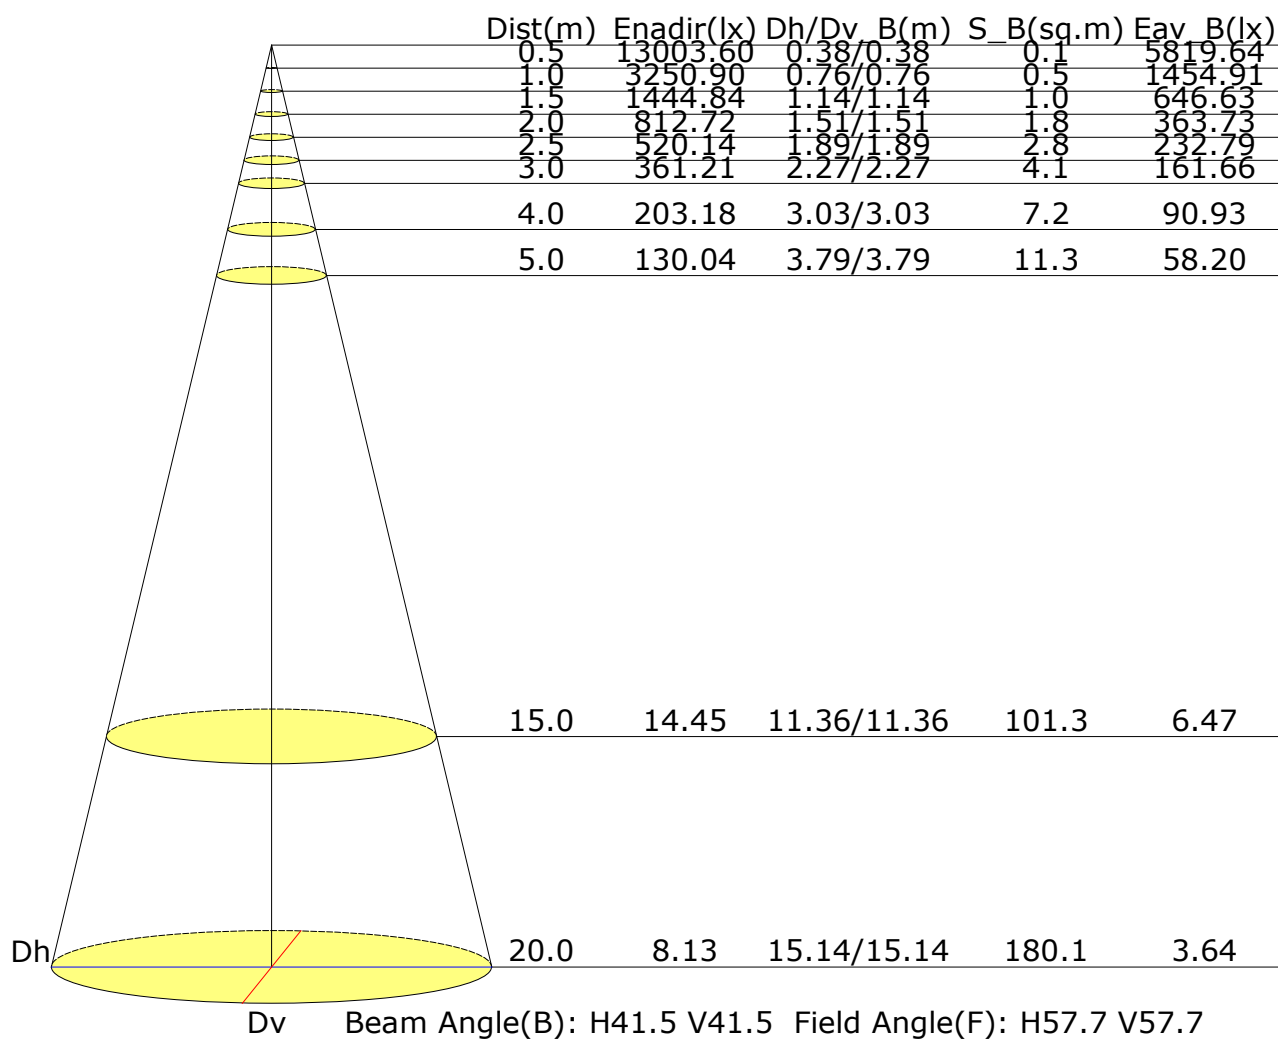

Vertical IsoLux Plot

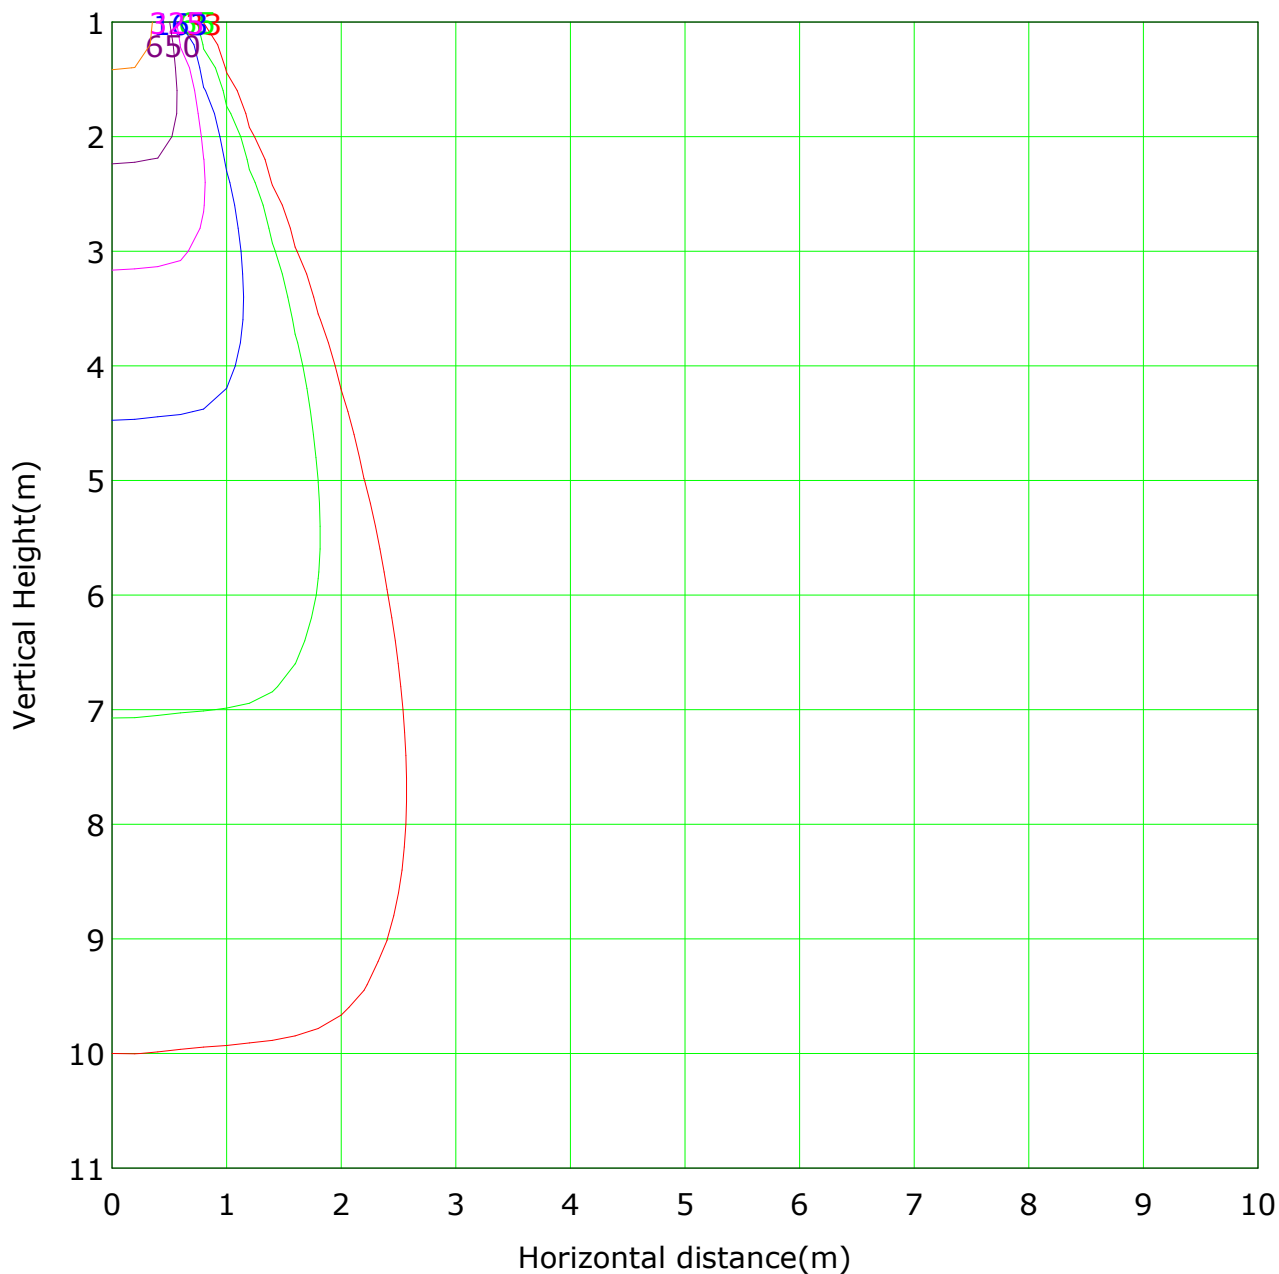


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3250.9 lx
— (1%): 32.5 lx — (2%): 65.0 lx
— (5%): 162.5 lx — (10%): 325.1 lx
— (20%): 650.2 lx — (50%): 1625.4 lx
— (100%): 3250.9 lx

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

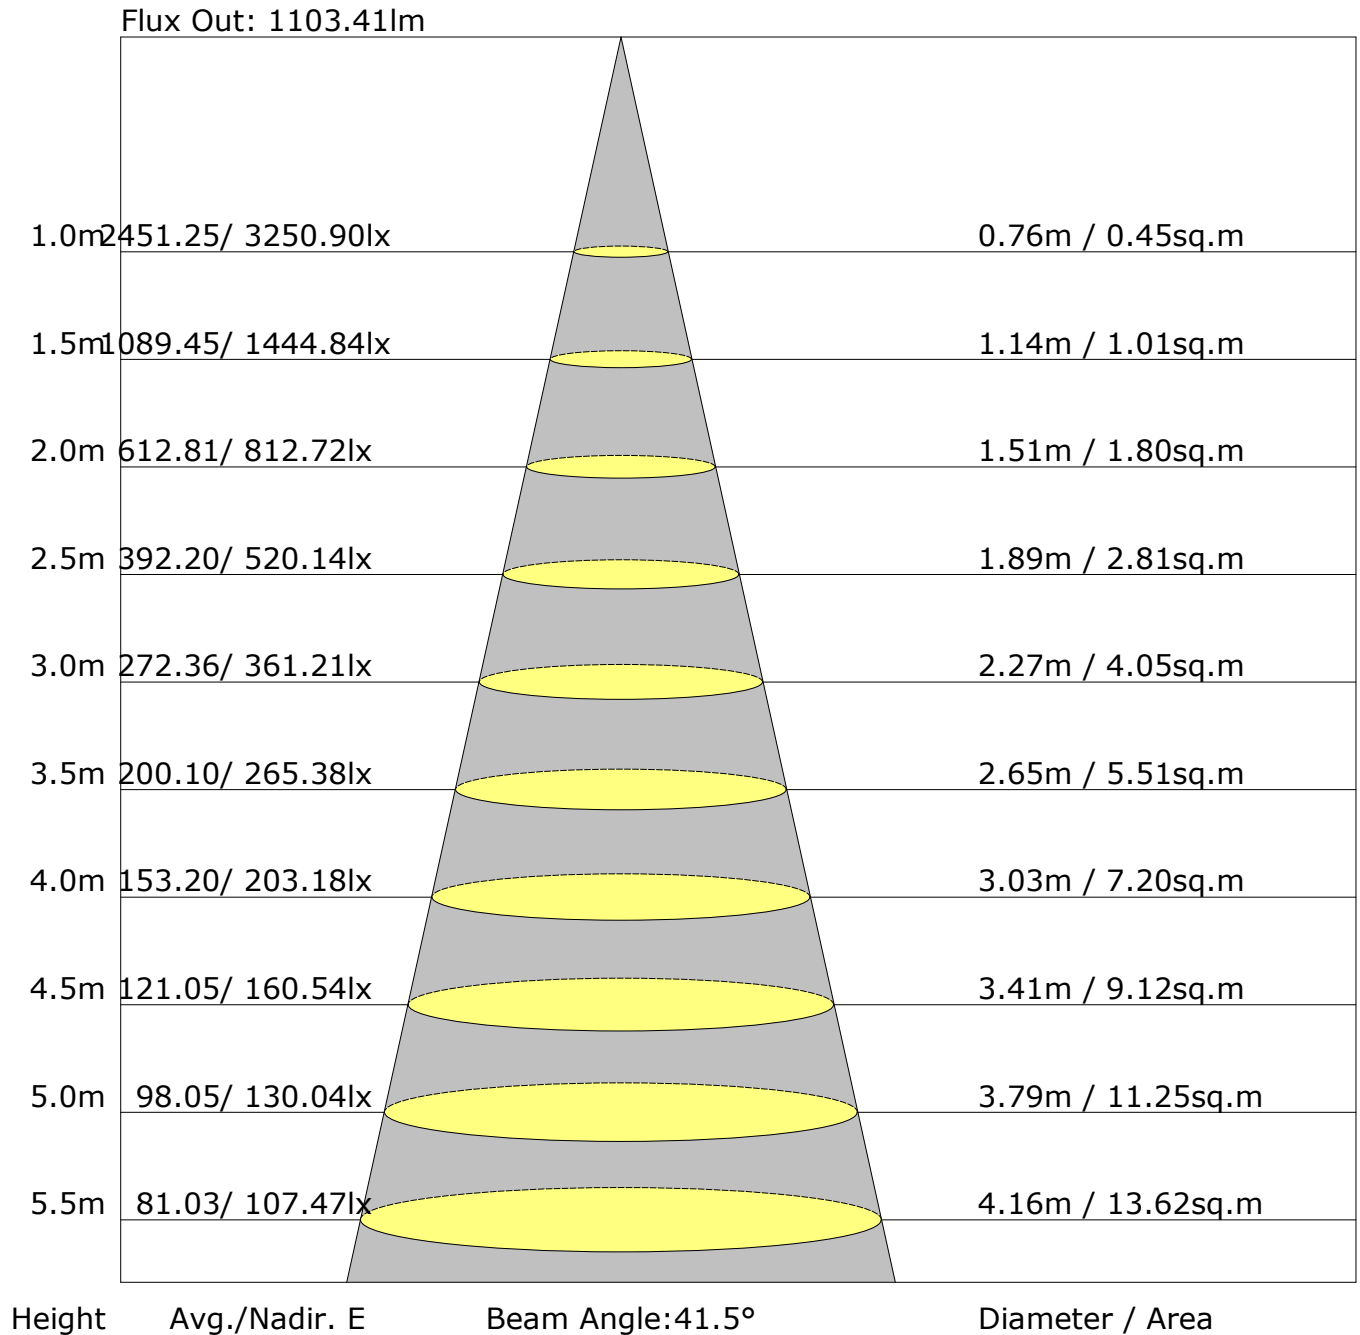

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	10.8	11.5	11.0	11.7	11.9	10.6	11.3	10.9	11.5	11.7
3H	10.8	11.5	11.1	11.7	11.9	10.7	11.3	11.0	11.6	11.8
4H	10.9	11.5	11.2	11.7	12.0	10.8	11.3	11.1	11.6	11.9
6H	10.9	11.5	11.2	11.7	12.0	10.8	11.4	11.1	11.6	11.9
8H	10.9	11.4	11.3	11.7	12.0	10.8	11.4	11.2	11.6	11.9
12H	10.9	11.4	11.3	11.7	12.0	10.9	11.4	11.2	11.7	12.0
X=4H Y=2H	10.7	11.3	11.0	11.5	11.8	10.5	11.1	10.9	11.4	11.6
3H	10.8	11.4	11.2	11.7	12.0	10.7	11.2	11.1	11.5	11.8
4H	10.9	11.4	11.3	11.7	12.1	10.8	11.3	11.2	11.6	12.0
6H	11.0	11.4	11.4	11.8	12.2	10.9	11.3	11.3	11.7	12.1
8H	11.0	11.4	11.5	11.8	12.2	11.0	11.4	11.4	11.7	12.2
12H	11.1	11.4	11.5	11.8	12.2	11.0	11.4	11.5	11.8	12.2
X=8H Y=4H	10.9	11.3	11.3	11.7	12.1	10.8	11.2	11.2	11.6	12.0
6H	11.0	11.3	11.5	11.7	12.2	11.0	11.3	11.4	11.7	12.1
8H	11.1	11.4	11.6	11.8	12.3	11.1	11.3	11.5	11.8	12.3
12H	11.2	11.4	11.7	11.9	12.4	11.2	11.4	11.7	11.9	12.4
X=12H Y=4H	10.9	11.2	11.3	11.6	12.0	10.8	11.1	11.2	11.5	11.9
6H	11.0	11.3	11.5	11.7	12.2	11.0	11.2	11.4	11.7	12.1
8H	11.1	11.3	11.6	11.8	12.3	11.1	11.3	11.6	11.8	12.3
Variations with the observer position at spacings:										
S=1.0H	+4.3/-3.5					+4.2/-3.3				
S=1.5H	+6.9/-4.2					+6.7/-3.9				
S=2.0H	+8.8/-5.0					+8.6/-4.6				

Calculate in accordance with CIE Pub.117. The table is revised with 1526lm ($8\log(F/F_0) = 1.5$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	763	50.0
	FL (0°-30°)	715	46.8
	FM (30°-60°)	45	3.0
	FH (60°-80°)	3	0.2
	FVH (80°-90°)	0	0.0
	BACK LIGHT	762	50.0
	BL (0°-30°)	715	46.9
	BM (30°-60°)	43	2.8
	BH (60°-80°)	3	0.2
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3252.8	3.1	3.1	0.20	0.20
1.0-2.0	3251.9	9.3	12.4	0.61	0.82
2.0-3.0	3243.5	15.5	28.0	1.02	1.83
3.0-4.0	3233.9	21.6	49.6	1.42	3.25
4.0-5.0	3227.7	27.8	77.4	1.82	5.07
5.0-6.0	3225.9	33.9	111.3	2.22	7.29
6.0-7.0	3226.6	40.1	151.3	2.63	9.92
7.0-8.0	3228.5	46.2	197.6	3.03	12.95
8.0-9.0	3228.8	52.3	249.9	3.43	16.38
9.0-10.0	3222.4	58.3	308.2	3.82	20.20
10.0-11.0	3205.7	64.1	372.3	4.20	24.40
11.0-12.0	3170.4	69.3	441.6	4.54	28.94
12.0-13.0	3109.4	73.8	515.4	4.84	33.78
13.0-14.0	3017.1	77.2	592.6	5.06	38.84
14.0-15.0	2894.0	79.5	672.1	5.21	44.05
15.0-16.0	2745.8	80.5	752.6	5.27	49.32
16.0-17.0	2569.4	80.0	832.6	5.24	54.57
17.0-18.0	2367.3	78.1	910.6	5.12	59.68
18.0-19.0	2147.4	74.7	985.4	4.90	64.58
19.0-20.0	1915.5	70.1	1055.5	4.60	69.17
20.0-21.0	1681.8	64.6	1120.1	4.23	73.41
21.0-22.0	1452.7	58.4	1178.5	3.83	77.23
22.0-23.0	1232.6	51.7	1230.2	3.39	80.62
23.0-24.0	1030.8	45.1	1275.3	2.95	83.58
24.0-25.0	851.2	38.7	1314.0	2.54	86.12
25.0-26.0	693.1	32.7	1346.7	2.14	88.26
26.0-27.0	557.8	27.3	1374.0	1.79	90.05
27.0-28.0	444.3	22.5	1396.5	1.47	91.52
28.0-29.0	352.0	18.4	1414.9	1.21	92.73
29.0-30.0	278.3	15.0	1429.9	0.99	93.71
30.0-31.0	219.7	12.2	1442.2	0.80	94.52
31.0-32.0	175.0	10.0	1452.2	0.66	95.17
32.0-33.0	141.7	8.4	1460.5	0.55	95.72
33.0-34.0	116.9	7.1	1467.6	0.46	96.18
34.0-35.0	97.8	6.1	1473.7	0.40	96.58
35.0-36.0	82.4	5.2	1478.9	0.34	96.93

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	69.9	4.6	1483.5	0.30	97.22
37.0-38.0	59.4	4.0	1487.5	0.26	97.48
38.0-39.0	50.3	3.4	1490.9	0.22	97.71
39.0-40.0	42.0	2.9	1493.8	0.19	97.90
40.0-41.0	35.5	2.5	1496.3	0.17	98.07
41.0-42.0	31.4	2.3	1498.6	0.15	98.22
42.0-43.0	28.4	2.1	1500.7	0.14	98.35
43.0-44.0	25.6	1.9	1502.6	0.13	98.48
44.0-45.0	22.7	1.7	1504.4	0.11	98.60
45.0-46.0	20.0	1.6	1506.0	0.10	98.70
46.0-47.0	17.6	1.4	1507.4	0.09	98.79
47.0-48.0	15.7	1.3	1508.6	0.08	98.87
48.0-49.0	14.1	1.2	1509.8	0.08	98.95
49.0-50.0	12.5	1.0	1510.8	0.07	99.02
50.0-51.0	11.4	1.0	1511.8	0.06	99.08
51.0-52.0	10.5	0.9	1512.7	0.06	99.14
52.0-53.0	9.8	0.9	1513.5	0.06	99.20
53.0-54.0	9.1	0.8	1514.3	0.05	99.25
54.0-55.0	8.5	0.8	1515.1	0.05	99.30
55.0-56.0	8.1	0.7	1515.8	0.05	99.35
56.0-57.0	7.7	0.7	1516.5	0.05	99.39
57.0-58.0	7.2	0.7	1517.2	0.04	99.43
58.0-59.0	6.6	0.6	1517.8	0.04	99.48
59.0-60.0	6.2	0.6	1518.4	0.04	99.51
60.0-61.0	5.8	0.6	1519.0	0.04	99.55
61.0-62.0	5.4	0.5	1519.5	0.03	99.58
62.0-63.0	5.1	0.5	1520.0	0.03	99.62
63.0-64.0	4.7	0.5	1520.4	0.03	99.65
64.0-65.0	4.3	0.4	1520.9	0.03	99.67
65.0-66.0	4.0	0.4	1521.3	0.03	99.70
66.0-67.0	3.7	0.4	1521.6	0.02	99.72
67.0-68.0	3.4	0.3	1522.0	0.02	99.75
68.0-69.0	3.3	0.3	1522.3	0.02	99.77
69.0-70.0	3.1	0.3	1522.6	0.02	99.79
70.0-71.0	2.9	0.3	1522.9	0.02	99.81
71.0-72.0	2.7	0.3	1523.2	0.02	99.83

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	3250.9	3250.9								
G1.0	3255.5	3253.8								
G2.0	3250.6	3247.7								
G3.0	3242.6	3233.1								
G4.0	3236.9	3222.9								
G5.0	3235.5	3215.4								
G6.0	3238.3	3214.4								
G7.0	3238.3	3215.5								
G8.0	3240.1	3219.9								
G9.0	3237.6	3217.5								
G10.0	3227.3	3207.4								
G11.0	3202.2	3186.0								
G12.0	3150.8	3142.7								
G13.0	3074.0	3070.4								
G14.0	2956.2	2967.9								
G15.0	2816.3	2835.8								
G16.0	2655.4	2675.7								
G17.0	2461.2	2485.4								
G18.0	2247.4	2275.3								
G19.0	2022.2	2044.6								
G20.0	1786.4	1808.9								
G21.0	1555.4	1576.5								
G22.0	1331.1	1347.8								
G23.0	1117.5	1133.9								
G24.0	930.3	941.5								
G25.0	765.5	767.5								
G26.0	621.8	617.6								
G27.0	499.8	492.0								
G28.0	398.6	386.8								
G29.0	317.6	305.1								
G30.0	252.3	238.3								
G31.0	201.2	187.0								
G32.0	162.2	149.6								
G33.0	133.1	121.9								
G34.0	111.2	101.3								
G35.0	93.6	85.0								
G36.0	79.0	71.9								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	67.7	60.8								
G38.0	57.8	51.5								
G39.0	48.8	43.1								
G40.0	40.4	35.5								
G41.0	34.4	31.6								
G42.0	30.9	28.7								
G43.0	28.0	25.9								
G44.0	25.5	22.9								
G45.0	22.4	20.1								
G46.0	19.7	17.8								
G47.0	17.3	15.5								
G48.0	15.7	14.3								
G49.0	13.7	12.6								
G50.0	12.3	11.5								
G51.0	11.3	10.5								
G52.0	10.6	9.6								
G53.0	9.9	8.9								
G54.0	9.1	8.4								
G55.0	8.7	8.0								
G56.0	8.3	7.6								
G57.0	7.8	7.1								
G58.0	7.0	6.7								
G59.0	6.6	6.2								
G60.0	6.2	6.0								
G61.0	5.6	5.4								
G62.0	5.2	5.3								
G63.0	5.0	4.8								
G64.0	4.5	4.5								
G65.0	4.1	4.1								
G66.0	3.8	3.9								
G67.0	3.4	3.6								
G68.0	3.2	3.5								
G69.0	2.9	3.4								
G70.0	2.9	3.2								
G71.0	2.5	3.1								
G72.0	2.5	2.7								
G73.0	2.2	2.7								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

[illegible]

Inspector: